

RECESSED

Hand dryer + Paper towel dispenser + Waste bin



DTES0040CS
Satin finish

General description

- Recessed combination towel dispenser, hand dryer and waste receptacle made of stainless steel AISI 304, with exposed surfaces in satin finish.
- Warp-free door equipped with piano hinge and secured by two tumbler locks
- Robust and vandal-resistant, suitable for high traffic facilities.
- Model suitable for public use.


Components and materials

- **CABINET:** made of stainless steel AISI 304, 0.8 mm thick, satin finish. Welded construction with seamless corners and burr-free edges
- **DOOR:** 2 units made of stainless steel AISI 304, 1.2 mm thick, satin finish. Secured to cabinet with a full-length stainless steel piano-hinge and tumbler locks keyed like other Mediclinics units
- **HAND DRYER:** type Saniflow, sensor operated. Equipped with a 5,500 rpm universal brushed motor. It includes an electronic infrared detection sensor for hand distance detection, which is adjustable. GS and CE certified.
- **PAPER TOWEL DISPENSER:** made of stainless steel AISI 304, 0.8 mm thick, satin finish. Rounded towel tray has hemmed opening to dispenser towels without tearing. Suitable for C-fold or multifold paper towels.
- **WASTE RECEPTACLE:** made of stainless steel AISI 304, 0.8 mm thick. Capacity: 24 L

Technical specifications

Dimensions	330 (W) x 1.660 (H) x 172 mm (D)
Door thickness	1,2 mm
Body and paper dispenser thickness	0,8 mm
C/Z paper towel capacity	300-500
Max. dimensions of paper towels	100 x 260 mm
Paper bin thickness	0,5 mm
Paper bin capacity	24 L
Hand dryer voltage / frequency	220-240 V 50/60 Hz
Electrical isolation	Clase I
Hand dryer total power	2.250 W
Electrical consumption	10 A
Air temperature	50 °C
Hand dryer air speed	100 Km/h
Sound pressure (at 2 m)	68dBA

Dimensions

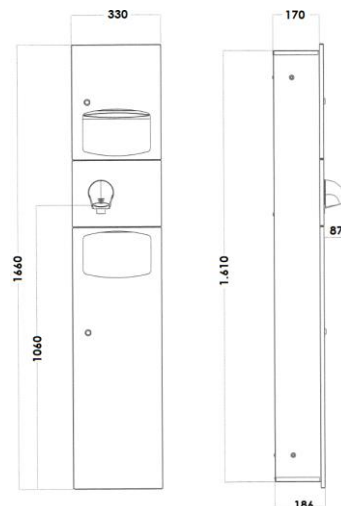

Dimensions: ± 4%

Operation

Pull the towel until it detaches from the appliance. Place the waste straight into the waste receptacle. Place hands under the air outlet grill. The dryer will start automatically. Repeat the action, at your own convenience.

Mounting template

Rough wall opening required is 288mm (W) x 1,613mm (H) x 173 mm (D). Secure with stainless steel screws at points indicated by an S in the following figure:

