

Wall mounted emergency eyewash

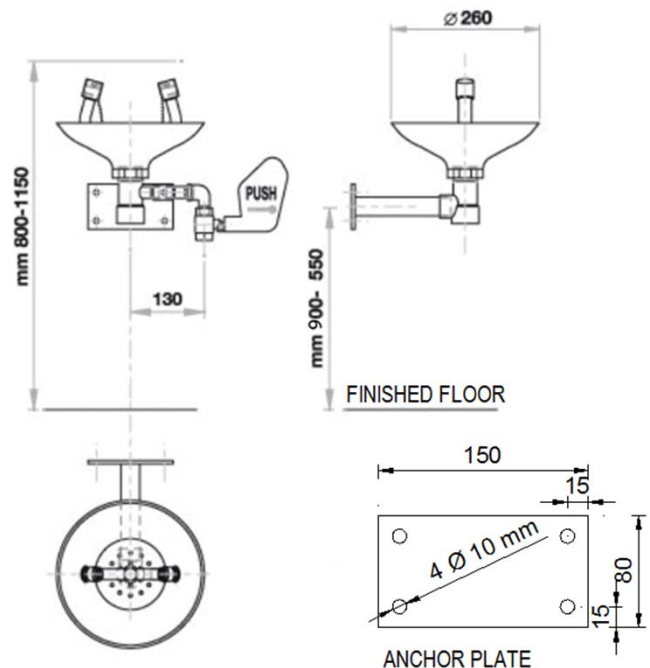

- Wall mounted emergency eyewash.
- High water flow and low water pressure.
- Instant automatic opening and closing activated by lateral lever.
- Double aerated jet with dust cover.
- Green color RAL 6029.
- Suitable for industries, laboratories and generally where there is risk of personal damages from fire, acids, chemical reactants, petroleum products, radioactive materials or other contaminants.
- CE conformity.

TECHNICAL DATA

- Stainless steel eye pan.
- Eye jet in polypropylene green color.
- Manufactured in zinc galvanized steel covered in epoxy paint.
- Connecting parts in brass.
- Water pressure, minimum 0.2MPa – max. 0.5 MPa.
- Water level: 14 l/min \pm 10%.
- Water entrance: screw of 1/2".
- Water exit: screw of 1+1/4".
- Recommended high installation: 800 – 1150 mm from finished floor.
- Dimensions: basin \varnothing 260 mm.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER or similar wall emergency eye, with high volume of flow at low pressure with total way out valve, automatic opening and manual closing with lateral lever. Body manufactured in zinc galvanized steel with green epoxy paint covering, collecting pan in stainless steel and jets in polypropylene green color.

TECHNICAL DRAWING


NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 export@nofer.com · www.nofer.com

Related Products

SC700

SC710

SC380

SC820

SC800

SC730