

THE GERM FREE AUTOMATED ENVIRONMENT

CATALOGUE



TIMELESS COMMITMENT

TO GREEN BUILDING AND WATER EFFICIENT ECO-FRIENDLY PRODUCTS

Stern was founded in 1989 and is a worldwide leader in the sanitary market producing touch free faucets, automatic soap dispensers, flush valves and related accessories.













Our wide array of intuitive electronic products and technologies improve the user experience and provide installation enhancements in over 135 countries around the globe.

Stern manufactures and machines all of its products and components, combining style and innovation with an extensive product line for both commercial and residential installations.

Stern has production facilities in Israel and the US that are equipped with advanced technologies and machineries run by a talented team of over 300 employees.

Stern remains at the very forefront of world technology and design with eco-friendly products that minimize the use of water and energy with quality designs according to new market trends.

WHAT'S INSIDE?


-  Deck mounted touch free and touch operated lavatory faucets in minimalist, angled or robust designs
-  Wall mounted touch free and touch operated faucets
-  Deck mounted touch free soap dispensers to be used with non-proprietary liquid or foam soap.
-  Wall mounted touch free soap dispensers to be matched with wall mounted faucets
-  Behind the mirror touch free faucets, soap dispensers and hand dryers with optional lockable cabinet.
-  Deck mounted or wall mounted hi-speed hand dryers in full brass or Stainless Steel AISI316
-  Touch free exposed or concealed flush valves for WC
-  Touch free exposed or concealed flush valves for Urinal
-  Iron mounting frame set for touch free faucet, soap dispenser and hand dryer
-  Electronically operated self-closing foot washers for heavy duty areas
-  Eco-friendly shower panels, shower controls and shower heads
-  Cost effective, heavy-duty thermostatic mixing valves



WHAT'S NEW?



Csaba Faucet & Csaba Soap Dispenser
The newest additions to our touch free deck mounted series are breaking design barriers. Meet Csaba, our matching faucet and soap dispenser now available in a wide range of special finishes.
Page 4 & 61

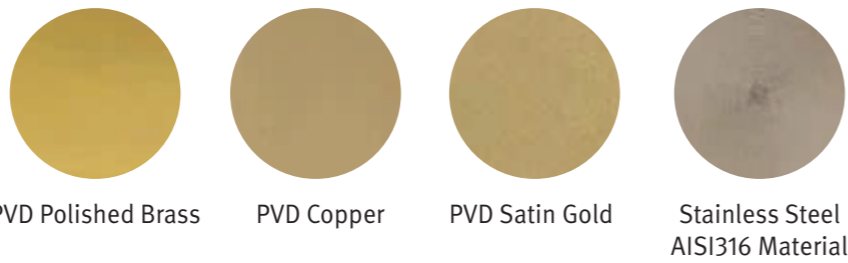

Prox Sensors with Special Finishes
Touch free prox sensor operation now available in a wide variety of special finishes to complete the interior design of your commercial restroom.
Page 58

Underbasin TMV

Our newest and upgraded version of our high quality thermostatic mixing valve, heavy-duty, solid brass and lead free, provides an innovative cost effective solution for safe water temperature delivery.

Page 145



Ever & Tubular Hand Dryers

Our selection of hi-speed hand dryers is now available in both deck mounted and wall mounted options and in full brass or Stainless Steel AISI316 material, also available in a variety of finishes.

Page 89-90



Perfect Time Shower Panel M

New self-closing shower panel activated by manual push button. The water flow will automatically shut off after a preset flow time, which is adjustable.

Page 104

Special Finishes


Selected products are now available in a wide variety of special finishes including Satin Gold, PVD Polished Brass, PVD Copper, PVD Rose Gold, PVD Antique Bronze, Matt Black OP, Stainless Steel AISI316 Material and Stainless Steel (Brushed Nickel).

Special finishes available with selected products

Connected Washrooms

Our Bluetooth App allows customization of the adjustable functions of all Stern touch free sanitary products that are equipped with a compatible sensor, providing greater efficiency with essential benefits.

Available upon request, ask your sales manager for details.

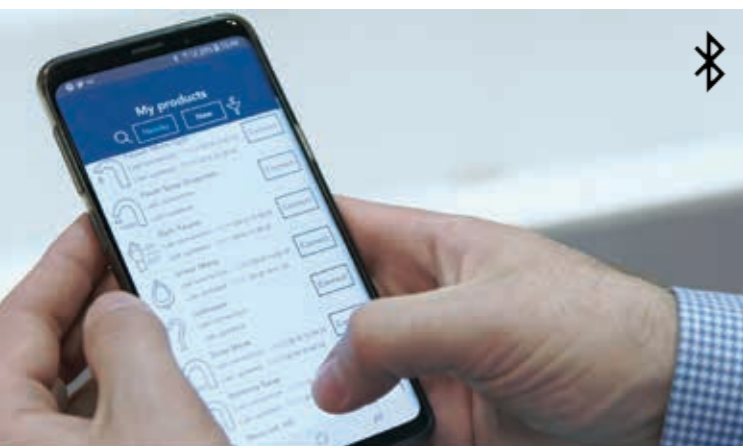



INDEX



LAVATORY FAUCETS **1-36**



WALL MOUNTED FAUCETS **37-58**



SOAP DISPENSERS **59-86**



HAND DRYERS &
BEHIND THE MIRROR **87-96**



SHOWERS **97-112**



URINALS & TOILETS **113-132**



IRON FRAME SETS **133-140**



COMPONENTS & ACCESSORIES **141-150**

LAVATORY FAUCETS

1-36



CSABA SERIES 3-4



TRENDY SERIES 5-10



EXTREME SERIES 11-16



ELITE SERIES 17-18



SMART SERIES 19-20



GREEN SERIES 21-24



TOUCH FREE 25



TOUCH SERIES 26



TUBULAR DM 27



EASY SERIES 28



SWAN SERIES 29-30



CLASSIC SERIES 31-32



CONDOR SERIES 33



DOLPHIN SERIES 34



COOL SERIES 35-36

CSABA SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water. Activated by concealed IR sensor built into the spout.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Minimalist design with an emotional appeal, perfectly balanced due to its tempting rounded edges and smooth transitions
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
1.89 LPM	0.5 GPM	PCA Spray
4 LPM	1.0 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CSABA B	Standard IP67 dual power input box that allows the faucet to be used with 9V battery or 9V transformer. Can be powered by a 9V transformer and an integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure.	9V Battery	233000	
	CSABA E		9V Transformer	233010	
	CSABA 1000 B	Mixer to adjust water temperature IP67 dual power input box that allows the faucet to be used with 9V battery or 9V transformer. Can be powered by a 9V transformer and an integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure.	9V Battery	233020	
	CSABA 1000 E		9V Transformer	233030	

TRENDY SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water, long spout, tall versions for counter top sinks and ring illumination models.


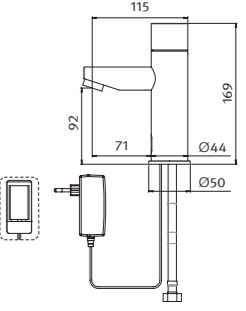

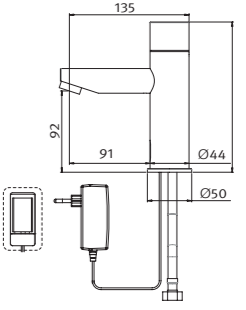

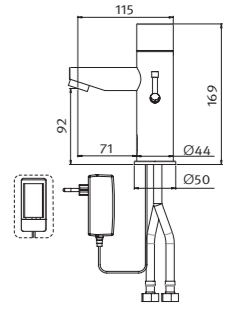

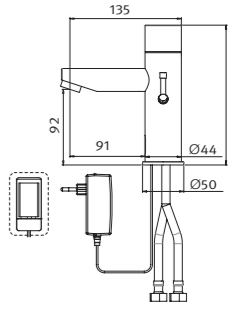

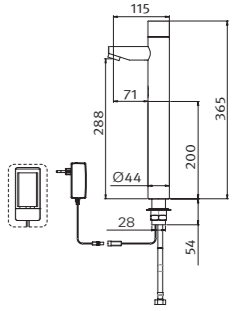

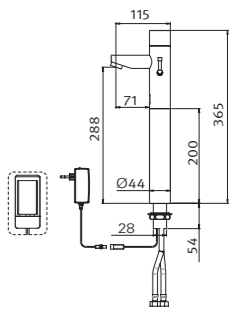
Advantages:


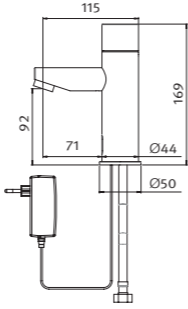

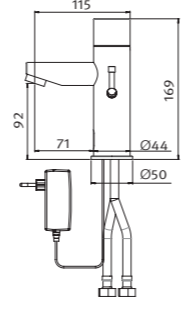

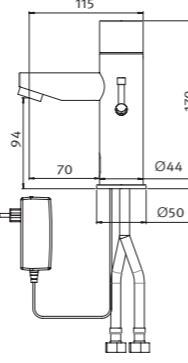
- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY B	Standard	9V Battery	239000	
	TRENDY E		9V Transformer	239100	
	TRENDY LB	Long spout 90mm	9V Battery	239400	
	TRENDY LE		9V Transformer	239500	
	TRENDY 1000 B	Mixer to adjust water temperature	9V Battery	239200	
	TRENDY 1000 E		9V Transformer	239300	
	TRENDY 1000 LB	Mixer to adjust water temperature. Long spout 90mm	9V Battery	239600	
	TRENDY 1000 LE		9V Transformer	239700	
	TRENDY PLUS B	Tall version for counter top wash basins	9V Battery	239050	
	TRENDY PLUS E		9V Transformer	239150	
	TRENDY 1000 PLUS B	Tall version for counter top wash basins. Mixer to adjust water temperature	9V Battery	239250	
	TRENDY 1000 PLUS E		9V Transformer	239350	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY BRE	Permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	239105	
	TRENDY 1000 BRE	Mixer to adjust water temperature Permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	239305	
	TRENDY HABITAT E	Mixer to adjust water temperature Alternative touch operation and ring illumination. Includes a piezo element integrated in the faucet cap for alternative touch operation, used to fill in the sink or a pan. When a user touches the piezo area a flow cycle of 20 seconds is completed. The ring of light will blink while water runs out of the faucet.	9V Transformer	239340	



TRENDY TOUCH SERIES

Electronic lavatory faucet operated by touch.

Features a Piezo element integrated in the faucet cap. Series includes options for cold or premixed water as well as hot and cold water. Includes ring illuminated versions.









Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY TOUCH B	Standard	9V Battery	239020	
	TRENDY TOUCH E		9V Transformer	239120	
	TRENDY TOUCH 1000 B	Mixer to adjust water temperature	9V Battery	239220	
	TRENDY TOUCH 1000 E		9V Transformer	239320	
	TRENDY TOUCH BRE	Features a ring of light. When a user touches the designated area in the middle of the ring of light a flow cycle of 8 seconds is completed. The ring of light blinks while water runs out of the faucet. If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, thus, saving more water.	9V Transformer	239130	
	TRENDY TOUCH 1000 BRE	Mixer to adjust water temperature. Features a ring of light. When a user touches the designated area in the middle of the ring of light a flow cycle of 8 seconds is completed. The ring of light blinks while water runs out of the faucet. If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, thus, saving more water.	9V Transformer	239330	

TRENDY T SERIES

Electronic lavatory faucet operated by IR sensor.

Features an integrated thermostatic mixer for an anti scalding operation and temperature control.

Advantages:

- Lead free
- Thermostatic control for optimum temperature
- Internal stopper allows setting the maximum temperature according to the project requirements
- No physical contact. Helps to protect users against cross contamination and Legionnaire's disease
- Ideal for the healthcare sector
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser

TEMPERATURE FEATURES

HOT LIMIT STOPPER - Mechanical mechanism for built in maximum temperature control at 48.9°C (120°F), factory set. Other values available upon request

COMFORT STOP - Allows limiting the hot water temperature the user can reach, from 38°C (100.4°F) to 48.9°C (120°F).

FIXED TEMPERATURE - Allows the technical staff to set a stable temperature and fix the faucet cap to the specific temperature only.



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



LEED RATING



PREVENT SCALDING



STERN MEDICAL

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY TB	Integrated thermostatic mixer to adjust water temperature	9V Battery	236930	
	TRENDY TE		9V Transformer	236935	

SSR PCA STREAM AERATOR (for more options see water saving options)

IR SENSOR WITH:

- 15 seconds run flow time
- 7 (seven) minutes hot water recirculation function operated by remote control
- Sensor functions adjustable by remote control

SOLENOID VALVE

FAUCET INSERT & FLEXIBLE PIPES


METAL THERMOSTATIC MIXING HANDLE

THERMOSTATIC CARTRIDGE INTEGRATED WITH A HOT LIMIT STOPPER AND COMFORT STOP

FULL BRASS FAUCET BODY

IP67 BATTERY BOX

REMOTE CONTROL

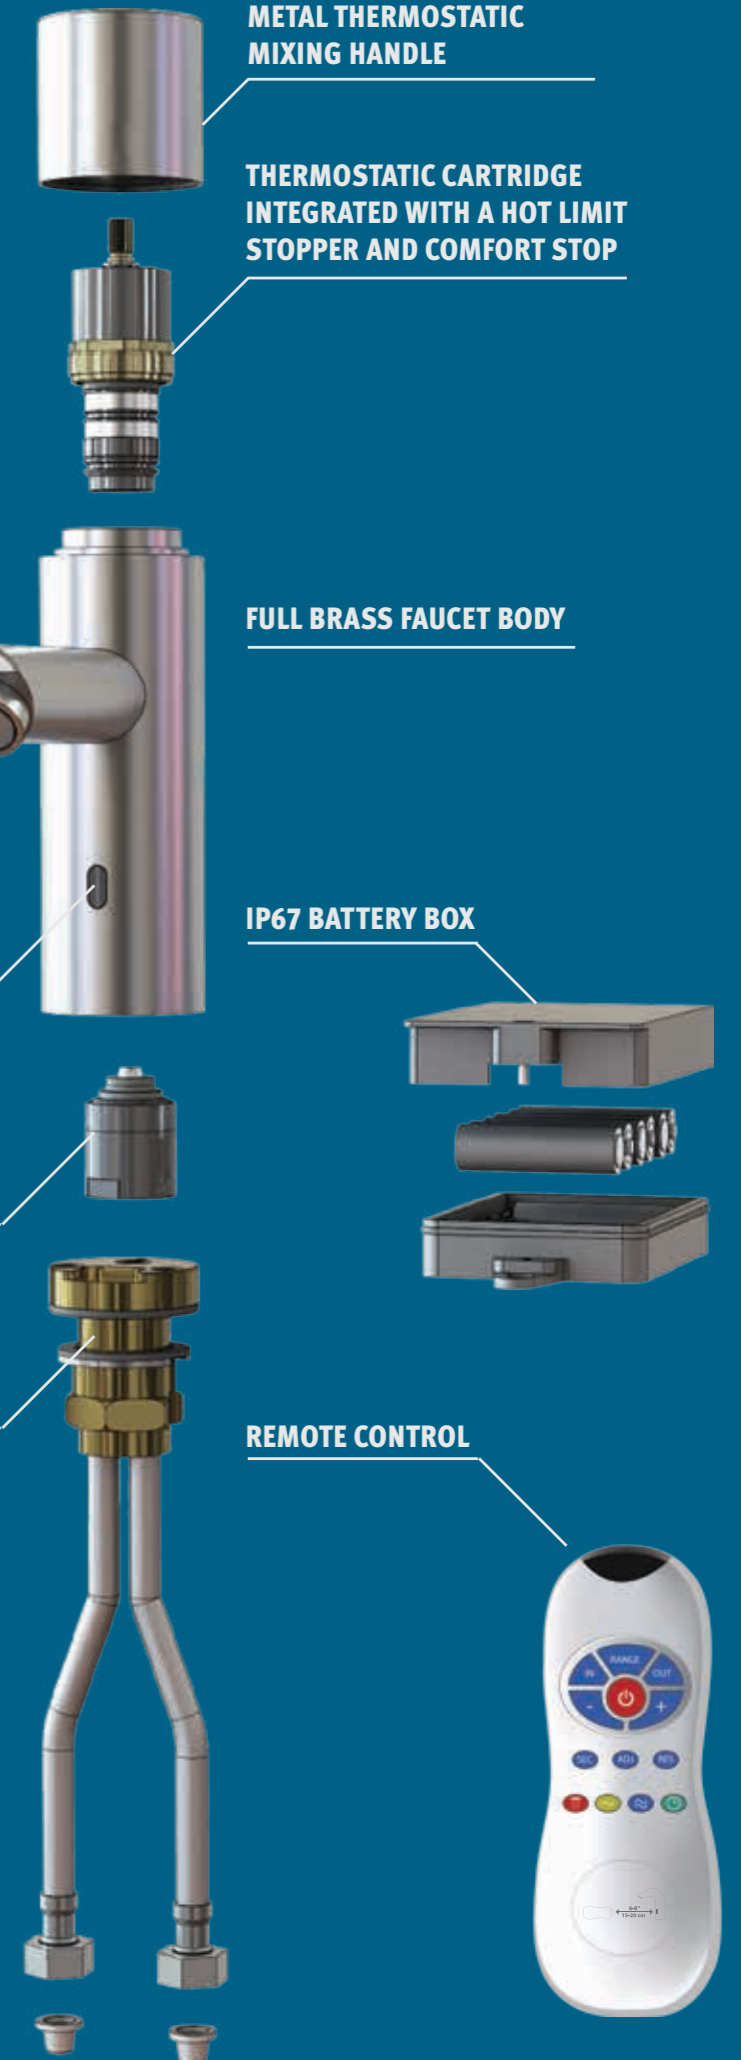

EXTREME LF SERIES

Electronic lavatory faucet operated by IR sensor.
Lead free faucet for cold or premixed water with a concealed sensor integrated into the spout.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Minimalist design with an emotional appeal, perfectly balanced due to its tempting rounded edges and smooth transitions
- Sensor settings adjustable by remote control
- Easy installation
- The stainless steel AISI316 version is especially valued for its anti-corrosion properties in coastal environments.



WATER SAVING OPTIONS		
4 LPM	1 GPM	Honeycomb TT
1.89 LPM	0.5 GPM	PCA Spray



LEED RATING

EXTREME SERIES

Electronic lavatory faucet operated by IR sensor.
Series includes options for cold or premixed water as well as hot and cold water, long spout and tall versions for counter top sinks.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Minimalist design with an emotional appeal, perfectly balanced due to its tempting rounded edges and smooth transitions
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



LEED RATING




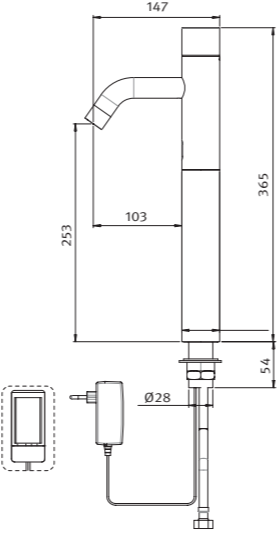

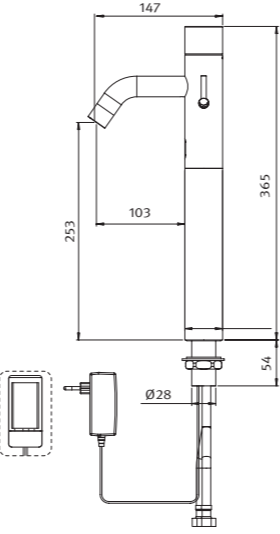

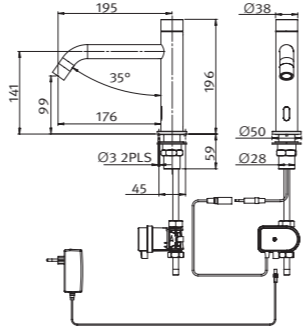

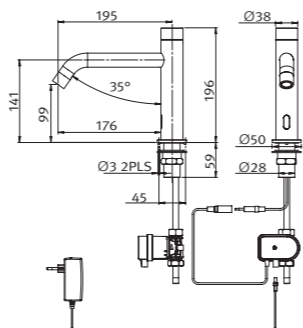
LEED COLORS


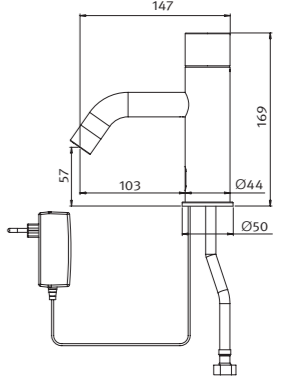

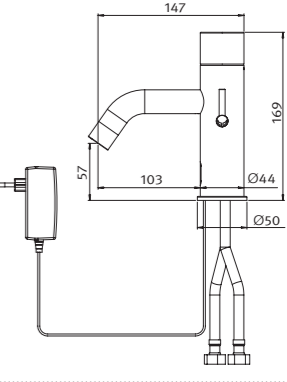

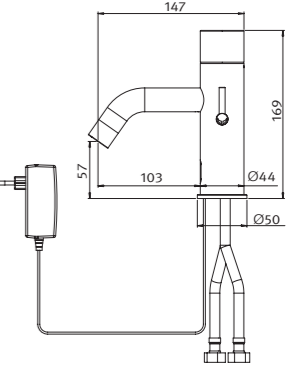
WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME LFB	Lead free version with concealed sensor at the spout	9V Battery	237820	
	EXTREME LFE		9V Transformer	237810	
	EXTREME LFB AISI316	Stainless steel AISI 316 body. Ideal for medical and coastal environments	9V Battery	237821	
	EXTREME LFE AISI316		9V Transformer	237811	
	EXTREME 1000 LFB	Mixer to adjust water temperature	9V Battery	237102	
	EXTREME 1000 LFE		9V Transformer	237003	
	EXTREME 1000 LFB AISI316	Mixer to adjust water temperature	9V Battery	237103	
	EXTREME 1000 LFE AISI316		9V Transformer	237004	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME B	Standard	9V Battery	237200	
	EXTREME E		9V Transformer	237300	
	EXTREME 1000 B	Mixer to adjust water temperature	9V Battery	237100	
	EXTREME 1000 E		9V Transformer	237000	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME PLUS B	Tall version for counter top wash basins	9V Battery	237250	
	EXTREME PLUS E		9V Transformer	237350	
	EXTREME 1000 PLUS B	Tall version for counter top wash basins. Mixer to adjust water temperature	9V Battery	237150	
	EXTREME 1000 PLUS E		9V Transformer	237050	
	EXTREME HLB	Long spout 176mm. Body diameter Ø38. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium Battery, which enables the product to be used normally in case of a power failure.	9V Battery	237317	
	EXTREME HLE		9V Transformer	237316	
	EXTREME HLB LF	Long spout 176mm. Body diameter Ø38. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium Battery, which enables the product to be used normally in case of a power failure. Lead Free versions	9V Battery	237340	
	EXTREME HLE LF		9V Transformer	237341	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME BRE	Standard Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	237305	
	EXTREME 1000 BRE	Mixer to adjust water temperature Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	237005	
	EXTREME HABITAT E	Mixer to adjust water temperature. Alternative touch operation. Includes a piezo element integrated in the faucet cap for alternative touch operation, used to fill in the sink or a pan. When a user touches the piezo area a flow cycle of 20 seconds is completed. The ring of light will blink while water runs out of the faucet. Ring illumination	9V Transformer	237040	



EXTREME TOUCH SERIES

Electronic lavatory faucet operated by touch.

Features a Piezo element integrated in the faucet cap. Series includes options for cold or premixed water as well as hot and cold water. Includes ring illuminated versions.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser













LEED RATING



LED COLORS

WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME TOUCH B	Standard	9V Battery	237210	
	EXTREME TOUCH E		9V Transformer	237310	
	EXTREME TOUCH 1000 B	Mixer to adjust water temperature	9V Battery	237110	
	EXTREME TOUCH 1000 E		9V Transformer	237010	
	EXTREME TOUCH BRE	Features a ring of light. When a user touches the designated area in the middle of the ring of light a flow cycle of 8 seconds is completed. The ring of light blinks while water runs out of the faucet. If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, thus, saving more water.	9V Transformer	237320	
	EXTREME TOUCH 1000 BRE	Mixer to adjust water temperature. Features a ring of light. When a user touches the designated area in the middle of the ring of light a flow cycle of 8 seconds is completed. The ring of light blinks while water runs out of the faucet. If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, thus, saving more water.	9V Transformer	237020	

ELITE SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water, long spout and tall versions for counter top sinks.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Minimalist design with an emotional appeal, perfectly balanced due to its tempting rounded edges and smooth transitions.
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE B	Standard	9V Battery	236300	
	ELITE E		9V Transformer	236400	
	ELITE E AISI316		9V Transformer	236404	
	ELITE 1000 B	Mixer to adjust water temperature	9V Battery	236700	
	ELITE 1000 E		9V Transformer	236800	
	ELITE 1000 E AISI316		9V Transformer	236803	
	ELITE LB	Extra long spout 138mm	9V Battery	236500	
	ELITE LE		9V Transformer	236600	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE 1000 LB	Mixer to adjust water temperature. Extra long spout 138mm	9V Battery	236550	
	ELITE 1000 LE		9V Transformer	236650	
	ELITE PLUS B	Tall version for counter top wash basins	9V Battery	236350	
	ELITE PLUS E		9V Transformer	236450	
	ELITE PLUS E AISI316		9V Transformer	236453	
	ELITE 1000 PLUS B	Tall version for counter top wash basins. Mixer to adjust water temperature	9V Battery	236750	
	ELITE 1000 PLUS E		9V Transformer	236850	
	ELITE 1000 B with Technician's Mixer	Mixer to adjust water temperature and technician's mixer option Allows removing the mixing handle so that the maintenance staff can adjust the water temperature without giving that possibility to the end user.	9V Battery	236720	
	ELITE 1000 E with Technician's Mixer		9V Transformer	236805	

SMART SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water, long spout and tall versions for counter top sinks.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	SMART B	Standard	9V Battery	235100	
	SMART E		9V Transformer	235200	
	SMART 1000 B	Mixer to adjust water temperature	9V Battery	235500	
	SMART 1000 E		9V Transformer	235600	
	SMART LB	Long spout 90mm	9V Battery	235110	
	SMART LE		9V Transformer	235210	
	SMART 1000 LB	Long spout 90mm Mixer to adjust water temperature	9V Battery	235510	
	SMART 1000 LE		9V Transformer	235610	
	SMART PLUS B	Tall version for counter top wash basins	9V Battery	235150	
	SMART PLUS E		9V Transformer	235250	
	SMART 1000 PLUS B	Tall version for counter top wash basins. Mixer to adjust water temperature	9V Battery	235550	
	SMART 1000 PLUS E		9V Transformer	235650	

GREEN SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water. Includes ring illuminated versions (electricity operated only).


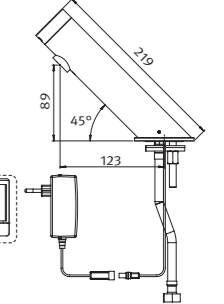
Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Timeless design based on elementary forms
- Lead Free
- Versions with internal battery for theft prevention
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	GREEN AB1953	Internal Battery	9V Battery	225901	
	GREEN B AB1953	Standard	9V Battery	225951	
	GREEN E AB1953		9V Transformer	225941	
	GREEN BRE AB1953	Ring Illumination Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	225921	
	GREEN 1000 AB1953	Mixer to adjust water temperature. Internal Battery	9V Battery	225801	
	GREEN 1000 B AB1953	Mixer to adjust water temperature	9V Battery	225871	
	GREEN 1000 E AB1953		9V Transformer	225821	
	GREEN 1000 BRE AB1953	Mixer to adjust water temperature. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	225891	

GREEN TIME SERIES

Electronic lavatory faucet operated by touch.

Features a Piezo element integrated in the faucet cap. Series includes options for cold or premixed water as well as hot and cold water. Includes ring illuminated versions (electricity operated only).

Advantages:

- Drastically reduces water consumption
- Timeless design based on elementary forms
- Lead Free
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	GREEN TIME AB1953	Internal Battery	9V Battery	225911	
	GREEN TIME B AB1953	Standard	9V Battery	225981	
	GREEN TIME E AB1953		9V Transformer	225971	
	GREEN TIME BRE AB1953	Ring Illumination Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	225926	
	GREEN TIME 1000 AB1953	Mixer to adjust water temperature. Internal Battery	9V Battery	225811	
	GREEN TIME 1000 B AB1953	Mixer to adjust water temperature	9V Battery	225881	
	GREEN TIME 1000 E AB1953		9V Transformer	225831	
	GREEN TIME 1000 BRE AB1953	Mixer to adjust water temperature. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	225836	

TOUCH FREE SERIES

Electronic lavatory faucet operated by IR sensor.
Includes options for cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Lead Free
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
5 LPM	1.32 GPM	Cache
1.89 LPM	0.5 GPM	PCA Spray



TOUCH SERIES

Electronically operated self-closing faucet operated by touch.
Features a Piezo element integrated in the faucet cap.
For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
5 LPM	1.32 GPM	Cache
1.89 LPM	0.5 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TOUCH FREE B AB1953	Standard	9V Battery	225610	
	TOUCH FREE E AB1953		9V Transformer	225710	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TOUCH B	Standard	9V Battery	225100	
	TOUCH E		9V Transformer	225200	
	TOUCH BRE	Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	225500	

TUBULAR DM SERIES

Electronic lavatory faucet operated by IR sensor.
For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Versions with internal battery for theft prevention
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser



LEED RATING

WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

EASY SERIES

Electronic lavatory faucet operated by IR sensor.
Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- One piece construction, ideal for heavy duty areas
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve (Easy 1000 version only)
- Matching IR operated soap dispenser



LEED RATING

WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR DMB	Standard	9V Battery	350700	
	TUBULAR DME	Optional: IP67 Dual power input box that allows the faucet to be used with a 9V battery or a 9V transformer. Tubular DM could be also be powered by a 9V transformer and an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Transformer	350750	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EASY B	Standard	9V Battery	246010	
	EASY E		9V Transformer	246020	
	EASY 1000 VB	Mixer to adjust water temperature with technician's mixer option that allows removing the mixing handle so that the maintenance staff can adjust the water temperature without giving that possibility to the end user.	9V Battery	246050	
	EASY 1000 VE		9V Transformer	246060	

SWAN SERIES

Electronic lavatory faucet operated by IR sensor.

Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Lead free (Except for BM versions)
- One piece construction, ideal for heavy duty areas
- Versions with internal battery for theft prevention
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	SWAN 1010 AB1953	Internal Battery	9V Battery	250220	
	SWAN 1010 B AB1953	Standard	9V Battery	250310	
	SWAN 1010 E AB1953		9V Transformer	250420	
	SWAN 1000 AB1953	Internal Battery	9V Battery	252210	
	SWAN 1000 B AB1953	Standard	9V Battery	252310	
	SWAN 1000 E AB1953		9V Transformer	252420	
	SWAN 1000 BM	Override handle to enable manual operation Allows the user to operate the faucet by the IR sensor without physical contact or manually using the left handle, operating the faucet the conventional way.	9V Battery	252301	
	SWAN 1000 EM		9V Transformer	252401	

CLASSIC SERIES

Electronic lavatory faucet operated by IR sensor.


Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Robust, one piece construction, ideal for heavy duty areas
- Versions with internal battery for theft prevention
- Sensor settings adjustable by remote control
- Easy installation



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

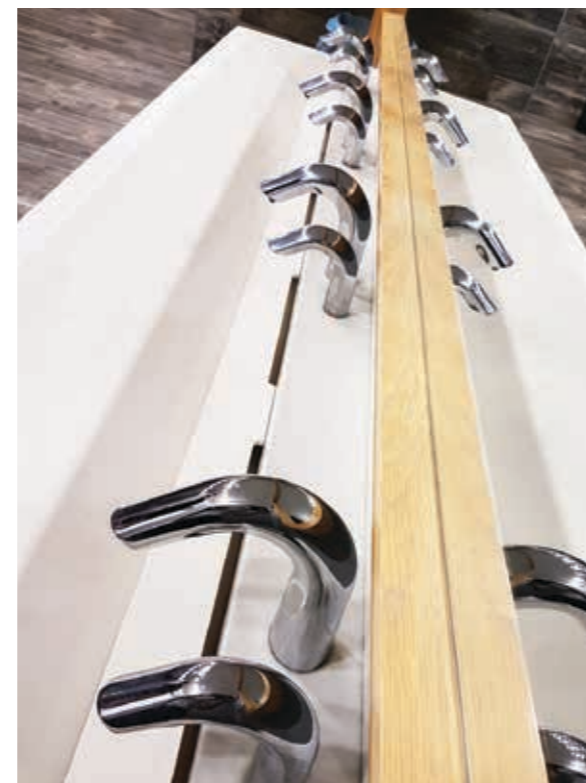

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CLASSIC CS B	Internal Battery Concealed sensor for optimal quicker response from the sensor	9V Battery	293100	
	CLASSIC CS E	Internal Battery Concealed sensor for optimal quicker response from the sensor	9V Transformer	293200	
	CLASSIC AB1953	Internal Battery	9V Battery	291010	
	CLASSIC B AB1953	Standard	9V Battery	291110	
	CLASSIC E AB1953		9V Transformer	291210	
	CLASSIC 1000 AB1953	Internal Battery	9V Battery	292020	
	CLASSIC 1000 B AB1953	Standard	9V Battery	292120	
	CLASSIC 1000 E AB1953		9V Transformer	292230	

CONDOR SERIES

Electronic lavatory faucet operated by IR sensor.
For cold or premixed water.
Integrated panel versions.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Lead Free
- Versions with integrated panel to cover old installation holes
- Sensor settings adjustable by remote control
- Easy installation



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



DOLPHIN SERIES

Electronic lavatory faucet operated by IR sensor.
Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Ideal for the healthcare sector.
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve (Dolphin 1000 models only)



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CONDOR 1010	Standard IP67 Dual power input box that allows the faucet to be used with a 9V battery or a 9V transformer. Condor 1010 can be also be powered by a 9V transformer and an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Battery	210100	
	CONDOR 1010 E		9V Transformer	210300	
	CONDOR	Integrated panel IP67 Dual power input box that allows the faucet to be used with a 9V battery or a 9V transformer. Condor can be also be powered by a 9V transformer and an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Battery	210000	
	CONDOR E		9V Transformer	210200	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	DOLPHIN FB	Standard	9V Battery	270170	
	DOLPHIN FE		9V Transformer	270180	
	DOLPHIN 1000 FB	Mixer to adjust water temperature Internal solenoid	9V Battery	270320	
	DOLPHIN 1000 FE		9V Transformer	270330	
	DOLPHIN GB	Gooseneck tall spout	9V Battery	270120	
	DOLPHIN GE		9V Transformer	270220	

COOL SERIES

Electronically operated self closing glass filler faucet operated by touch.
Operated by a Piezo element integrated in the faucet body.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Lead free
- Easy touch activation to allow use by young children, elderly and disabled people
- Ideal for drinking fountains, coolers and water stations at the gym
- Stable and accurate water flow that can be changed on site to fill in a specific glass or bottle size
- Designed for bars, restaurants and commercial food service kitchens
- Easy installation



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	COOL B	Long reach spout	9V Battery	280115	
	COOL E		9V Transformer	280110	
	COOL BRE	Long reach spout. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	280100	
	COOL GB	Standard	9V Battery	280125	
	COOL GE		9V Transformer	280130	
	COOL GBRE	Ring illumination Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	280120	

WALL MOUNTED FAUCETS

37-58



D28 SERIES 39-41



MALMO SERIES 42



TUBULAR SERIES 43-48



EXTREME CS SERIES 49-50



QUADRAT SERIES 51-52



NARA Q 53



APOLLO AL 54



MEDICAL SERIES 55-56



APOLLO FREE 57



WASHFREE 1000 57



PROX, WAVE & TOUCH SOLUTIONS 58

D28 SERIES

Electronic wall mounted faucet operated by IR sensor.
For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Lead free (D28 & D28 prox models)
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser




LEED RATING



IRON FRAME AVAILABLE

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Honeycomb TT
1.89 LPM	0.5 GPM	PCA Spray

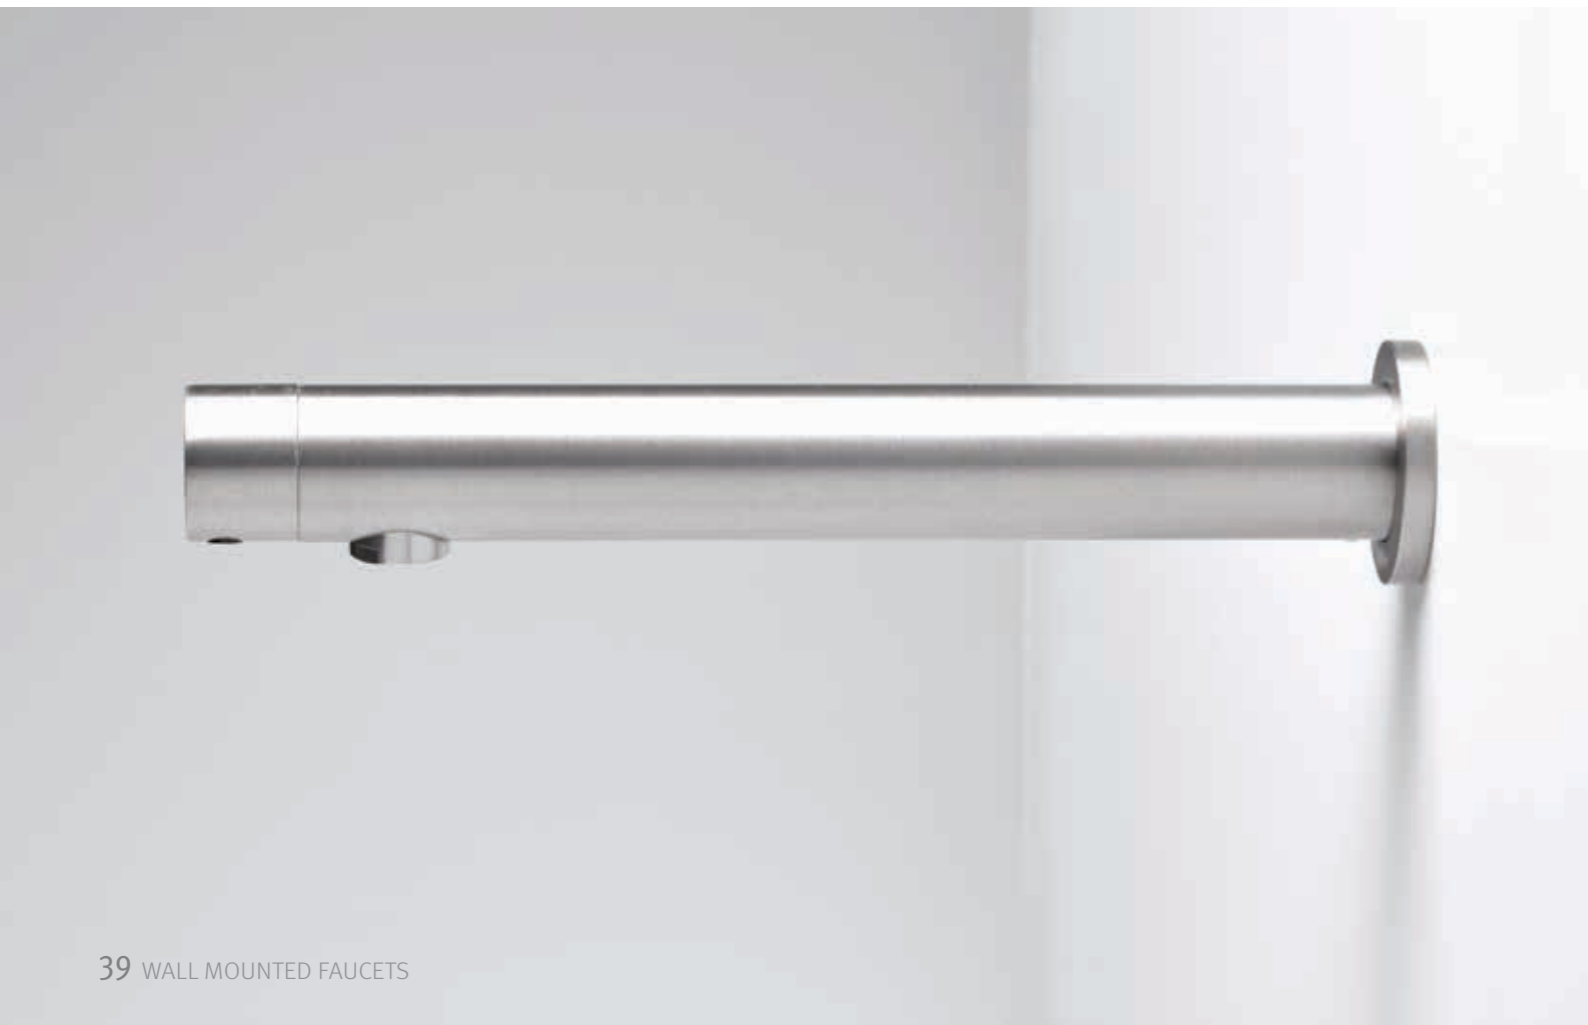

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	D28 B	Concealed installation in dry walls. Iron frame available (see page 135)	9V Battery	352000	
	D28 E	Concealed installation in dry walls. Iron frame available (see page 135)	9V Transformer	352100	
	D28 AISI316	Stainless steel 316 body. Concealed installation in dry walls. Iron frame available (see page 135)	9V Battery	352130	
	D28 E AISI316	Stainless steel 316 body. Concealed installation in dry walls. Iron frame available (see page 135)	9V Transformer	352120	
	D28 DUAL POWER B	Concealed installation in dry walls as well as concrete, brick walls. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium Battery, which enables the product to be used normally in case of a power failure.	9V Battery	352300	
	D28 DUAL POWER E	Concealed installation in dry walls as well as concrete, brick walls. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium Battery, which enables the product to be used normally in case of a power failure.	9V Transformer	352400	
	D28 DPB AISI316	Stainless steel 316 body. Concealed installation in dry walls as well as concrete, brick walls. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Battery	352301	
	D28 DPE AISI316	Stainless steel 316 body. Concealed installation in dry walls as well as concrete, brick walls. Dual power input box. When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Transformer	352401	
	D28 PROX B	Concealed installation in dry walls. Prox sensor unit	9V Battery	352600	
	D28 PROX E	Concealed installation in dry walls. Prox sensor unit	9V Transformer	352610	

D28 TOUCH SERIES

Electronically operated self closing faucet operated by touch.
Features a Piezo element integrated in the faucet cap.
For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
5 LPM	1.32 GPM	Honeycomb TT
1.89 LPM	0.5 GPM	PCA Spray

MALMO SERIES

Electronic wall mounted faucet operated by IR sensor.
Solenoid valve, sensor and battery are integrated in the spout.
Series includes options for cold or premixed water as well as hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Since the sensor, solenoid and battery are inside the body, servicing can be done from the front
- Sensor settings adjustable by remote control
- Easy installation
- Internal solenoid valve
- Matching IR operated soap dispenser



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	D28 TOUCH DUAL POWER B	Concealed installation in dry walls or brick concrete walls. Powered by an external IP67 Dual power input box, allows the faucet to be used with a 9V battery or a 9V transformer. The product could also be powered by a 9V transformer and an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.	9V Battery	352700	
	D28 TOUCH DUAL POWER E		9V Transformer	352710	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	MALMO	Concealed installation in concrete, brick walls	9V Battery	225865	
	MALMO 1000	Concealed installation in concrete, brick walls. Mixer to adjust water temperature	9V Battery	225860	

TUBULAR SERIES

Electronic wall mounted faucet operated by IR sensor.
Series includes options for cold or premixed water as well as hot and cold water, long spout and various installation options.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser




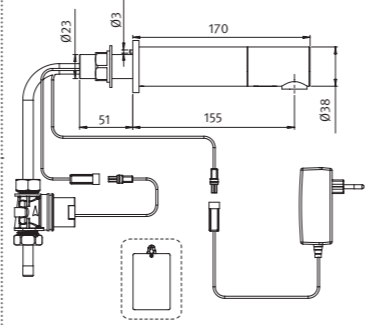

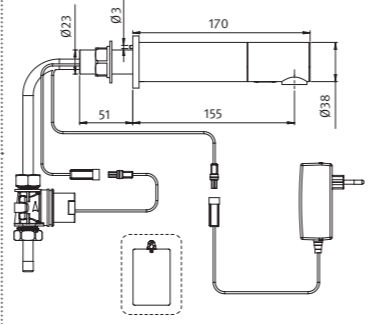
LEED RATING


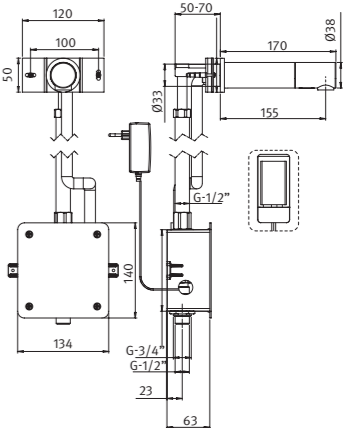

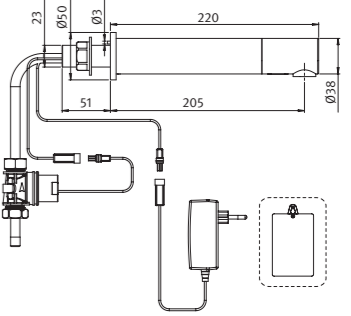

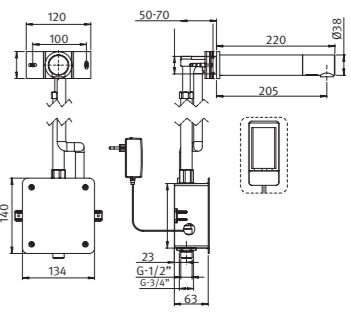

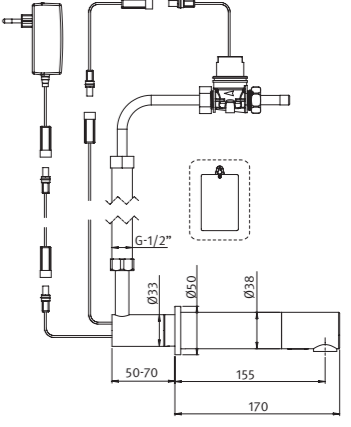


IRON FRAME AVAILABLE

WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR B	Concealed installation in dry walls	6 x 1.5 AA Batteries	350200	
	TUBULAR E		9V Transformer	350100	
	TUBULAR B AISI316	Stainless steel 316 body. Concealed installation in dry walls	6 x 1.5 AA Batteries	350208	
	TUBULAR E AISI316	Iron frame available (see page 135)	9V Transformer	350109	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR 2030 B	Concealed installation in concrete or brick walls.	9V Battery	350300	
	TUBULAR 2030 E		9V Transformer	350400	
	TUBULAR LB	Concealed installation in dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	350210	
	TUBULAR LE		9V Transformer	350120	
	TUBULAR 2030 LB	Concealed installation in concrete or brick walls. Long spout 220 mm	9V Battery	350310	
	TUBULAR 2030 LE		9V Transformer	350410	
	TUBULAR CB	Installation from ceiling	6 x 1.5 AA Batteries	350500	
	TUBULAR CE		9V Transformer	350600	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR XLB	Concealed installation in dry walls	6 x 1.5 AA Batteries	350215	
	TUBULAR XLE	Extra long spout 295 mm	9V Transformer	350415	
	TUBULAR PERTH B	Concealed installation in dry walls	6 x 1.5 AA Batteries	350207	
	TUBULAR PERTH E	Integrated thermostatic mixing valve	9V Transformer	350107	
	TUBULAR TB	Concealed installation in dry walls	6 x 1.5 AA Batteries	350202	
	TUBULAR TE	Integrated thermostatic mixing valve	9V Transformer	350102	
	TUBULAR 1000 B	Concealed installation in dry walls	6 x 1.5 AA Batteries	350800	
	TUBULAR 1000 E		9V Transformer	350850	
	TUBULAR 1000 B BOX	Installation in concrete or brick walls	9V Battery	350900	
	TUBULAR 1000 E BOX		9V Transformer	350950	

TUBULAR WAVE DP LE

Electronic wall mounted faucet operated by wave on-off IR sensor.

For cold or premixed water.

Options for installation with iron frame.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Suits any washroom due to its minimalist design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser



LEED RATING



IRON FRAME AVAILABLE

WATER SAVING OPTIONS

6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR WAVE DP LE	<p>Concealed installation in dry walls as well as concrete, brick walls.</p> <p>Dual power input box.</p> <p>When powered by a 9V transformer features an integrated backup system to be used with a 9V Lithium battery, which enables the product to be used normally in case of a power failure.</p> <p>Allows activation of the faucet once the users place their hands at a close proximity to the sensor.</p> <p>Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.</p> <p>Iron frame available (see page 135)</p>	9V Transformer	350190	

TUBULAR TOUCH SERIES

Electronically operated self closing faucet operated by touch.
Features a Piezo element integrated in the faucet cap.
For cold or premixed water.
Includes ring illuminated versions (electricity operated only).




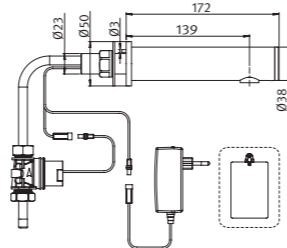

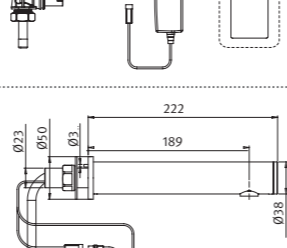

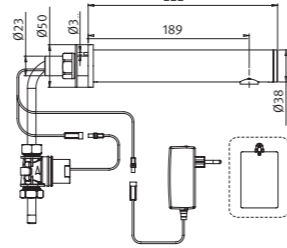

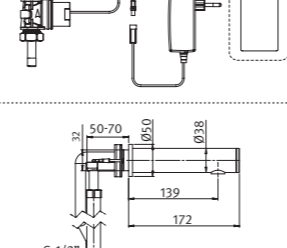

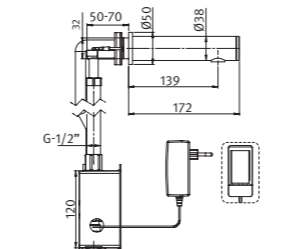

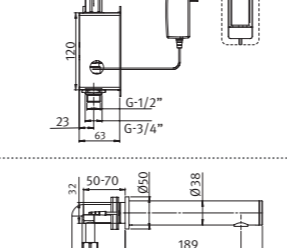

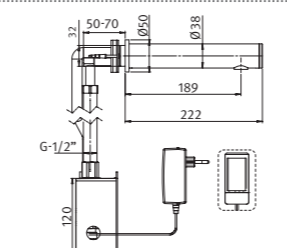

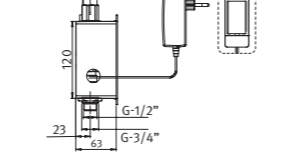
Advantages:


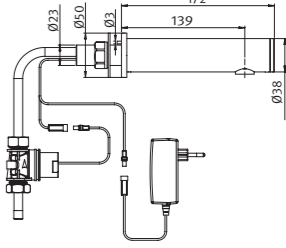

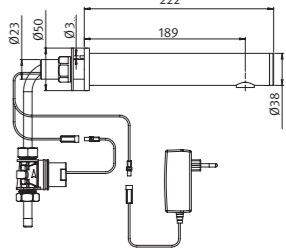

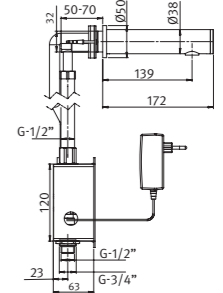

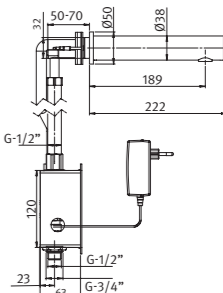
- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Easy installation

WATER SAVING OPTIONS

5 LPM	1.32 GPM	Cache Honeycomb TJ
1.89 LPM	0.5 GPM	Cache PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR TOUCH B		6 x 1.5 AA Batteries	350140	
	TUBULAR TOUCH E	Concealed installation in dry walls	9V Transformer	350130	
	TUBULAR TOUCH LB	Concealed installation in dry walls.	6 x 1.5 AA Batteries	350250	
	TUBULAR TOUCH LE	Long spout 220 mm	9V Transformer	350150	
	TUBULAR TOUCH 2030 B		9V Battery	350350	
	TUBULAR TOUCH 2030 E	Concealed installation in concrete or brick walls	9V Transformer	350450	
	TUBULAR TOUCH 2030 LB	Concealed installation in concrete or brick walls.	9V Battery	350320	
	TUBULAR TOUCH 2030 LE	Long spout 220 mm	9V Transformer	350420	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR TOUCH BRE	Concealed installation in dry walls. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	350170	
	TUBULAR TOUCH BR LE	Concealed installation in dry walls. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet. Long spout 220 mm	9V Transformer	350180	
	TUBULAR TOUCH 2030 BRE	Concealed installation in concrete or brick walls. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet.	9V Transformer	350460	
	TUBULAR TOUCH 2030 BR LE	Concealed installation in concrete or brick walls. Features a permanent ring illumination. When a user places his hands within the sensor range, the ring of light blinks while water runs out of the faucet. Long spout 220 mm	9V Transformer	350330	

EXTREME CS SERIES

Electronic wall mounted faucet operated by IR concealed sensor integrated into the spout.

For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser
- Stainless steel AISI 316 spout available upon request



WATER SAVING OPTIONS		
4 LPM	1 GPM	Honeycomb TT
1.89 LPM	0.5 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME CS B			237801	
	EXTREME CS B AISI316	Concealed installation in dry walls. IP67 Dual power input box that allows the faucet to be used with a 9V battery or a 9V transformer.	9V Battery	237801-316	
	EXTREME CS E			237800	
	EXTREME CS E AISI316	Dual power input box used as an integrated backup system with a 9V Lithium battery, for continued use in case of power failure.	9V Transformer	237800-316	
	EXTREME CS DPB			237802	
	EXTREME CS DPB AISI316	Concealed installation in brick walls. IP67 Dual power input box that allows the faucet to be used with a 9V battery or a 9V transformer.	9V Battery	237802-316	
	EXTREME CS DPE			237803	
	EXTREME CS DPE AISI316	Dual power input box used as an integrated backup system with a 9V Lithium battery, for continued use in case of power failure.	9V Transformer	237803-316	



COMING SOON

EXTREME WM 1000

Includes mixer to adjust water temperature


QUADRAT SERIES

Electronic wall mounted faucet operated by IR sensor.

Series includes options for cold or premixed water, long spout models and various installation options.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Unique square design
- Sensor settings adjustable by remote control
- Easy installation
- Matching IR operated soap dispenser

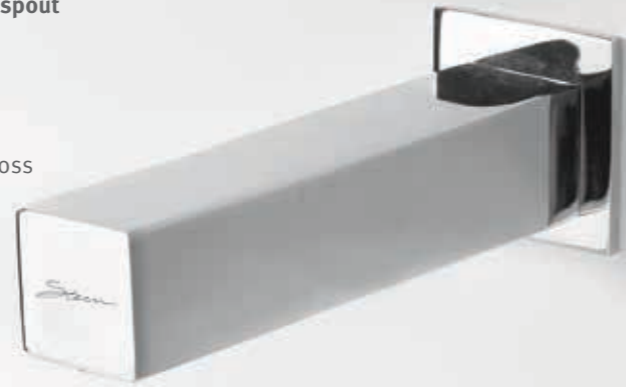

LEED RATING


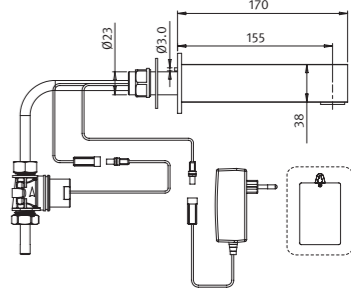












IRON FRAME AVAILABLE

WATER SAVING OPTIONS

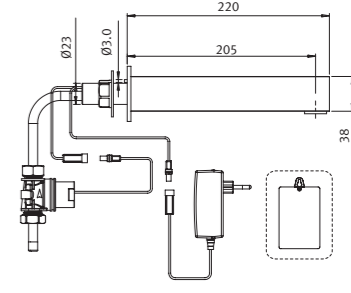6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

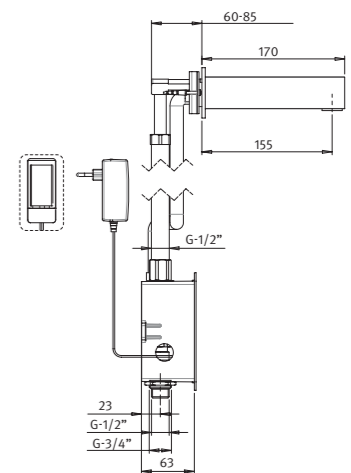

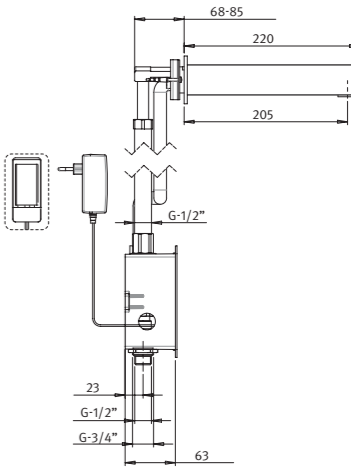PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	QUADRAT B	Concealed installation in dry walls	6 x 1.5 AA Batteries	351100	
	QUADRAT E		9V Transformer	351200	
	QUADRAT LB	Concealed installation in dry walls. Long spout 220 mm	6 x 1.5 AA Batteries	351105	
	QUADRAT LE		9V Transformer	351205	
	QUADRAT 2030 B	Concealed installation in concrete or brick walls	9V Battery	351300	
	QUADRAT 2030 E		9V Transformer	351400	
	QUADRAT 2030 LB	Concealed installation in concrete or brick walls. Long spout 220 mm	9V Battery	351305	
	QUADRAT 2030 LE		9V Transformer	351405	

NARA Q SERIES

Electronic wall mounted faucet operated by IR sensor.
For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Concealed installation, all components inside the box which makes it serviceable from the front.
- Sensor settings adjustable by remote control
- Matching flush valves for toilets and urinals
- Easy installation



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



APOLLO AL SERIES

Electronic wall mounted faucet operated by IR sensor.
For cold or premixed water.

Includes options for wave or prox operation, and accessories for brick wall installation.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Concealed installation, all components inside the box which makes it serviceable from the front
- Sensor settings adjustable by remote control
- Easy installation



LEED RATING STERN MEDICAL WAVE & PROX OPTIONS



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA Q	Concealed installation in concrete, brick walls	9V Battery	360510	
	NARA QE		9V Transformer	360500	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO ALB	Concealed installation in dry walls. Default Wave activation: Once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.	9V battery	340600	
	APOLLO ALE	Optional Prox activation: Automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.	9V Transformer	340700	

EXTENSION KIT APOLLO AL		07240060	
EXTENSION KIT FOR WAVE / PROX SENSOR (REQUIRES A SPECIAL MATCHING SENSOR)	For brick wall installations	07240061	

MEDICAL SERIES

Electronic wall mounted faucet operated by IR sensor.

Features an integrated thermostatic mixer to prevent scalding operation and temperature control.

Advantages:


- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Thermostatic control for optimum temperature
- Ideal for healthcare institutions
- Chrome plated brass body with metallic thermostatic handle
- Ideal for retrofit installations
- Sensor settings adjustable by remote control
- Internal solenoid valve
- Easy installation



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO MEDICAL FB	Exposed installation Gooseneck spout	9V Battery	314530	
	APOLLO MEDICAL FE		9V Transformer	314540	
	APOLLO MEDICAL B	Exposed installation Swivel spout	9V Battery	314500	
	APOLLO MEDICAL E		9V Transformer	314510	
	MEDICAL 1000 TE	Exposed installation Body integrated spout	9V Transformer	314600	

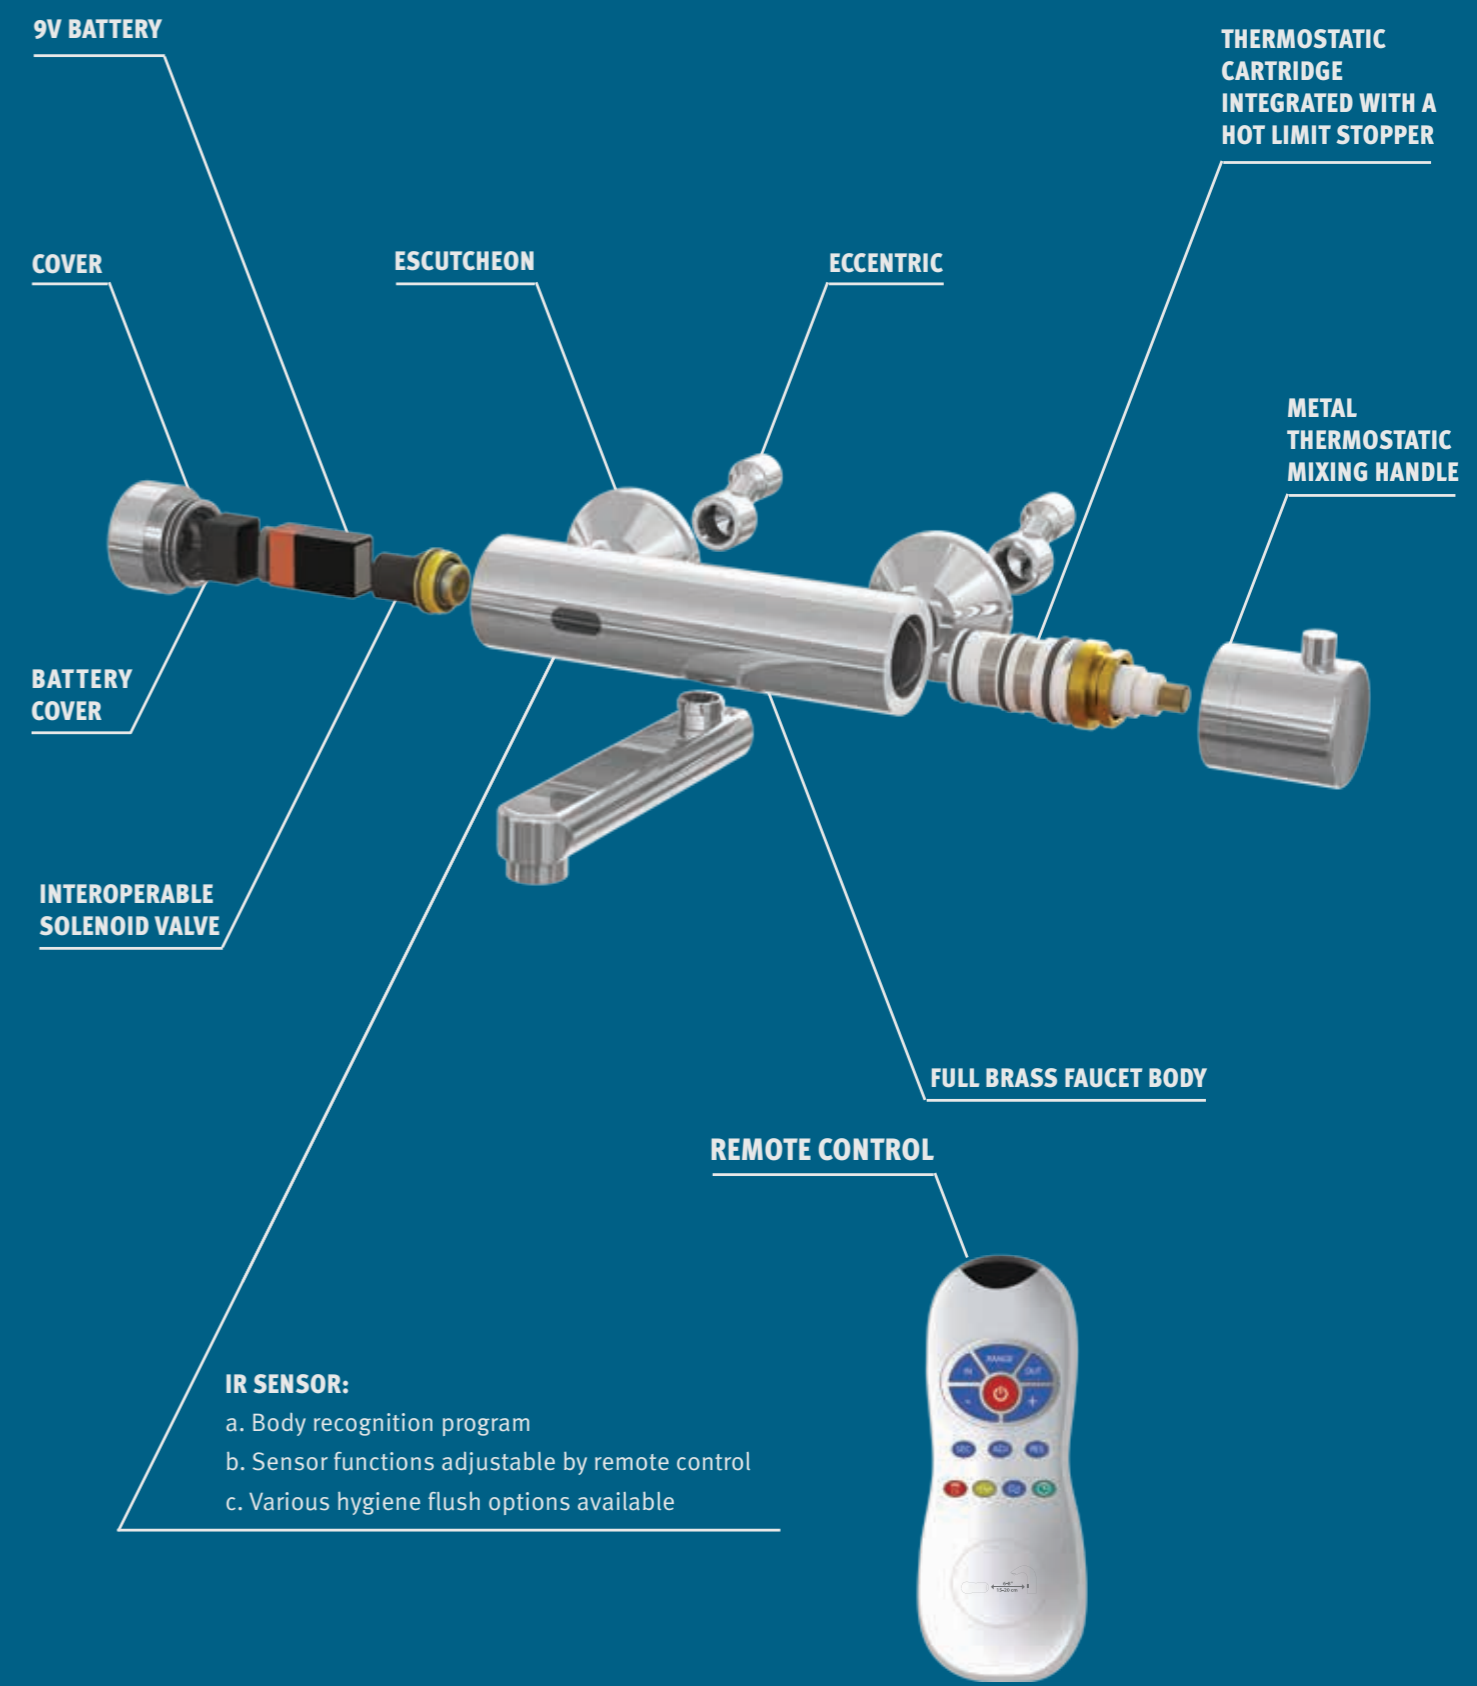

IR SENSOR:
 a. Body recognition program
 b. Sensor functions adjustable by remote control
 c. Various hygiene flush options available



APOLLO FREE SERIES

Electronic wall mounted faucet operated by IR sensor.
Powered by an internal 9V battery. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Since the sensor, solenoid and battery are inside the body, servicing is extremely easy
- Ideal for retrofit projects
- Sensor settings adjustable by remote control
- Easy installation

WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray



PROX, WAVE & TOUCH SOLUTIONS



Touch Free & Touch operated faucet kits operated by an IR sensor or a Piezo button.
To be integrated in a faucet application to deliver water with or without touch.
For cold or premixed water.

Touch Free Operation Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control

Touch Operation Advantages:

- Drastically reduces water consumption
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site



LEED RATING WAVE & PROX OPTIONS

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	APOLLO FREE	Exposed installation	9V Battery	340100	

Prox Sensors with Special Finishes

Touch free prox sensor operation now available in a wide variety of special finishes to complete the interior design of your commercial restroom.



WASHFREE 1000

Electronic wall mounted faucet operated by wave IR sensor.
For cold or premixed water. Includes option for a longer bracket.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Swivel spout
- Ideal for utility sinks
- Since the sensor, the solenoid and the battery are inside the body, servicing is extremely easy
- Ideal for retrofit installations
- Sensor settings adjustable by remote control
- Easy installation



LEED RATING WAVE & PROX OPTIONS



WATER SAVING OPTIONS		
6 LPM	1.58 GPM	SSR PCA Stream
4 LPM	1 GPM	PCA Spray
3 LPM	0.8 GPM	PCA Spray
1.89 LPM	0.5 GPM	PCA Spray
1.3 LPM	0.35 GPM	PCA Spray

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	WASHFREE 1000	Exposed installation Allows activation of the faucet once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.	9V Battery	316010	
	LONG BRACKET 200 MM			07055175	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PROX KIT FOR FAUCET	Touch free prox operation. Allows automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.	9V Battery / 9V Transformer	620200	
	WAVE KIT FOR FAUCET	Touch free wave operation. Allows activation of the faucet/unit once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 8 seconds will pass. The flow time is adjustable on site by remote control.	9V Battery / 9V Transformer	620400	
	APS KIT FOR FAUCET	Touch operation Allows activation of the faucet/unit once the users touch the designated area of the Piezo button. Water will shut off if the users touch the designated area again or once a factory set flow time of 8 seconds will pass.	9V Battery / 9V Transformer (not included)	07225008	

SOAP DISPENSERS

59-86



CSABA 61-62



CLASSIC 63-64



TRENDY 65-66



EXTREME 67-68



ELITE 69-72




GREEN 73-74



GREEN 28 75-76



TUBULAR 77-80



QUADRAT 81-82



EXTREME CS 83



MULTIFEED KITS 84-86

CSABA SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:


- Concealed IR sensor integrated into the spout
- Peristaltic pump

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (1L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations

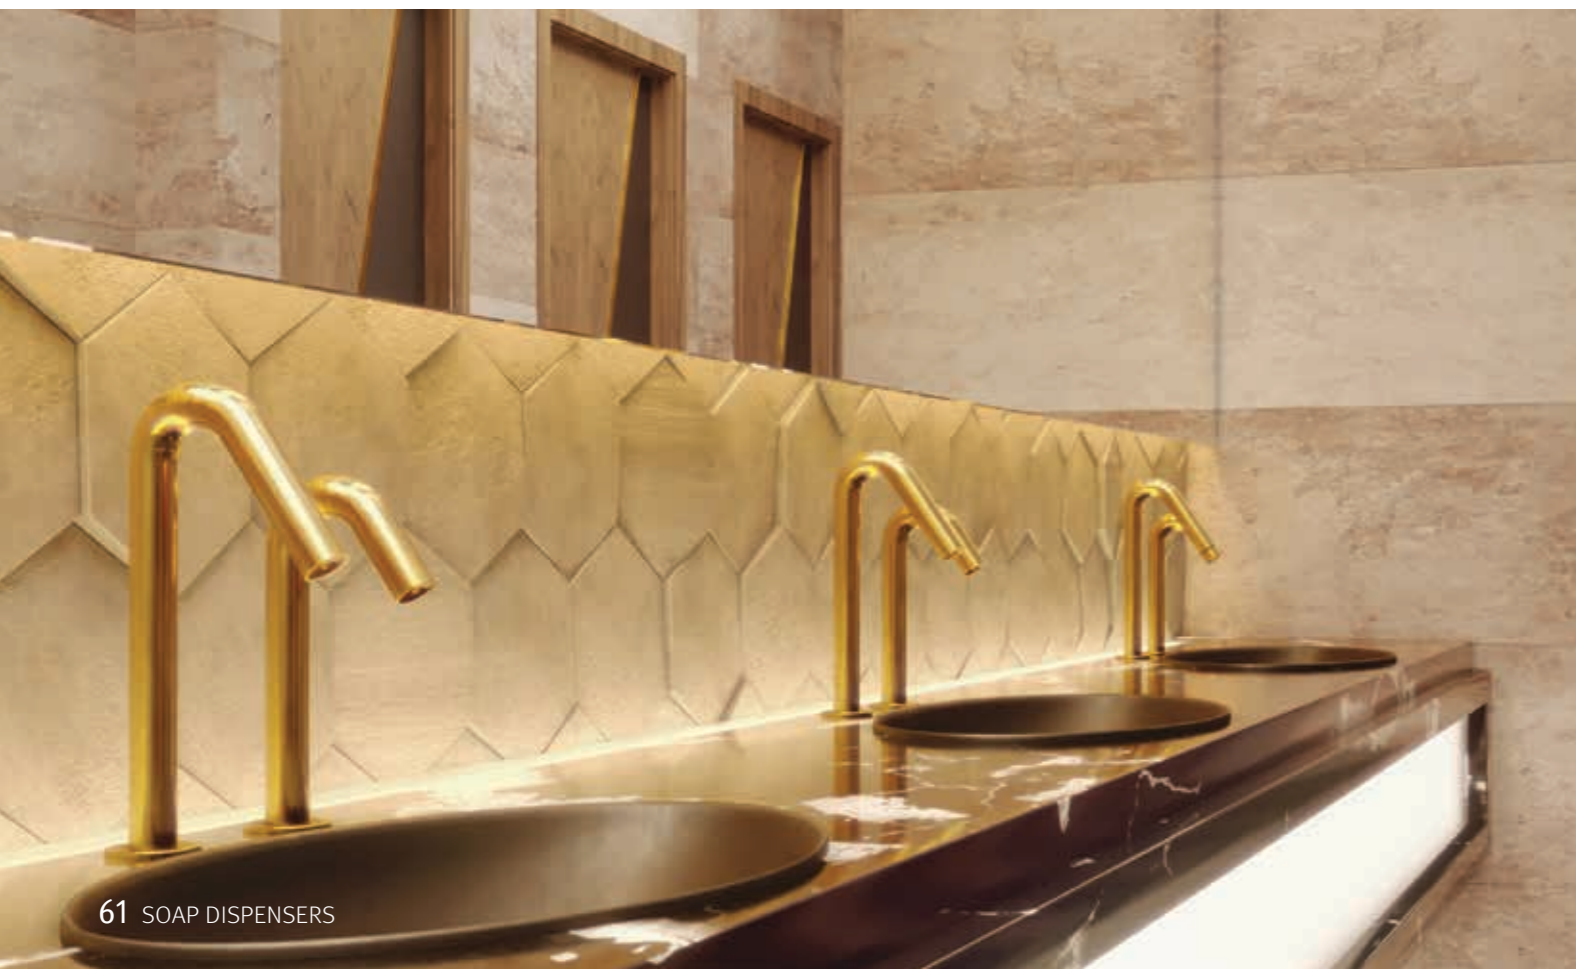

STANDARD SOAP DISPENSER VERSIONS

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CSABA SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	233110	
	CSABA SOAP DISPENSER E		12V Transformer	233100	

6-PACK SOAP DISPENSER

PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
CSABA SD B 6-PACK	Includes: Six (6) liquid soap dispenser units and one (1) remote control	Battery box for six (6) D batteries	233111	
CSABA SD E 6-PACK		12V Transformer	233101	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS

PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF CSABA SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292288	
CSABA SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	233102	

CLASSIC SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (1L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
CLASSIC SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	292401	
CLASSIC SD E 6-PACK		12V Transformer	292411	
CLASSIC FOAM E 6-PACK		12V Transformer	292301	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF CLASSIC SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292177	
MF CLASSIC FOAM DISPENSER	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292207	
CLASSIC SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	292416	

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	CLASSIC SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	292400	
	CLASSIC SOAP DISPENSER E		12V Transformer	292410	
	CLASSIC FOAM E	Delivers foam soap	12V Transformer	292300	



TRENDY SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- Tall version for counter top sink
- Anti-rotation pin
- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (1L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	239910	
	TRENDY SOAP DISPENSER E		12V Transformer	239900	
	TRENDY FOAM E	Delivers foam soap	12V Transformer	239930	

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TRENDY SOAP DISPENSER PLUS B	Delivers liquid soap Tall version: 12" (304 mm) body	Battery box for six (6) D batteries	239912	
	TRENDY SOAP DISPENSER PLUS E		12V Transformer	239902	

6-PACK LIQUID SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
TRENDY SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	239911	
TRENDY SD E 6-PACK		12V Transformer	239901	
TRENDY FOAM E 6-PACK	12V Transformer	239931		
TRENDY SD PLUS B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	239913	
TRENDY SD PLUS E 6-PACK		12V Transformer	239903	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF TRENDY SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292073	
MF TRENDY FOAM DISPENSER	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292183	
MF TRENDY SD PLUS	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292099	
TRENDY SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	239916	

EXTREME SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- Tall version for counter top sink
- Anti-rotation pin
- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (1L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	237920	
	EXTREME SOAP DISPENSER E		12V Transformer	237900	
	EXTREME SOAP DISPENSER PLUS B	Delivers liquid soap	Battery box for six (6) D batteries	237922	
	EXTREME SOAP DISPENSER PLUS E	Tall version: 12" (304 mm) body	12V Transformer	237905	

6-PACK LIQUID SOAP DISPENSER VERSIONS

PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
EXTREME SD B 6-PACK	Includes: Six (6) soap dispenser units and one (1) remote control	Battery box for six (6) DD batteries	237921	
EXTREME SD E 6-PACK		12V Transformer	237901	
EXTREME SD PLUS B 6-PACK	Includes: Six (6) soap dispenser units and one (1) remote control	Battery box for six (6) DD batteries	237923	
EXTREME SD PLUS E 6-PACK		12V Transformer	237906	



1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF EXTREME SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292056	
MF EXTREME SD PLUS	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292095	
EXTREME SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	237916	

ELITE SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- Tall version for counter top sink
- Anti-rotation pin
- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (1L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	236110	
	ELITE SOAP DISPENSER E		12V Transformer	236100	
	ELITE FOAM E	Delivers foam soap	12V Transformer	236120	

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE SOAP DISPENSER PLUS B	Delivers liquid soap	Battery box for six (6) D batteries	236107	
	ELITE SOAP DISPENSER PLUS E		Tall version: 12" (304 mm) body	12V Transformer	

6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
ELITE SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	236111	
ELITE SD E 6-PACK		12V Transformer	236101	
ELITE FOAM E 6-PACK		12V Transformer	236121	
ELITE SD PLUS B 6-PACK		Battery box for six (6) D batteries	236108	
ELITE SD PLUS E 6-PACK		12V Transformer	236106	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF ELITE SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292077	
MF ELITE FOAM DISPENSER	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292205	
MF ELITE SD PLUS	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292093	
ELITE SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	236216	

ELITE SOAP DISPENSER AISI316

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- Tall version for counter top sink
- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Alternative 4.4" (112mm) long spout
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE SOAP DISPENSER B AISI316	Delivers liquid soap	Battery box for six (6) D batteries	236113	
	ELITE SOAP DISPENSER E AISI316	Stainless Steel AISI 316 body	12V Transformer	236103	
	ELITE FOAM E AISI316	Delivers foam soap	12V Transformer	236122	
		Stainless Steel AISI 316 body			

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELITE SOAP DISPENSER PLUS B AISI316	Delivers liquid soap	Battery box for six (6) D batteries	236109	
	ELITE SOAP DISPENSER PLUS E AISI316	Tall version: 12" (304 mm) body Stainless Steel AISI 316 body	12V Transformer	236104	

6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
ELITE SD 6-PACK B AISI316	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	236114	
ELITE SD 6-PACK E AISI316		12V Transformer	236117	
ELITE FOAM 6-PACK E AISI316		12V Transformer	236123	
ELITE SD PLUS B AISI 316		Battery box for six (6) D batteries	236108	
ELITE SD PLUS E AISI 316		12V Transformer	236106	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF ELITE SOAP DISPENSER AISI316	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Stainless Steel AISI 316 body	12V Transformer	07292239	
MF ELITE FOAM DISPENSER AISI316	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Stainless Steel AISI 316 body	12V Transformer	07292240	
MF ELITE SD PLUS AISI316	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Stainless Steel AISI 316 body	12V Transformer	07292241	
ELITE SD 1.6 E AISI316	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser Stainless Steel AISI 316 body	12V Transformer	236126	

GREEN SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings


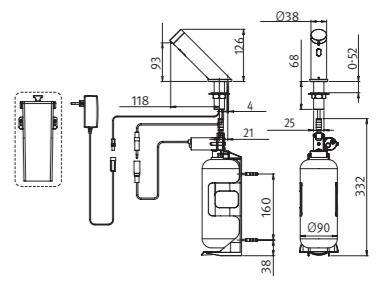

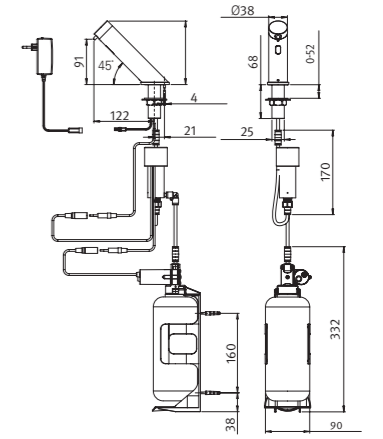
Options:


- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control



Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	GREEN SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	225845	
	GREEN SOAP DISPENSER E	Includes a brass base for abuse protection in high traffic locations	12V Transformer	225840	
	GREEN FOAM E	Delivers foam soap Includes a brass base for abuse protection in high traffic locations	12V Transformer	225842	

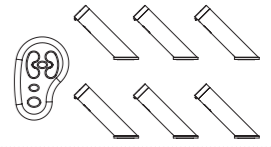6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
GREEN SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	225846	
GREEN SD E 6-PACK		12V Transformer	225841	
GREEN FOAM E 6-PACK		12V Transformer	225843	

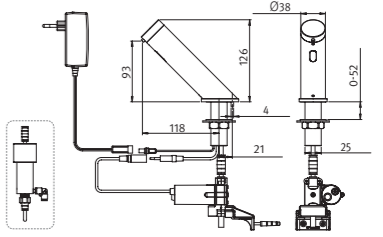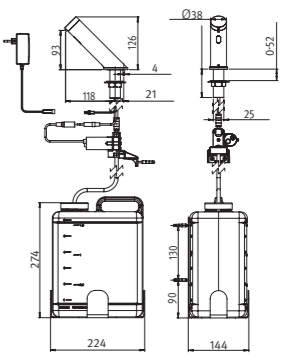1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF GREEN SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292062	
MF GREEN FOAM DISPENSER	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292228	
GREEN SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	225816	

GREEN 28 SOAP DISPENSER

Deck-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	GREEN 28 SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	352900	
	GREEN 28 SOAP DISPENSER E	Includes a brass base for abuse protection in high traffic locations	12V Transformer	352910	
	GREEN 28 FOAM E	Delivers foam soap Includes a brass base for abuse protection in high traffic locations	12V Transformer	352920	

6-PACK LIQUID SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
GREEN 28 SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	352901	
GREEN 28 SD E 6-PACK		12V Transformer	352911	
GREEN 28 FOAM E 6-PACK		12V Transformer	352921	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF GREEN 28 SOAP DISPENSER	Delivers liquid soap Deck mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292155	
MF GREEN 28 FOAM DISPENSER	Delivers foam soap Deck mounted touch free electronic foam dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292206	
GREEN 28 SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	352916	

TUBULAR SOAP DISPENSER

Wall-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Chrome plated brass body
- Peristaltic pump
- Adjustable settings
- IR sensor in dispenser spout


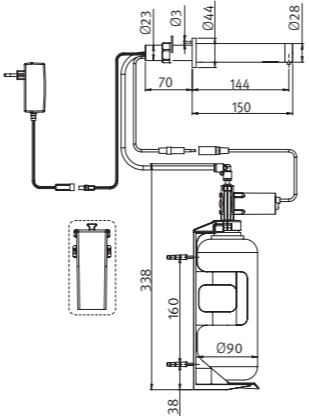

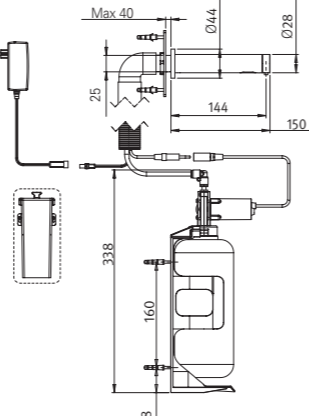
Options:


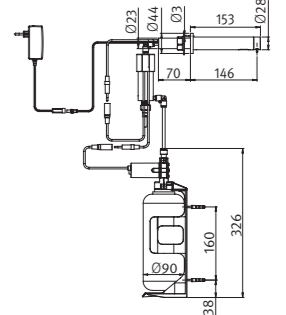
- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control


Advantages:





- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR SOAP DISPENSER B	Delivers liquid soap Optional version: 120mm	Battery box for six (6) D batteries	350920	
	TUBULAR SOAP DISPENSER E	Chrome-plated 100% brass spout	12V Transformer	350925	
	TUBULAR SOAP DISPENSER 2030 B	Delivers liquid soap Concealed installation	Battery box for six (6) D batteries	350922	
	TUBULAR SOAP DISPENSER 2030 E	Optional version: 120mm Chrome-plated 100% brass spout	12V Transformer	350927	

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR FOAM E	Delivers foam soap Optional version: 120mm	12V Transformer	350980	

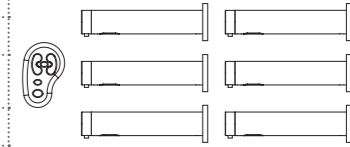6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
TUBULAR SD B 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	350921	
TUBULAR SD E 6-PACK		12V Transformer	350926	
TUBULAR 2030 SD B 6-PACK		Battery box for six (6) D batteries	350923	
TUBULAR 2030 SD E 6-PACK		12V Transformer	350928	
TUBULAR FOAM E 6-PACK		12V Transformer	350981	

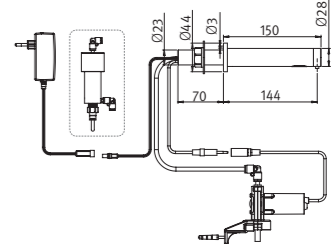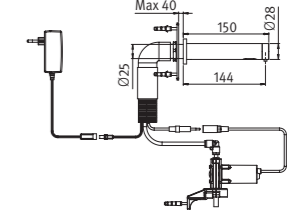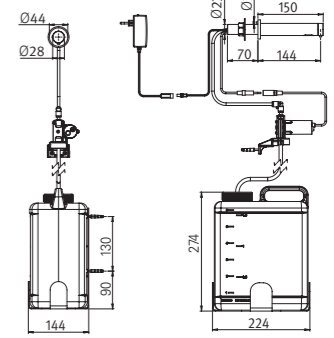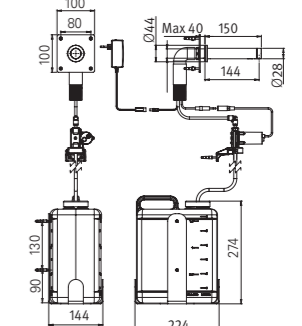1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF TUBULAR SOAP DISPENSER	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292076	
MF TUBULAR FOAM DISPENSER	Delivers foam soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292186	
MF TUBULAR SOAP DISPENSER 2030	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292081	
TUBULAR SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser Optional version: 120mm	12V Transformer	350116	
TUBULAR 2030 SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser Optional version: 120mm	12V Transformer	350816	

TUBULAR SOAP DISPENSER AISI316

Wall-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:


- Stainless Steel AISI316 product body
- 5-7/8" (150mm) long
- IR sensor in dispenser spout
- Peristaltic pump
- Adjustable settings

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations

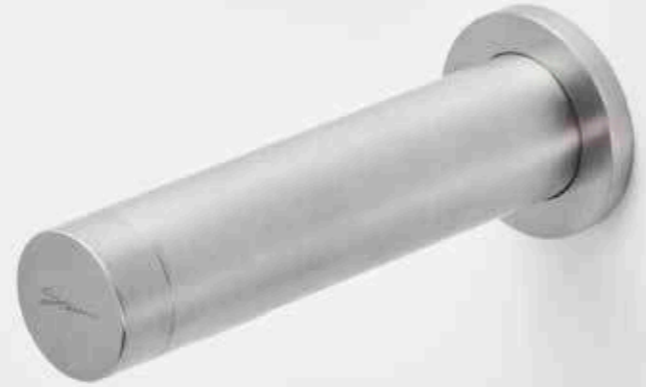

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR SD B AISI316	Delivers liquid soap	Battery box for six (6) D batteries	350919	
	TUBULAR SD E AISI316		12V Transformer	350924	
	TUBULAR SD 2030B AISI316	Delivers liquid soap Concealed installation	Battery box for six (6) D batteries	350918	
	TUBULAR SD 2030E AISI316		12V Transformer	350917	

STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR FOAM E AISI316	Delivers foam soap	12V Transformer	350982	

6-PACK SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
TUBULAR SD B AISI316 6-PACK	Includes: Six (6) soap/foam dispenser units and one (1) remote control	Battery box for six (6) D batteries	350991	
TUBULAR SD E AISI316 6-PACK		12V Transformer	350984	
TUBULAR SD 2030B AISI316 6-PACK		Battery box for six (6) D batteries	350992	
TUBULAR SD 2030E AISI316 6-PACK		12V Transformer	350933	
TUBULAR FOAM E AISI316 6-PACK		12V Transformer	350983	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF TUBULAR SOAP DISPENSER AISI316	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292221	
MF TUBULAR FOAM DISPENSER AISI316	Delivers foam soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292231	
MF TUBULAR SOAP DISPENSER 2030 AISI316	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation Optional version: 120mm	12V Transformer	07292222	
TUBULAR SD 1.6 E AISI316	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser Optional version: 120mm	12V Transformer	350932	
TUBULAR 2030 SD 1.6 E AISI316	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser Optional version: 120mm	12V Transformer	350916	

QUADRAT SOAP DISPENSER

Wall-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- 100% heavy-duty one piece brass body
- IR sensor in dispenser spout
- Peristaltic pump
- Adjustable settings

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption.
 - Recommended soap viscosity 100-3800 cPs.
 - Recommended foam soap viscosity up to 100 cPs
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSIONS					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	QUADRAT SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	351910	
	QUADRAT SOAP DISPENSER E		12V Transformer	351900	
	QUADRAT SOAP DISPENSER 2030 B	Delivers liquid soap Concealed installation	Battery box for six (6) D batteries	351920	
	QUADRAT SOAP DISPENSER 2030 E		12V Transformer	351930	

6-PACK LIQUID SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
QUADRAT SD B 6-PACK	Includes: Six (6) soap dispenser units and one (1) remote control	Battery box for six (6) D batteries	351911	
QUADRAT SD E 6-PACK		12V Transformer	351901	
QUADRAT SD 2030 B 6-PACK		Battery box for six (6) D batteries	351921	
QUADRAT SD 2030 E 6-PACK		12V Transformer	351931	

1.6 GALLON (6L) SOAP DISPENSER VERSIONS				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF QUADRAT SOAP DISPENSER	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292078	
MF QUADRAT SOAP DISPENSER 2030	Delivers liquid soap Wall mounted touch free electronic soap dispenser to be used with Stern's Multifeed kits for multiple soap dispensers installation	12V Transformer	07292094	
QUADRAT SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	351916	
QUADRAT 2030 SD 1.6 E	Delivers liquid soap 1.6 gallon (6L) tank kit for an individual soap dispenser	12V Transformer	351316	

EXTREME CS SOAP DISPENSER

Wall-mounted touch-free electronic soap dispenser for non-proprietary soap

Features:

- Concealed sensor integrated into the spout
- IR sensor
- Peristaltic pump
- Stainless steel AISI316 spout available

Options:

- 0.26 US gallon (1L) soap bottle
- 1.6 US gallon (6L) soap tank
- Multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Matching IR operated faucet
- Remote control

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Clog and backflow prevention - with designated peristaltic pump
- Accurate soap dosage - adjustable by remote control
- Maximized savings - can be used with any non-proprietary soap
- Easy to install and refill
- Highly durable - for heavy traffic locations



STANDARD SOAP DISPENSER VERSION					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	EXTREME CS SOAP DISPENSER B	Delivers liquid soap	Battery box for six (6) D batteries	237891	
	EXTREME CS SOAP DISPENSER E	Brass spout	12V Transformer	237890	
	EXTREME CS SOAP DISPENSER B AISI316	Delivers liquid soap	Battery box for six (6) D batteries	237891-316	
	EXTREME CS SOAP DISPENSER E AISI316	Stainless Steel AISI 316	12V Transformer	237890-316	

6-PACK LIQUID SOAP DISPENSER				
PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
EXTREME CS SD B 6-PACK	Includes: Six (6) soap dispenser units and one (1) remote control	Battery box for six (6) D batteries	237894	
EXTREME CS SD E 6-PACK		12V Transformer	237893	
EXTREME CS SD B AISI316 6-PACK		Battery box for six (6) D batteries	237898	
EXTREME CS SD B AISI316 6-PACK		12V Transformer	237899	

MULTIFEED KITS



Multiple soap dispensers installation kit

Features:

- Allows multiple soap dispensers installation (up to six (6) dispensers) with a single 1.6 US gallon (6L) tank
- Stainless Steel tank support


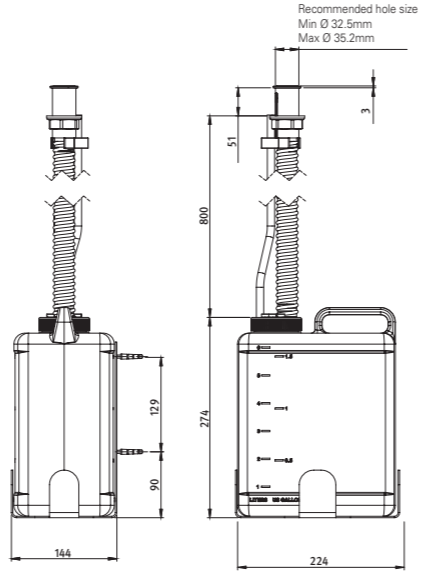

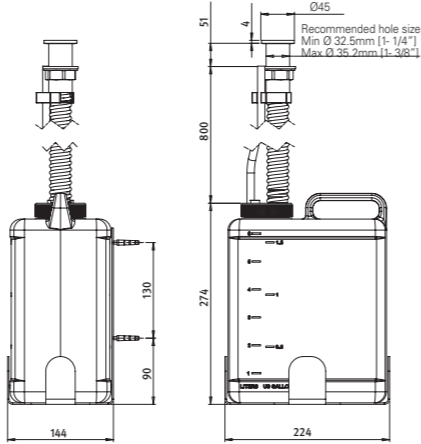

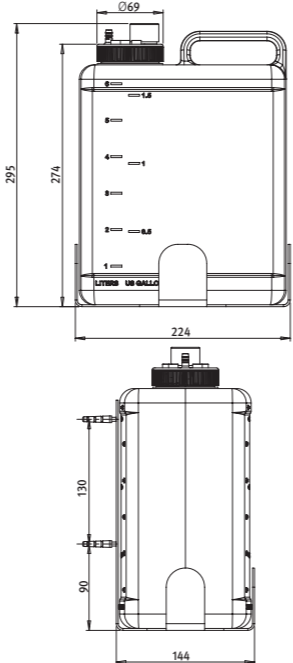
Options:


- Anti-theft top filling mechanism for easy refill from the counter top
- Top filling mechanism with anti-theft protection
- LED light indicator of soap level
- Under-the-deck filling mechanism

Advantages:

- Drastically reduces soap consumption
- Cross contamination protection - no physical contact
- Maximized savings - can be used with any non-proprietary soap
- Easy installation
- Fast and simple refill with optional LED indication of soap level
- Highly durable - with optional vandal-resistant top-filling mechanism



PRODUCT	MODEL FEATURES	CODE NUMBER	DRAWING
 <p>TOP-FILLING MULTIFEED KIT WITH SOAP LEVEL INDICATOR</p>	<p>Vandal-resistant chrome-plated top-filling brass mechanism. LED soap level indicator. Power splitter for connection to transformer powered MF soap dispenser.</p>	07220152	
 <p>TOP-FILLING MULTIFEED KIT</p>	<p>Vandal-resistant chrome-plated top-filling brass mechanism. Available for transformer powered MF soap dispensers.</p>	07220090	
 <p>UNDER THE DECK MULTIFEED KIT</p>	<p>For multiple soap dispensers installation without connecting a top-filling mechanism through the deck. Available for transformer powered MF soap dispensers. Top-fill unit not included in this model.</p>	07220096	

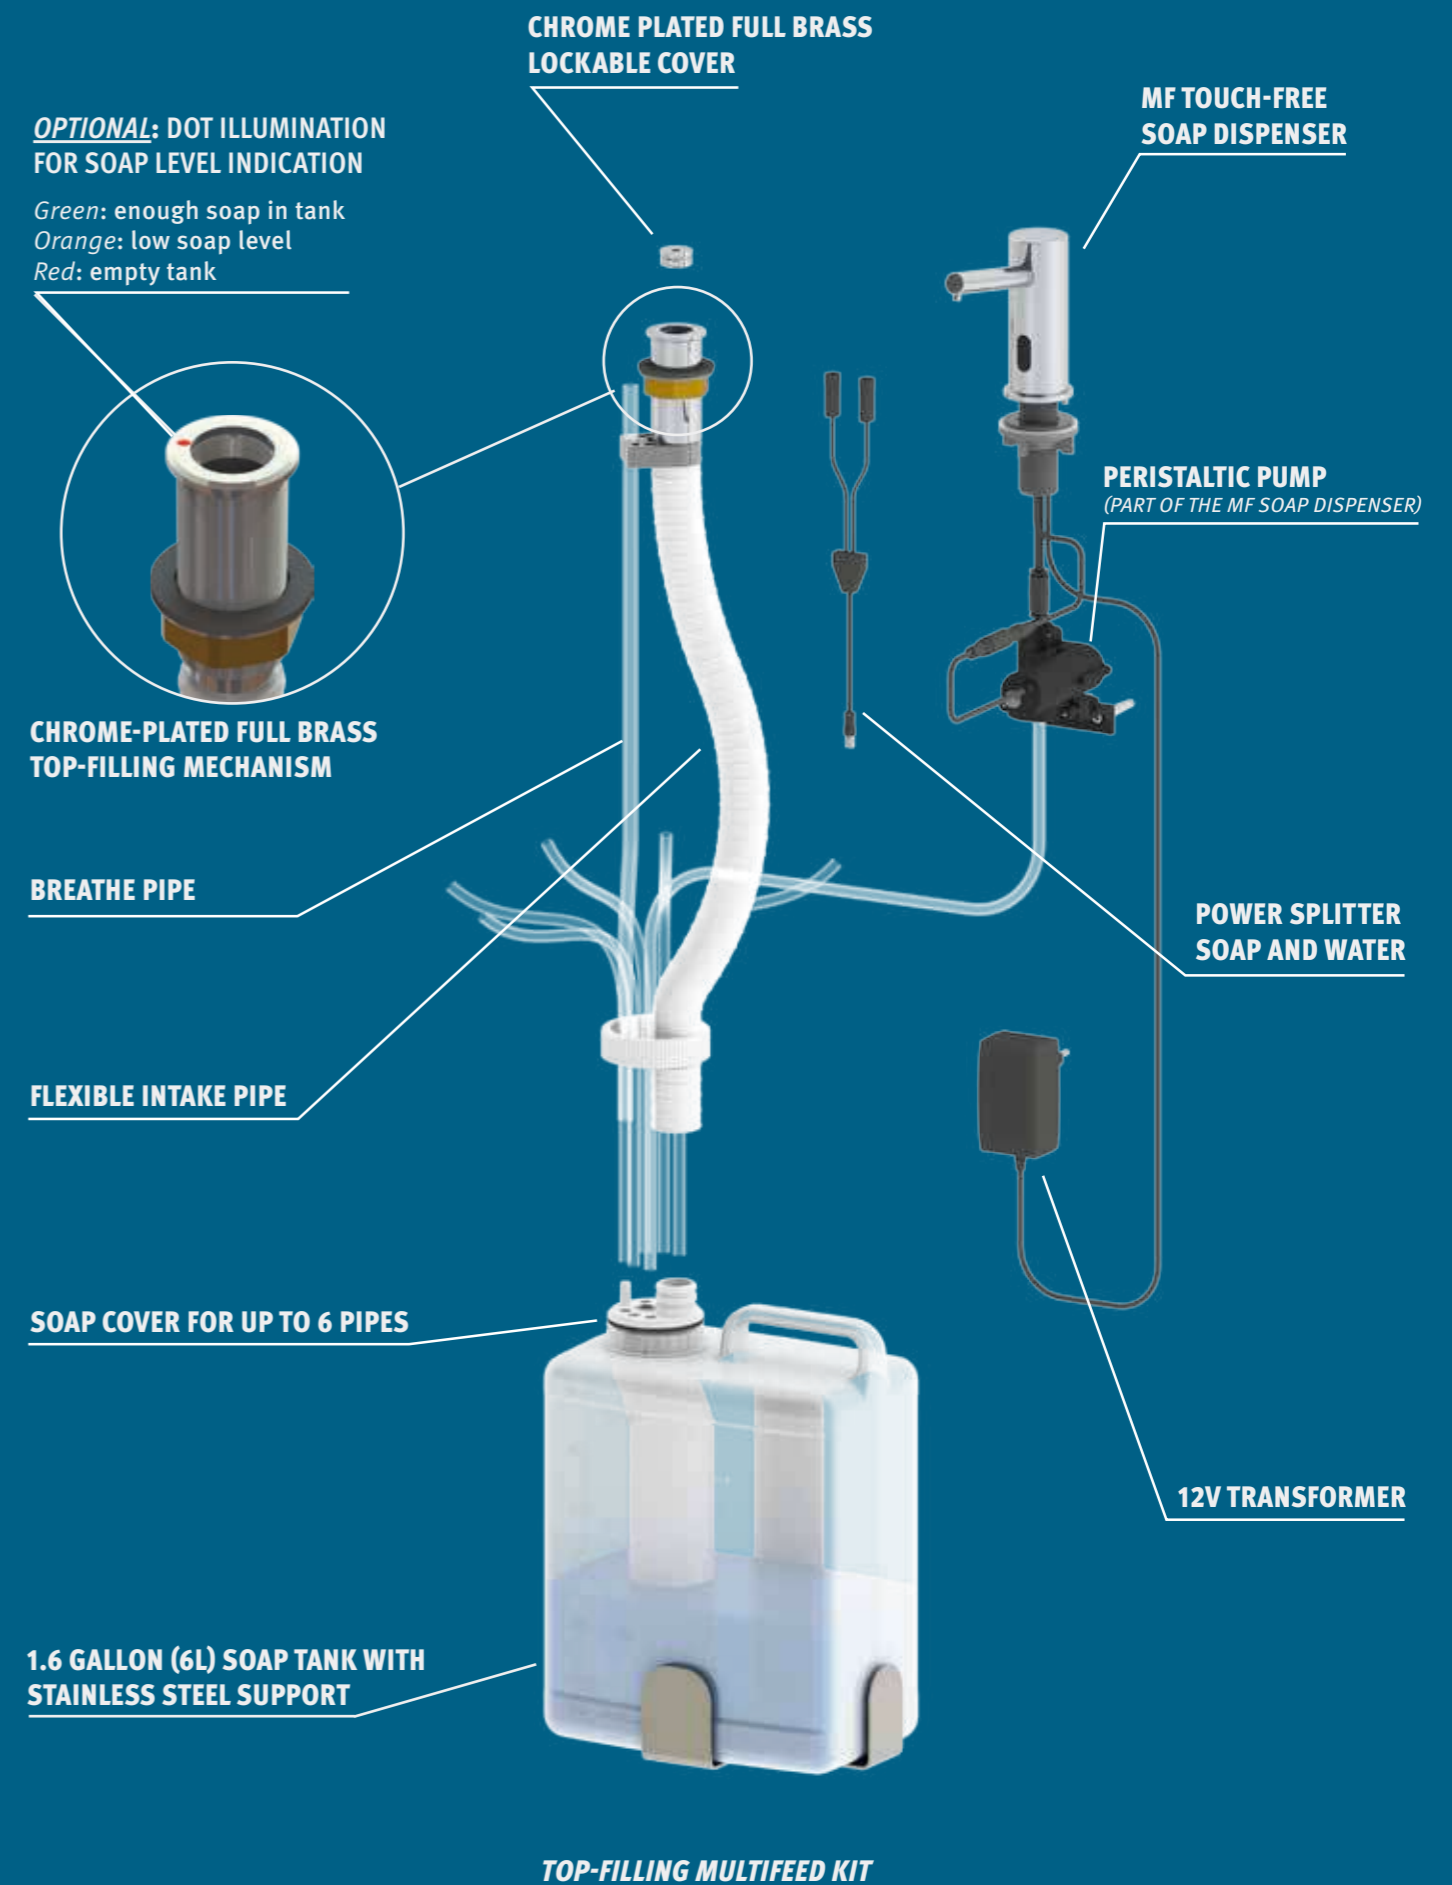

HAND DRYERS & BEHIND THE MIRROR

87-96



EVER HD **89**



TUBULAR HD **90**



SWAR **91**
SOAP WATER AIR
REVOLUTION



SWA HI-SPEED **92**
MODULE



SWA **93-94**
SOAP WATER AIR
MODULE



BEHIND MIRROR **95**
FAUCET



BEHIND MIRROR **96**
SOAP DISPENSER


EVER HD

Electronic deck mounted hand dryer operated by IR sensor.

Touch free electronic hand dryer for deck mounted installations. Powered by 110V-120/220V-240VAC. Hand dryer will automatically shut off after being used for more than 60 seconds. Sensor settings can be customized by remote control.

Advantages:

- Installed above basin preventing hand wash drips to floors and counters
- HEPA filter for added hygienic properties
- Full brass body or stainless steel 316 material
- Variety of colors and special finishes available
- Matching touch free faucet and soap dispenser
- Long lasting, durable and vandal resistant
- Air flow intensity adjustable by external button
- Adjustability with remote control: security time, detection range, delay out
- On/Off function to perform cleaning

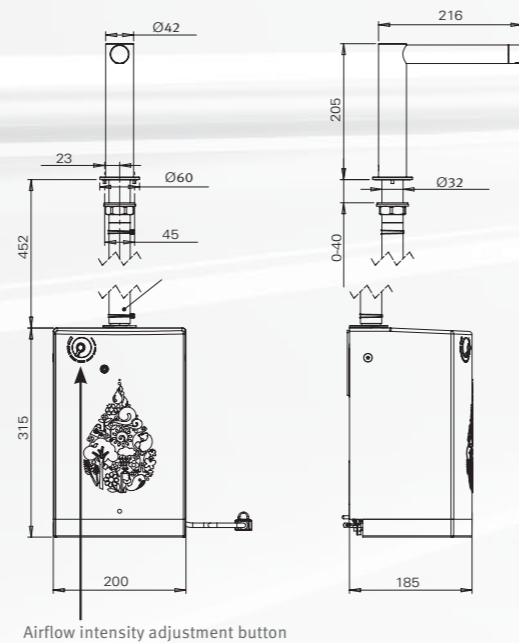

MODEL	CODE	POWER
EVER HD	230510	110V-120/220V-240VAC



Ref: 230510


TUBULAR HD

Electronic wall mounted hand dryer operated by IR sensor.


Touch free electronic hand dryer for wall mounted installations. Powered by 110V-120/220V-240VAC. Hand dryer will automatically shut off after being used for more than 60 seconds. Sensor settings can be customized by remote control.

Advantages:

- Installed above basin preventing hand wash drips to floors and counters
- HEPA filter for added hygienic properties
- Full brass body or stainless steel 316 material
- Variety of colors and special finishes available
- Matching touch free faucet and soap dispenser
- Long lasting, durable and vandal resistant
- Air flow intensity adjustable by external button
- Adjustability with remote control: security time, detection range, delay out
- On/Off function to perform cleaning

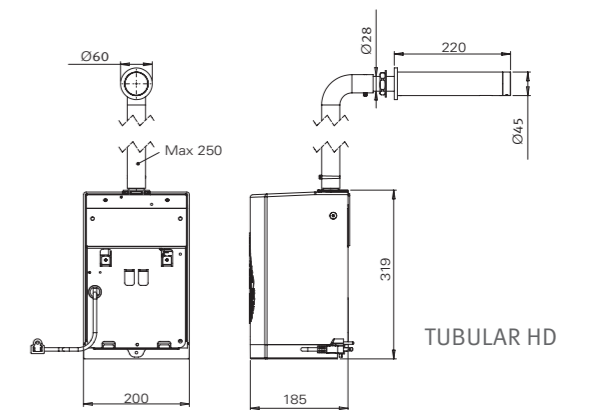

MODEL	CODE	POWER	ADDITIONAL FEATURES
TUBULAR HD	350030	110V-120/ 220V-240VAC	Concealed installation in dry walls
TUBULAR HD AISI316	350040		Concealed installation in dry walls as well as concrete and brick walls
TUBULAR DP HD	350020	110V-120/ 220V-240VAC	Concealed installation in dry walls as well as concrete and brick walls
TUBULAR DP HD AISI316	350010		Concealed installation in dry walls as well as concrete and brick walls

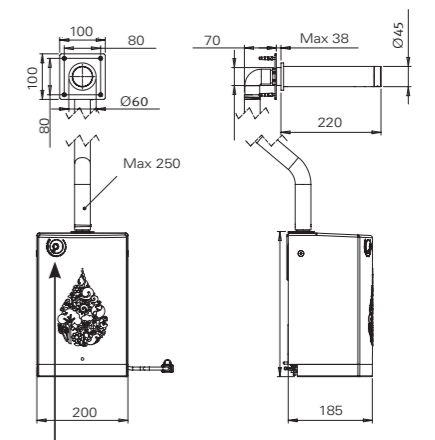

Airflow intensity adjustment button

TUBULAR DP HD



SWAR

Complete sanitary cabinet with a lockable mirror.

Includes high speed hand dryer, mixing valve, touch free faucet, touch free soap dispenser and LED pictograms for intuitive user guidance and decoration.

Delivered with remote controls to adjust soap dosage, select light color or sequence and customize the faucet settings.

- Eliminates messy, slippery floors and hand drying queues
- Reduces the amount of labor for commercial facilities maintenance
- Electrical connection supplied according to your region/needs.

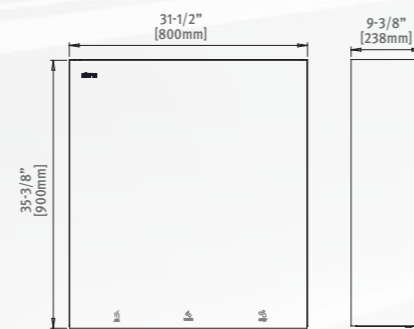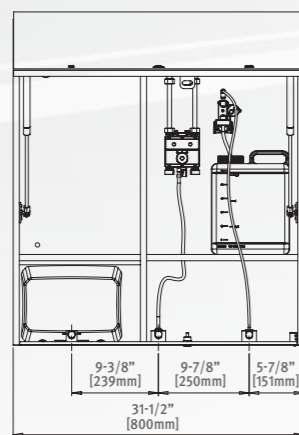

Ref:
 SWAR US: 280460-US
 SWAR UK: 280460-UK
 SWAR EU: 280460-EU
 SWA Hardwired: 280460-HW

12V transformer


SWA HI-SPEED MODULE

Complete system including high speed hand dryer, thermostatic mixing valve, touch free faucet, liquid soap dispenser and optional lamp soap level indicator.


- Ready to be integrated behind the mirror for a clear, minimalistic design
- Eliminates messy, slippery floors and hand drying queues
- Reduces the amount of labor for commercial facilities maintenance
- Easy installation with a stainless steel frame to be fixed to the wall
- Ideal touch free soap-water-air cycle
- Helps preventing cross contamination
- Reduces water and soap consumption
- To be used with non-proprietary soap
- Drying time: less than 15 seconds



Complete system including high speed hand dryer (1), thermostatic mixing valve (2), touch free faucet (3) liquid soap dispenser (4) and optional lamp soap level indicator (5)

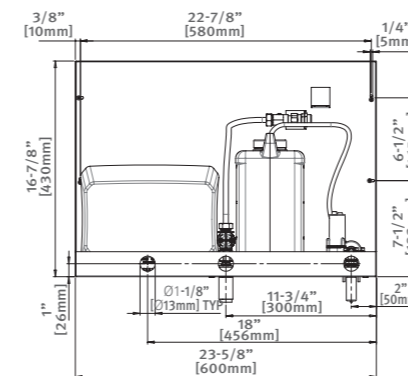

Modular system including high speed hand dryer (1), touch free faucet (2) and liquid soap dispenser (3) and optional lamp soap level indicator (5)

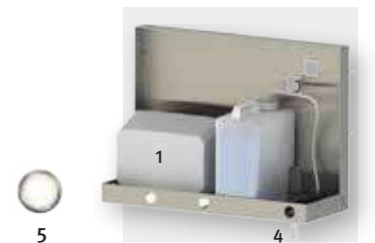

Modular system including high speed hand dryer (1) and liquid soap dispenser (4) and optional lamp soap level indicator (5)

Ref: 280410
 12V transformer

SWA MODULE

Electronic wall mounted system for integration behind the mirror


- Ready to be integrated behind the mirror for a clear, minimalistic design
- Eliminates messy, slippery floors and hand drying queues
- Reduces the amount of labor for commercial facilities maintenance
- Easy installation with a stainless steel frame to be fixed to the wall
- Ideal touch free soap-water-air cycle
- Helps preventing cross contamination
- Reduces water and soap consumption
- To be used with non-proprietary soap




TAILORED TO YOUR NEEDS:

The SWA Module's complete version includes a touch free soap or foam dispenser, faucet, thermostatic mixing valve and hand dryer.

Each component can be delivered individually and any combination is possible.






Complete system including hand dryer (1), thermostatic mixing valve (2), touch free faucet (3) and liquid soap dispenser (4)




Modular system including thermostatic mixing valve (2), touch free faucet (3) and liquid soap dispenser (4)



Modular system including hand dryer (1), touch free faucet (3) and liquid soap dispenser (4)

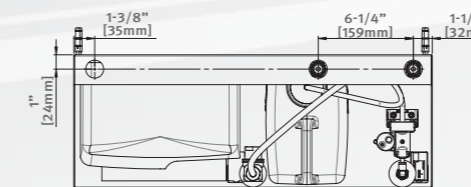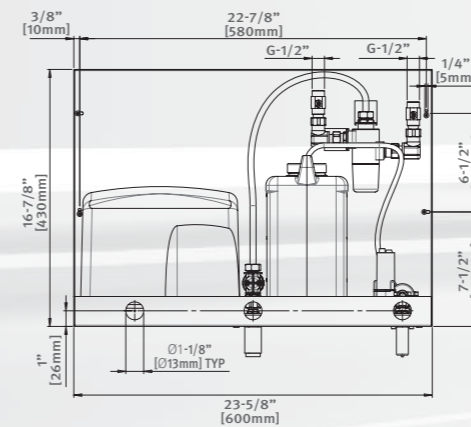

Modular system including touch free faucet (3) and liquid soap dispenser (4)



Modular system including hand dryer (1) and liquid soap dispenser (4)

Ref: 280400
12V transformer

* System including paper dispenser instead of hand dryer also available upon request

BTM FAUCET


Electronic wall mounted faucet for integration behind the mirror

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation behind the mirror
- Matching IR operated soap dispenser



Ref: 280300
9V transformer

Ref: 280310
Battery box for 6 x D batteries

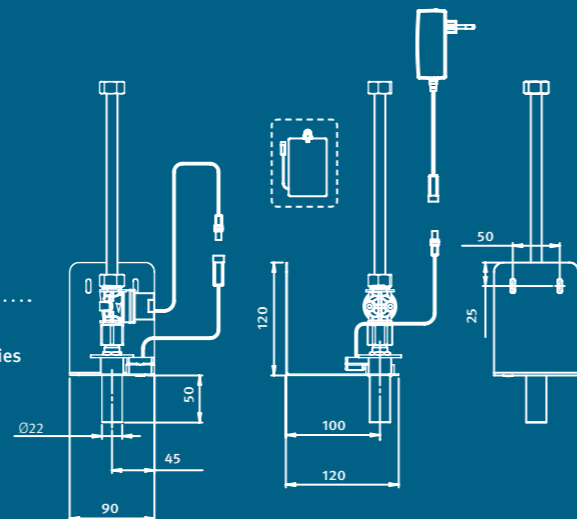

BTM SOAP DISPENSER



Touch free electronic soap dispenser for integration behind the mirror

- Drastically reduces soap consumption
- No physical contact. Helps to protect users against cross contamination
- Peristaltic pump. The soap is driven inside the soap tube without contact with the pump, preventing contamination and back flow
- Accurate soap dosage
- To be used with non-proprietary soap for maximum savings
- Easy to install and refill
- Matching IR operated faucet

BTM SOAP DISPENSER VERSIONS

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	BEHIND MIRROR SD E	Delivers liquid soap	Battery box for six (6) D batteries	280200	
	BEHIND MIRROR SD B		12V Transformer	280210	
	BTM FOAM	Delivers foam soap	12V Transformer	280250	

BTM MF SOAP DISPENSER VERSIONS

PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
MF BEHIND MIRROR SD	Soap dispenser to be used with Stern's Multifeed kits for multiple refill. Delivers liquid soap.	12V Transformer	07292223	
MF BEHIND MIRROR FOAM	Soap foam dispenser to be used with Stern's Multifeed kits for multiple refill. Delivers foam soap	12V Transformer	07292270	
MULTIFEED KIT	This version allows multiple soap dispenser refill (up to 6 dispensers) with a single 1.6 US Gallons (6 liters) tank.		07220096	



NEW BTM PAPER TOWEL HOLDER

Paper towel holder. Stainless steel body. For integration behind the mirror as part of the SWA electronic wall mounted system. Easy installation. Space saving and functional solution that accommodates standard paper towels from your favorite brands (paper towels not included).

REF 0330018

SHOWERS

97-112



SHOWER HEADS **99**



SHOWER PANELS **100-104**



NEPTUNE 1042T **105**



PERFECT TIME 1042T **106**



NEPTUNE MEDICAL **107**



TOUCH SH 1000T **108**



THERMIX SH 1000T **108**



NEPTUNE 1032 **109**



PERFECT TIME **109**
SH 1032



PROX, WAVE & TOUCH **110**



FOOT WASHFREE **111-112**

SHOWER HEADS

Solid brass shower heads

Advantages:

- Drastically reduces water consumption
- Built in filter
- Silicon nozzels in spray disk for easy cleaning



WATER SAVING OPTIONS		
9 LPM	2.38 GPM	FLOW RESTRICTOR
7 LPM	1.85 GPM	FLOW RESTRICTOR
6 LPM	1.59 GPM	FLOW RESTRICTOR
5 LPM	1.06 GPM	FLOW RESTRICTOR



SH 3000



PICTURE	PRODUCT NAME	MODEL FEATURES	CODE NUMBER	DRAWING
	SH 9000	Rear inlet	600400	
	SLEEVE KIT FOR SH 9000	Accessory For high security installations	07240046	
	SH 9020	Bottom inlet	600420	
	SH 3000	Top inlet	600100	

NEPTUNE

SHOWER PANELS

Electronic Shower Panel

Operated by IR sensor. Series includes options for wave or prox operation, cold or premixed water as well as thermostatic controlled hot and cold water.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Thermostatic control for optimum temperature and scalding prevention
- Aluminum panel with Epoxy coating for high corrosion resistance
- Retrofit solution for old shower systems
Conceals damages and prevents the need of replacing tiles
- Provided shower head includes built in silicone nozzels for easy cleaning
- Default top inlet installation with options for rear inlet installation
- Sensor settings adjustable by remote control

WATER SAVING OPTIONS		
9 LPM	2.38 GPM	FLOW RESTRICTOR
7 LPM	1.85 GPM	FLOW RESTRICTOR
6 LPM	1.59 GPM	FLOW RESTRICTOR
5 LPM	1.06 GPM	FLOW RESTRICTOR



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NEPTUNE SHOWER PANEL B	Exposed installation Default Wave Operation: Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control.	6 x 1.5 AA Batteries	601410	
	NEPTUNE SHOWER PANEL E	Optional Prox Operation: Allows automatic activation when the users are within the sensor range, and stops when the users go out of the sensor range.	9V Transformer	603410	
	NEPTUNE SHOWER PANEL 1000 TB	Exposed installation. Thermostatic mixing valve to adjust water temperature Default Wave Operation: Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control.	6 x 1.5 AA Batteries	602410	
	NEPTUNE SHOWER PANEL 1000 TE	Optional Prox Operation: Allows automatic activation when the users are within the sensor range, and stops when the users go out of the sensor range.	9V Transformer	604410	

PERFECT TIME

SHOWER PANELS

Electronically operated self closing shower panel operated by touch Operated by Piezo button/s in the shower panel. Series includes options for cold or premixed water, long version, thermostatic controled hot and cold water, and versions with an additional hand shower.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Thermostatic control for optimum temperature and scalding prevention (thermostatic models only)
- Aluminum panel with Epoxy coating for high corrosion resistance
- Provides a retrofit solution for old shower systems. Conceals damages and prevents the need of replacing tiles
- Default top inlet installation with options for rear inlet installation
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site



LEED RATING



PREVENT SCALDING

WATER SAVING OPTIONS

9 LPM	2.38 GPM	FLOW RESTRICTOR
7 LPM	1.85 GPM	FLOW RESTRICTOR
6 LPM	1.59 GPM	FLOW RESTRICTOR
5 LPM	1.06 GPM	FLOW RESTRICTOR



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PERFECT TIME SHOWER PANEL B	Exposed installation	6 x 1.5 AA Batteries	601400	
	PERFECT TIME SHOWER PANEL E		9V Transformer	603400	
	PERFECT TIME SHOWER PANEL LB	Exposed installation. Long panel 140 mm	6 x 1.5 AA Batteries	601402	
	PERFECT TIME SHOWER PANEL 1000 TB	Exposed installation.	6 x 1.5 AA Batteries	602400	
	PERFECT TIME SHOWER PANEL 1000 TE	Thermostatic mixing handle to adjust water temperature	9V Transformer	604400	
	PERFECT TIME SHOWER PANEL 1000 TB W/ HAND SHOWER	Exposed installation.	6 x 1.5 AA Batteries	602401	
	PERFECT TIME SHOWER PANEL 1000 TE W/ HAND SHOWER	Thermostatic mixing handle to adjust water temperature. Hand shower diverter	9V Transformer	604401	

NEW

PERFECT TIME M

SHOWER PANELS

Self-closing shower panel. Activated by manual push button. Incorporates an aluminum panel and vandal resistant shower head with easily cleanable silicone nozzles. The water flow will automatically shut off after a factory set flow time.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Thermostatic control for optimum temperature and scalding prevention (TM model)
- Aluminum panel with Epoxy coating for high corrosion resistance
- Provides a retrofit solution for old shower systems. Conceals damages and prevents the need of replacing tiles
- Default top inlet installation with options for rear inlet installation

WATER SAVING OPTIONS		
9 LPM	2.38 GPM	FLOW RESTRICTOR
7 LPM	1.85 GPM	FLOW RESTRICTOR
6 LPM	1.59 GPM	FLOW RESTRICTOR
5 LPM	1.06 GPM	FLOW RESTRICTOR



BALL VALVE ADAPTOR FOR TRANSFORMER THREADING

ROBUST BRASS SHOWER HEAD 9000



ALUMINUM PANEL


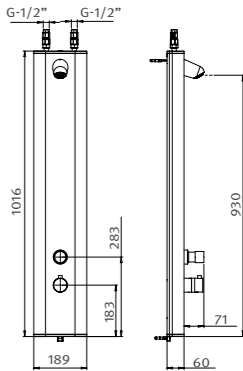

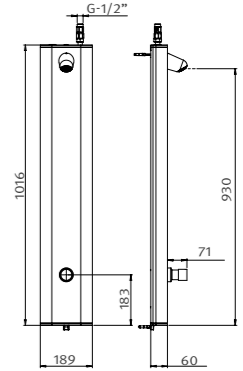
PIEZO BUTTON

METAL THERMOSTATIC MIXING HANDLE

THERMOSTATIC CARTRIDGE INTEGRATED WITH A HOT LIMIT STOPPER

IP67 BATTERY BOX

PERFECT TIME SHOWER PANEL 1000TB

PICTURE	PRODUCT NAME	MODEL FEATURES	CODE NUMBER	DRAWING
	PERFECT TIME SHOWER PANEL TM	Exposed installation Thermostatic mixing handle to adjust water temperature Flow time is adjustable onsite to between 10-40 seconds For hot and cold water	607100	
	PERFECT TIME SHOWER PANEL M	Exposed installation Flow time is adjustable onsite to between 10-40 seconds For cold or premixed water	607200	

NEPTUNE 1042 T

ELECTRONIC SHOWER CONTROL

Operated by IR sensor.

Series includes options for wave or prox operation. Features an integrated thermostatic mixer for anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Thermostatic control for optimum temperature and scalding prevention
- Includes double boxing and piping, so any potential leaks drain into the shower compartment
- Metallic panel and thermostatic handle
- Sensor settings adjustable by remote control



LEED RATING PREVENT SCALDING WAVE & PROX OPTIONS



PERFECT TIME 1042 T

ELECTRONICALLY OPERATED SELF CLOSING SHOWER CONTROL OPERATED BY TOUCH

Operated by a Piezo button integrated in the shower control.

Features an integrated thermostatic mixer for an anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Thermostatic control for optimum temperature and scalding prevention
- Includes double boxing and piping, so any potential leaks drain into the shower compartment
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Metallic panel and thermostatic handle



LEED RATING PREVENT SCALDING



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NEPTUNE 1042 T	<p>Concealed installation in concrete, brick walls.</p> <p>Thermostatic mixing handle to adjust water temperature</p> <p>Allows activation of the shower once the users place their hands at a close proximity to the sensor.</p> <p>Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass.</p> <p>The flow time is adjustable on site by remote control.</p>	Internal 9V battery	612280	
	NEPTUNE 1042 TE	<p>Optional Prox Operation:</p> <p>Allows automatic activation when the users comes within the sensor range, and stops when the users leave the sensor range.</p>	9V Transformer	612281	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PERFECT TIME 1042 T	<p>Concealed installation in concrete, brick walls.</p> <p>Thermostatic mixing handle to adjust water temperature</p> <p>Features an integrated piezo element.</p> <p>Touch activation</p> <p>When a user touches the designated area in the middle of the Piezo element a flow cycle of 120 seconds is completed.</p> <p>If the user does not need more water, he can touch the piezo area again to stop the water flow before the default time has passed, thus, saving more water.</p>	Internal 9V battery	612253	
	PERFECT TIME 1042 TE		9V Transformer	612254	

NEPTUNE MEDICAL

ELECTRONIC SHOWER CONTROL

Operated by IR sensor. Features an integrated thermostatic mixer for anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Thermostatic control for optimum temperature
- Ideal for healthcare institutions
- Chrome plated brass body. Metallic thermostatic handle
- Sensor settings adjustable by remote control
- Internal solenoid valve
- Ideal for retrofit installations



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NEPTUNE MEDICAL 1000 T	Exposed installation Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control. Optional Prox Operation: Allows automatic activation when the users comes within the sensor range, and stops when the users leave the sensor range.	Internal 9V battery	610250	
	NEPTUNE MEDICAL 1000 T BOTTOM OUTLET	Exposed installation. Bottom outlet Exposed installation Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control. Optional Prox Operation: Allows automatic activation when the users comes within the sensor range, and stops when the users leave the sensor range.	Internal 9V battery	610255	

TOUCH SH 1000 T

ELECTRONICALLY OPERATED SELF CLOSING SHOWER CONTROL OPERATED BY TOUCH

Operated by a Piezo element integrated in the shower control. Features an integrated thermostatic mixer for anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Thermostatic control for optimum temperature and scalding prevention
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Chrome plated brass body. Metallic thermostatic handle
- Stable and accurate water flow that can be changed on site
- Ideal for retrofit installations



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	TOUCH SH 1000 T	Exposed installation	Internal 9V battery	610710	
	TOUCH SH 1000 T BOTTOM OUTLET	Exposed installation. Bottom outlet	Internal 9V battery	610700	


THERMIX SH 1000T

SHOWER CONTROL

Wall mounted thermostatic shower control with bottom outlet. Brings and reassures safety and maximum comfort to commercial or residential washrooms. The Thermix, Stern's thermostatic manual line is part of Stern's thermostatic collection.

Advantages:

- 100% chrome plated brass body
- All the parts are accessible from the front



PICTURE	PRODUCT NAME	MODEL FEATURES	CODE NUMBER	DRAWING
	THERMIX SH 1000 T	Exposed installation Manual operation	610400	

NEPTUNE 1032

ELECTRONIC SHOWER CONTROL

Operated by IR sensor.

Series includes options for wave or prox operation. Features an integrated thermostatic mixer for anti scalding operation and temperature control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against crosscontamination
- 100% chrome plated brass body
- Sensor settings adjustable by remote control
- Internal solenoid valve, sensor and battery. All the parts are accesible from the front



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NEPTUNE 1032	Concealed installation in concrete, brick walls Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control.	Internal 9V battery	613200	
	NEPTUNE 1032 E	Optional Prox Operation: Allows automatic activation when the users comes within the sensor range, and stops when the users leave the sensor range.	9V Transformer	613400	

PERFECT TIME SH 1032

ELECTRONICALLY OPERATED SELF CLOSING SHOWER CONTROL OPERATED BY TOUCH

Operated by a Piezo element integrated in the shower control. For cold or premixed water.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- 100% chrome plated brass body
- Easy installation



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PERFECT TIME SH 1032	Concealed installation in concrete, brick walls	Internal 9V battery	613700	
	PERFECT TIME SH 1032 E		9V Transformer	613800	

PROX, WAVE & TOUCH SOLUTIONS



TOUCH FREE & TOUCH OPERATED SHOWER KITS

Operated by an IR sensor or a Piezo button. Can be integrated with a shower panel, shower control or as an individual unit. For cold or premixed water.

Advantages:

TOUCH FREE OPERATION:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control

TOUCH OPERATION:

- Drastically reduces water consumption
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PROX KIT FOR SHOWER	Concealed installation in dry or plaster wall. Option for front fixation installation in concrete, brick walls. Touch free Prox Operation Allows automatic activation when the users bring their hands within the sensor range, and stops when the users remove their hands.	9V battery / 9V transformer	620000	
	WAVE KIT FOR SHOWER	Concealed installation in dry or plaster wall. Option for front fixation installation in concrete, brick walls. Touch free Wave Operation Allows activation of the shower once the users place their hands at a close proximity to the sensor. Water will shut off if the users place their hands at a close proximity to the sensor again or once a factory set flow time of 120 seconds will pass. Flow time is adjustable by remote control.	9V battery / 9V transformer	620810	
	PROGRAMMABLE PIEZO KIT FOR SHOWER	Concealed installation in dry or plaster wall. Option for front fixation installation in concrete, brick walls. Touch Operation Allows activation of the shower / unit once the users touch the designated area in the Piezo button. Water will shut off if the users touch the designated area again or once a factory set flow time of 120 seconds will pass.	9V battery / 9V transformer	07225019	
	APS THREADED ROD KIT SHOWER	Threaded rod solution for piezo kits installations in thick walls. Kit includes Piezo switch, threaded rod with rosette and solenoid valve. Touch Operation Allows activation of the shower / unit once the users touch the designated area in the Piezo button. Water will shut off if the users touch the designated area again or once a factory set flow time of 120 seconds will pass.	9V battery / 9V transformer	07226054	
	PPS HIGH SECURITY KIT FOR SHOWER	Specially designed for high security environments. The kit includes a shower head and piezo switch that are incorporated in a brass sleeve. For concealed installation in concrete, brick walls.	Not included	07226033	
	PROGRAMMABLE PIEZO KIT FOR BEACH SHOWER COLUMNS	Self-closing piezo kit for showers. Activated by touching the designated area. Kit includes a programmable piezo switch, solenoid valve with housing. Filter and valve are located in the IP67 waterproof dual power input box. The shower will automatically shut off after a factory set flow time of 30 seconds would pass. Flow time adjustable on site if required. Dual power input box can be used to operate the product by battery or transformer. When used with a transformer it has an integrated automatic battery backup.	9V battery / 9V transformer	07226050	

FOOT WASHFREE

ELECTRONICALLY OPERATED SELF CLOSING FOOT WASHER OPERATED BY TOUCH

Operated by a Piezo element integrated in the foot washer cap.
For cold or premixed water.





Advantages:


- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- More possibilities to save water: the water flow can be stopped in the middle of the cycle
- Stable and accurate water flow that can be changed on site
- Ideal for swimming pools, beaches and ritual foot washing
- Heavy duty chrome plated brass construction
- Silicone nozzles for easy cleaning
- Easy installation



WATER SAVING OPTIONS			
9 LPM	2.38 GPM	FLOW RESTRICTOR	
7 LPM	1.85 GPM	FLOW RESTRICTOR	
6 LPM	1.59 GPM	FLOW RESTRICTOR	



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	FOOT WASHFREE	Exposed installation	Internal 9V battery	113730	
	FOOT WASHFREE 3000	Exposed installation. Directional shower head	Internal 9V battery	113720	

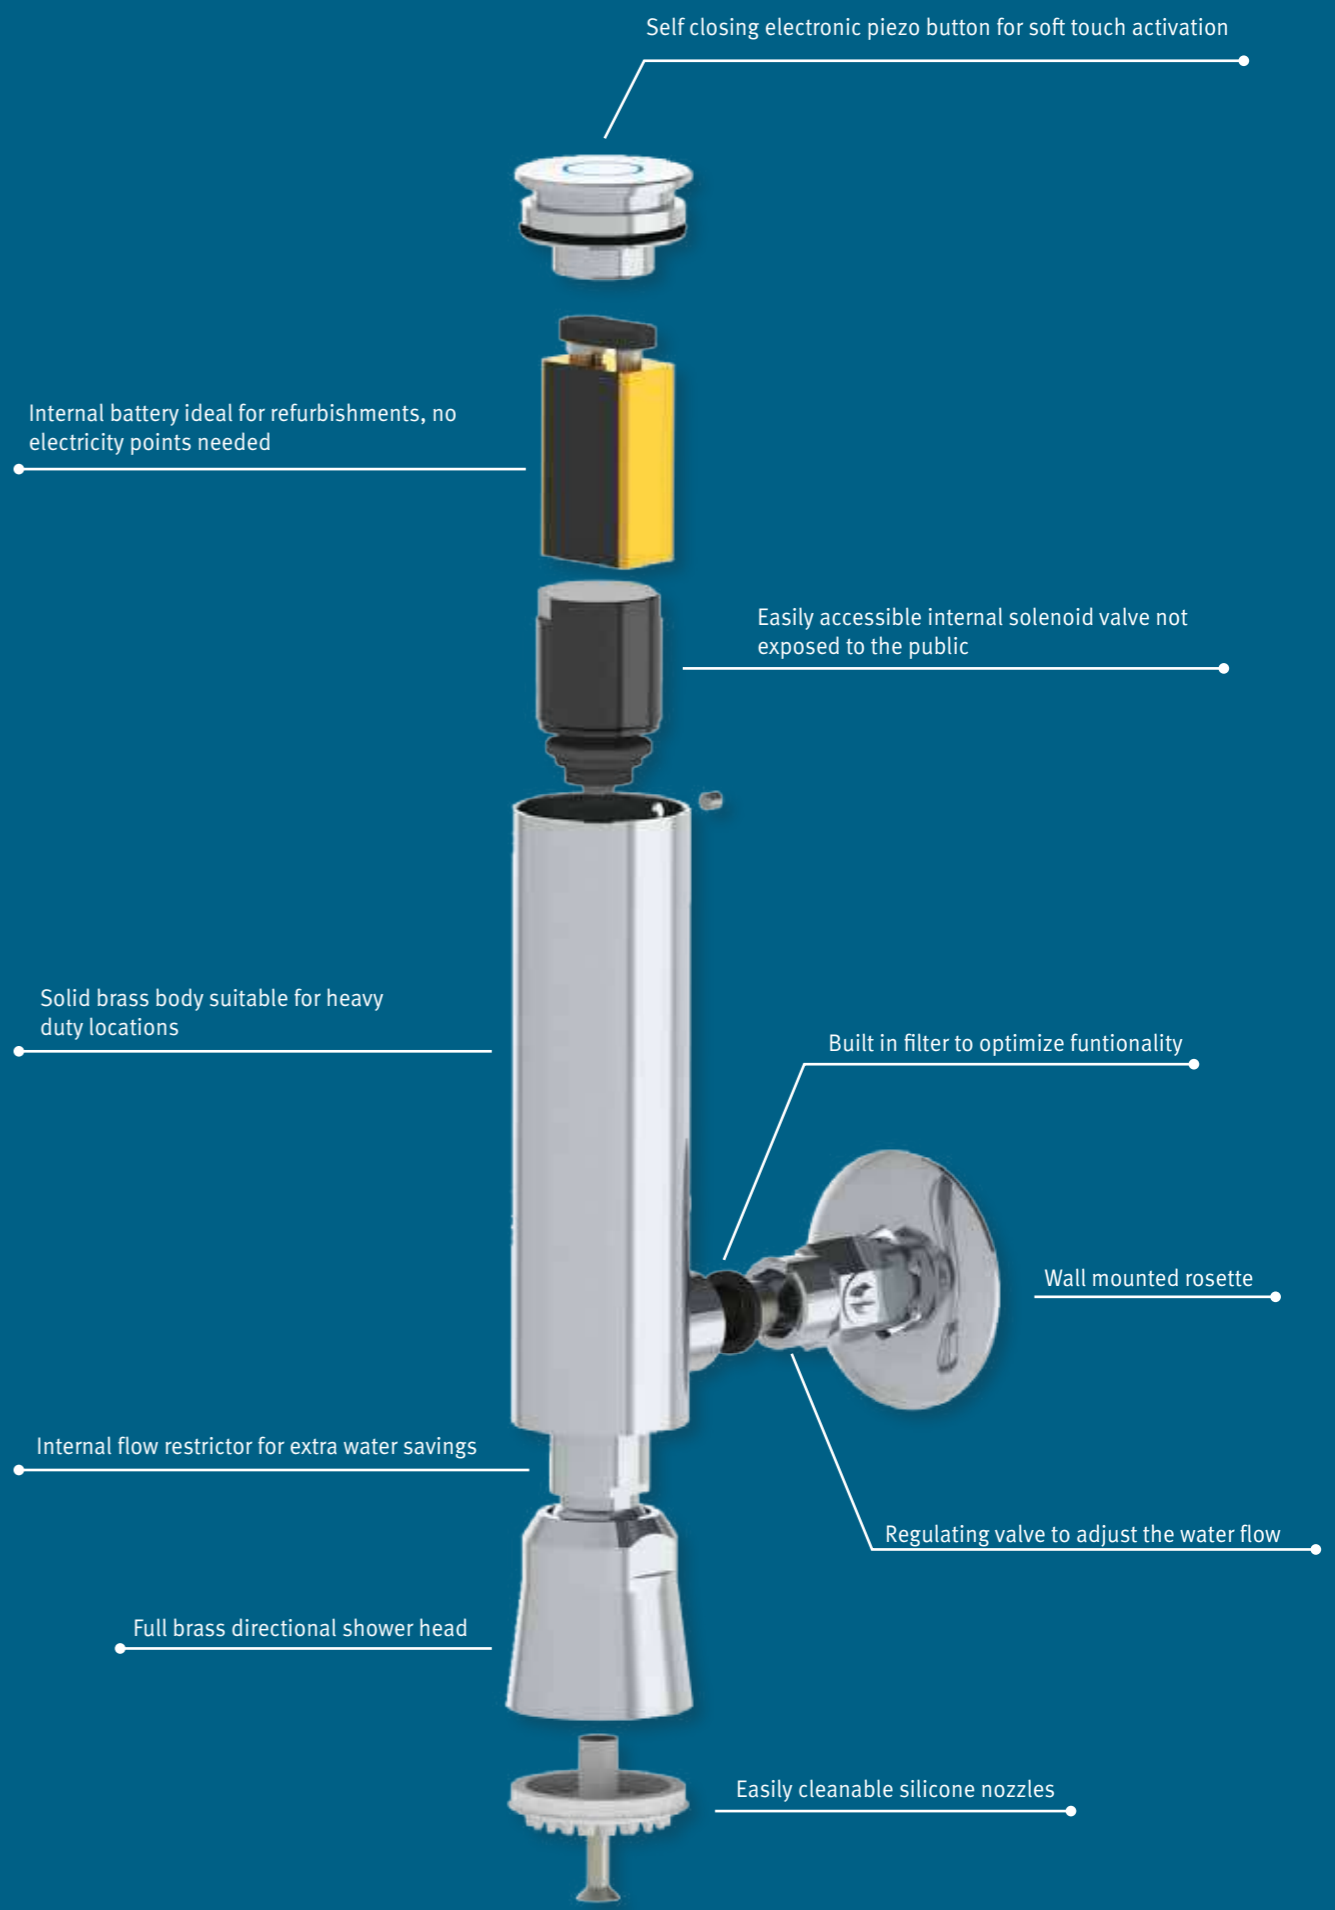

FOOT WASHFREE 3000

URINALS & TOILETS

113-132



JUPITER 2040 **115**



NARA 2030 **116**



JUPITER 1032 **117**



JUPITER 1011 **117**



FREE SERIES **118**



JUPITER 3002 **119**



PROX FOR URINALS **120**



NOBLE 3032 **121**



NARA 3002 **122**



NARA 2032 **123-125**
NARA 2022



VENUS COMFORT **126**
2032



VENUS COMFORT **127**
2032 DF



PERFECT TIME 2032 **127**



VENUS 3002 **128**



APS KIT FOR TOILETS **129**
WITH DISTANT CONTROL



PROX, WAVE & **130**
TOUCH SOLUTIONS
FOR TOILET



PROX & WAVE **131**
SENSOR KIT
FOR TOILET



ELECTROMAGNETIC **132**
CISTERN SYSTEM

JUPITER 2040 SERIES

Concealed electronic flush valve for urinal operated by IR sensor.
Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Stainless steel AISI316 panel
- Sensor settings adjustable by remote control
- Easy installation



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



LEED RATING


IRON FRAME AVAILABLE

NARA 2030 SERIES

Concealed electronic flush valve for urinal operated by IR sensor.
Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation
- Matching flush valve for toilets available.


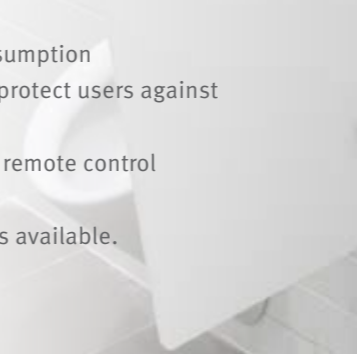

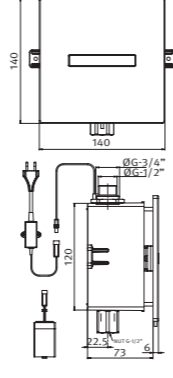



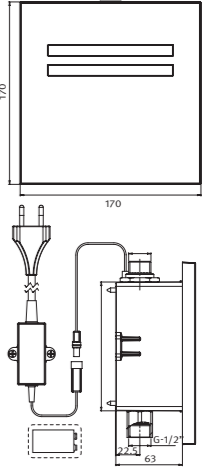
Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



LEED RATING

IRON FRAME AVAILABLE

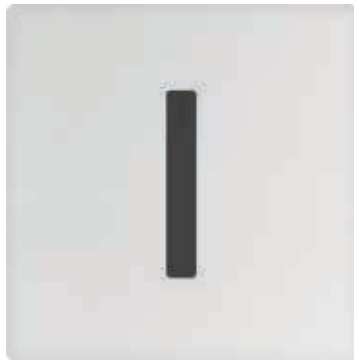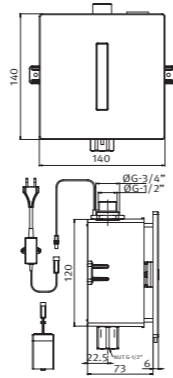PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	JUPITER 2040	Iron frame available. See also page 139	Internal 9V battery	125900	
	JUPITER 2040 E		9V Transformer	125901	
	JUPITER 2040 H	Iron frame available. See also page 139	Internal 9V battery	125910	
	JUPITER 2040 HE		9V Transformer	125911	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2030	Iron frame available. See also page 139	Internal 9V battery	170200	
	NARA 2030 E		9V Transformer	170100	

JUPITER 1032 SERIES

Concealed electronic flush valve for urinal operated by IR sensor.
Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- 100 % brass chrome plated body
- Sensor settings adjustable by remote control



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	JUPITER 1032	Concealed installation	Internal 9V battery	134510	
	JUPITER 1032 E		9V Transformer	134520	

JUPITER 1011

EXPOSED ELECTRONIC FLUSH VALVE FOR URINAL

Operated by IR sensor.
Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- 100 % brass chrome plated body
- Sensor settings adjustable by remote control
- Easy installation



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hours duty flush. The flush takes place after 24 hours of non use have passed. Prevents the trap seal from drying out, possible freezing of pipes, and gets rid of potential bacteria in stuck water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	JUPITER 1011	Exposed installation. (Pipes not supplied)	Internal 9V battery	132100	

FREE SERIES

Exposed electronic flush valve for urinal operated by IR sensor.
Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- 100 % brass chrome plated body
- Sensor settings adjustable by remote control
- Easy installation



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	FREE	Standard	Internal 9V battery	113100	
	FREE E		9V Transformer	113200	
	FREE SP	Includes a 200 mm bended pipe and spray. Option for a 300 mm pipe.	Internal 9V battery	800504	

JUPITER 3002 SERIES

Exposed electronic flush valve for urinal operated by IR sensor. Includes a manual override flush activator button, integral flow regulator, in line filter, high pressure vacuum breaker and adjustable tail piece. Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- 100% brass chrome plated body
- Sensor settings adjustable by remote control
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	JUPITER M 0.5 GPF	Side inlet. Manual override flush activator button.	Internal 9V battery	140112	
	JUPITER ME 0.5 GPF	Specially designed for the needs of the North American market	9V Transformer	140516	
	JUPITER 3002 M	Rear inlet. Manual override flush activator button	Internal 9V battery	140215	
	JUPITER 3002 EM		9V Transformer	140315	

PROX SOLUTIONS

Electronic flush valve kit for urinal.

Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- 100% brass chrome plated body
- Sensor settings adjustable by remote control
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



Prox Sensors with Special Finishes

Touch free prox sensor operation now available in a wide variety of special finishes to complete the interior design of your commercial restroom.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PROX KIT FOR URINAL	Suitable for duct concealed installations (plaster walls)	9V Battery / 9V Transformer	620700	
	PROX FRONT FIXATION KIT FOR URINALS	Suitable for concrete walls installation	9V Battery / 9V Transformer	620750	

NOBLE 3032 SERIES

Concealed electronic flush valve for toilet operated by IR sensor. Features a dual flush IR system.

Includes models with a Piezo override flush activator switch giving the user the possibility of alternative manual touch activation.

Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation and maintenance. Full access to components by removing the panel
- Matching flush valve for urinals available



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



LEED RATING



IRON FRAME AVAILABLE

NARA 3002 SERIES

Concealed electronic flush valve for toilet operated by IR sensor. Features a dual flush IR system.

Includes models with a Piezo override flush activator switch giving the user the possibility of alternative manual touch activation.

Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation and maintenance. Full access to components by removing the panel
- Matching flush valve for urinals available



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



LEED RATING



IRON FRAME AVAILABLE

ELECTRONIC FLUSH VALVE WITH A MANUAL OVERRIDE FLUSH BUTTON					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NOBLE 3032 P	Piezo override push button anti-block feature. Dual flush. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor a half flush (3 liters) will take place. For more than one minute in front of the sensor a full flush (4.5 liters) will take place.	6 x 1.5V Batteries	460720	
	NOBLE 3032 PE	Iron frame available.	9V Transformer	460730	
	NOBLE 3032	Manual override push button anti-block feature. Dual flush. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor a half flush (3 liters) will take place. For more than one minute in front of the sensor a full flush (4.5 liters) will take place.	6 x 1.5V Batteries	460700	
	NOBLE 3032 E	Iron frame available.	9V Transformer	460710	

ELECTRONIC FLUSH VALVE WITH A MANUAL OVERRIDE FLUSH BUTTON					
PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 3002	Manual override push button anti-block feature. Dual flush. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor a half flush (3 liters) will take place. For more than one minute in front of the sensor a full flush (4.5 liters) will take place.	9V Battery	160810	
	NARA 3002 E	Iron frame available.	9V Transformer	160820	
	NARA 3002 P	Piezo override push button anti-block feature. Dual flush. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor a half flush (3 liters) will take place. For more than one minute in front of the sensor a full flush (4.5 liters) will take place.	9V Battery	160830	
	NARA 3002 PE	Iron frame available.	9V Transformer	160840	

NARA 2032 & NARA 2022 SERIES


Concealed electronic flush valve for toilet operated by IR sensor. Features a dual flush IR system.

Includes models with a Piezo override flush activator switch giving the user the possibility of alternative manual touch activation.

Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Sensor settings adjustable by remote control
- Easy installation
- Matching flush valve for urinals available

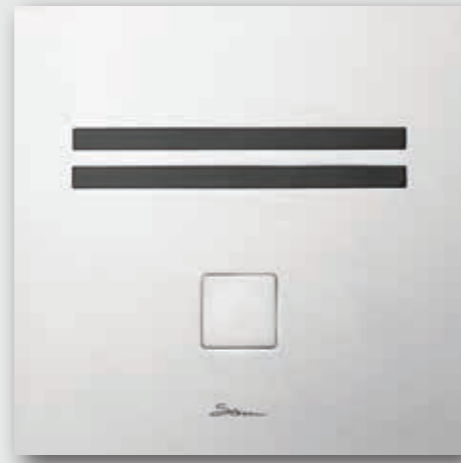

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.







LEED RATING




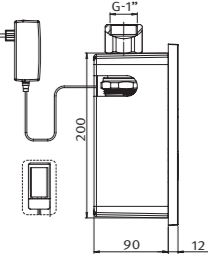


IRON FRAME AVAILABLE



ELECTRONIC FLUSH VALVE WITH A MANUAL OVERRIDE FLUSH BUTTON

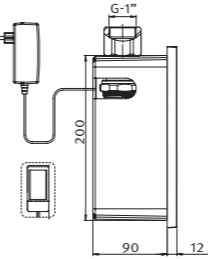PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2032	Dual Flush. Features a mechanical override flush activator button. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor, a half flush (3 liters) will take place. For more than one minute, a full flush (6 liters) will take place. Iron frame available. See also page 139	9V Battery	160310	
	NARA 2032 E		9V Transformer	160410	
	NARA ECO 2032	Dual Flush. Features a mechanical override flush activator button. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor, a half flush (3 liters) will take place. For more than one minute, a Leed full flush (4.5 liters) will take place. Iron frame available. See also page 139	9V Battery	160320	
	NARA ECO 2032 E		9V Transformer	160330	


ELECTRONIC FLUSH VALVE WITH A TOUCH FLUSH BUTTON

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2032 P	Dual Flush. Features a touch flush activator button. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor, a half flush (3 liters) will take place. For more than one minute, a full flush (6 liters) will take place. Iron frame available. See also page 139	9V Battery	160610	
	NARA 2032 PE		9V Transformer	160510	
	NARA ECO 2032 PE	Dual Flush. Features a touch flush activator button. Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor, a half flush (3 liters) will take place. For more than one minute, a Leed full flush (4.5 liters) will take place. Iron frame available. See also page 139	9V Transformer	160340	

ELECTRONIC FLUSH VALVE WITH A TOUCH FLUSH BUTTON

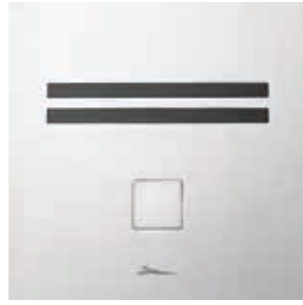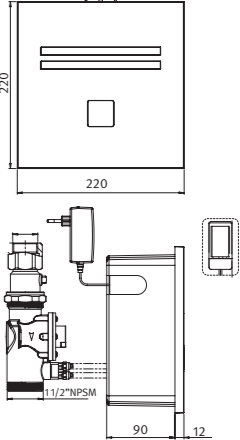PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2022	Dual flush.	9V Battery	160750	
	NARA 2022 E	Features a hydraulic override flush activator button	9V Transformer	160700	

ACCESSORIES

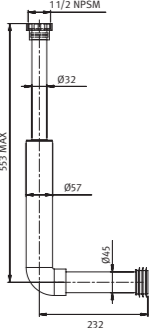PRODUCT NAME	MODEL FEATURES	CODE NUMBER	DRAWING
SET OF PIPES	Set of pipes for in wall installation	07291037	

SHUT OFF VALVE

IR SENSOR:

- a. Dual flush program
- b. Hygiene flush function (disabled)
- c. Sensor functions adjustable by remote control

9V BATTERY BOX

BOX FOR CONCEALED INSTALLATION

METAL PANEL

with a mechanical override button

FLUSH VALVE

REMOTE CONTROL

SET OF PIPES

VENUS COMFORT 2032 SERIES

Concealed electronic flush valve for toilet operated by IR sensor. Dual flush IR system upon request. Includes models with a Piezo override flush activator switch, giving the user the possibility of alternative flushing with an easy touch activation.

Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Stainless steel AISI316 panel
- Sensor settings adjustable by remote control
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



LEED RATING



IRON FRAME AVAILABLE

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	VENUS COMFORT 2032	Optional dual flush. Features a manual override flush activator button. Iron frame available. See also page 138	9V Battery	410562	
	VENUS COMFORT 2032 E	Optional dual flush. Features a manual override flush activator button. Iron frame available. See also page 138	9V Transformer	410541	
	VENUS COMFORT 2032 P	Optional dual flush. Features a piezo override flush activator button. Iron frame available. See also page 138	9V Battery	410576	
	VENUS COMFORT 2032 PE	Optional dual flush. Features a piezo override flush activator button. Iron frame available. See also page 138	9V Transformer	410546	
	VENUS XS 2032E	Features a manual override flush activator button.	9V Transformer	410601	

VENUS COMFORT 2032 DF


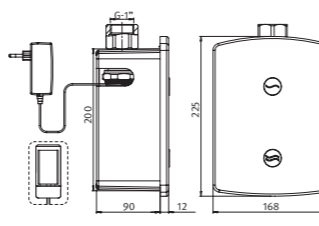
Concealed electronic self closing flush valve for toilet operated by touch.
Features two Piezo switches integrated in the panel for dual flush operation.
Flushing duration can be changed on site according to the specific site requirements.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Easy touch activation to allow use by young children, elderly and disabled people
- Stainless steel AISI316 panel
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	VENUS COMFORT 2032 DF	Dual Flush Iron frame available. See also page 141	9V Battery	410446	
	VENUS COMFORT 2032 DFE	The system delivers a reduced 3 liters flush when the user touches the one (1) wave button and a full 6 liters flush when the user touches the two (2) waves button.	9V Transformer	410447	


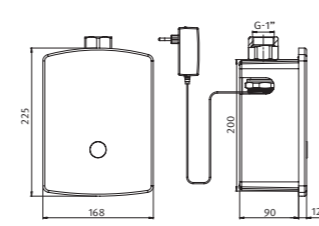
PERFECT TIME 2032

Concealed electronic self closing flush valve for toilet operated by touch.
Features a Piezo switch integrated in the panel. Flushing duration can be changed on site according to the specific site requirements.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Easy touch activation to allow use by young children, elderly and disabled people
- Stainless steel AISI316 panel
- Easy installation



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PERFECT TIME 2032 E	Iron frame available. See also page 138	9V Transformer	410761	



VENUS 3002 SERIES









Exposed electronic flush valve for toilet operated by IR sensor. Includes a manual override flush activator button, integral flow regulator, in line filter, high pressure vacuum breaker and adjustable tail piece. Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- 100 % brass chrome plated body
- Sensor settings adjustable by remote control
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	VENUS 1.28 GPF	Side inlet. Specially designed for the needs of the North American market	Internal 9V battery	420242	
	VENUS E 1.28 GPF		9V Transformer	420232	
	VENUS 3002 R	Side inlet. Manual override flush activator button Allows automatic activation when the users have left the toilet.	Internal 9V battery	420241	
	VENUS 3002 RE		9V Transformer	420265	
	VENUS 3003R PE	Designated for high security locations. Operated by remote activation Piezo button located in the inmate's cell, while the flush valve body is concealed in the service area. Each activation gives a pre-set run cycle Allows activation of the toilet once the user touches the designated area in the Piezo button.	9V Transformer	420280	
	VENUS 3002	Rear inlet. Features a mechanical override push button to enable manual operation. Dual flush version available.	Internal 9V battery	420255	
	VENUS 3002 E		9V Transformer	420231	

APS KIT FOR TOILETS WITH DISTANT CONTROL

Electronically operated self closing flush valve for toilet with distant control, designed for special needs or high security locations. Can be operated by a Piezo button located in the toilet area, or using the remote panel for alternative operation. Each activation gives a pre-set run cycle.

Advantages:

- Drastically reduces water consumption
- No moving parts, ideal for heavy duty areas
- Non hold open feature
- Easy touch activation to allow use by young children, elderly and disabled people
- Stainless steel AISI316 panel
- Easy installation



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PIEZO KIT FOR W.C. WITH DISTANT CONTROL	Suitable for duct concealed installations (plaster walls) Default Special needs version: Includes a BPS Piezo switch to be installed in the toilet area for standard operation and a remote panel to be installed in a remote location for an alternative easy activation.	9V transformer	07226042	
		Suitable for duct concealed installations (plaster walls) Optional High security version: Includes a BPS switch located in the inmate's cell that allows to flush the toilet, while the flush valve body is concealed in the service area. The remote panel, installed outside the cell, allows disabling the system to perform sudden search procedures for drugs or weapons. Includes a Red ring of light indication when the system is disabled. Once disabled, the system can be enabled manually by the prison personnel or automatically after one hour.			

PROX, WAVE & TOUCH SOLUTIONS

Touch free & Touch operated flush valve for toilet kits.

Electronic modular flush valve for toilet for installation in the wall or panel. Flushing duration and other settings are adjustable by remote control.

Advantages:

TOUCH FREE OPERATION:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- 100 % brass chrome plated housing
- Sensor settings adjustable by remote control
- Easy installation

TOUCH OPERATION:

- Drastically reduces water consumption
- Non hold open feature
- Stable and accurate water flow that can be changed on site
- 100 % brass chrome plated housing
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



Prox Sensors with Special Finishes

Touch free prox sensor operation now available in a wide variety of special finishes to complete the interior design of your commercial restroom.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PROX KIT FOR TOILETS	Suitable for duct concealed installations (plaster walls) Touch free Prox Operation Allows automatic activation when the users have left the toilet.	9V Battery / 9V Transformer (not included)	620100	
	WAVE ON/OFF SENSOR KIT FOR TOILET	Suitable for duct concealed installations (plaster walls) Touch free Wave Operation Allows flushing of the toilet once the users place their hands at a close proximity.	9V Battery / 9V Transformer (not included)	620600	
	APS KIT FOR TOILETS	Suitable for duct concealed installations (plaster walls) Touch Operation Allows activation of the toilet once the users touch the designated area in the Piezo button.	9V Battery / 9V Transformer (not included)	07225018	

PROX & WAVE SENSOR KIT FOR TOILET WITH PRIMARY FLUSH

This kit is designed to operate a two volumes flush valve. The sensor detects the user at a given distance, and operates an automatic flush using the sensor's prox function once the user has left the toilet. Depending on time and distance, the systems delivers 3 liters to evacuate liquids and 6 liters to evacuate solids. To maximize hygiene, the system allows the user upon arriving to the toilet to operate a primary cleaning flush using the sensor's wave function.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Primary cleaning flush upon presentation of hand
- Options for duct concealed and brick wall (front fixation) installations.
- Water saving dual flush performance
- Bespoke settings adjustable with the Stern remote control
- Maximum achievement of LEED points

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	PROX & WAVE SENSOR KIT FOR TOILET	<p>Suitable for duct concealed installations (plaster walls).</p> <p>Primary cleaning flush Allows the user to operate a cleaning flush before using the system. The 3 liters flush takes places when the user presents his hand at a short distance at the front of the sensor.</p> <p>Dual Flush The system will operate a half flush (3 liters) or a full flush (6 liters) based on a time and distance equation.</p>	9V Battery / 9V Transformer (not included)	620100 (Prox & Wave program)	

ELECTROMAGNETIC CISTERN SYSTEM

Concealed electronic flushing system for cistern activated by an infrared wave sensor.

Options for a single or dual flush activations. Includes an integral overflow pipe (warning pipe) to prevent flooding, and two integrated filters.

Pre-flush optional upon request. Hygiene flush is included. Flushing duration and other settings are adjustable by remote control.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Cistern body in high density polyethylene, sensor unit/s in chrome plated brass
- Integral overflow flood prevention pipe
- Top and side access
- Sensor settings adjustable by remote control
- Easy installation

Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.

DUAL SERVICE ACCESS (FRONT / TOP)



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ELECTROMAGNETIC SF CISTERN	<p>Single flush Allows flushing of the toilet once the users place their hands within the sensor range. Available in a variety of special finishes.</p>	12V 2.5 Amp IP68 Transformer	620620	
	ELECTROMAGNETIC DF CISTERN	<p>Dual flush Allows flushing of the toilet once the users place their hands within sensor range. Operating the small sensor will activate a half flush (3liters) and operating the large sensor will activate a full flush (6 liters).</p>	12V 2.5 Amp IP68 Transformer	620630	
ACCESSORIES		<ol style="list-style-type: none"> 1. DF EL. CISTERN VALVE W/OVERRIDE 2. WAVE ON/OFF FOR CISTERN 3. ADJUSTMENT ARM FOR C57(VERB) 4. IP68 ENCAP.SWITCH 13.5V/2.5A TRANSFORMER EU-M 		<p>07140067</p> <p>07224101</p> <p>07120348</p> <p>06522142</p>	

IRON FRAME SETS

133-140



SOAP, WATER & AIR **135-136**
FRAME SETS



W.C. **137-138**
FRAME SETS



URINALS **139**
FRAME SETS



ARTIS G CISTERN **140**
FRAME SET

SOAP, WATER & AIR FRAME SETS

Iron mounting frame set.

Touch free soap dispenser, touch free faucet and hi-speed hand dryer for public bathroom use.

Operated by IR sensor. The system includes mounting support for the washbasin, faucet, soap dispenser and hand dryer, available with full brass body or AISI316 material.


Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Minimizes hand washing drips to floors and counters
- Provides a complete electronic soap, water and air experience as well as the complete installation package
- Contains 9 mm holes for use in wood frame construction
- Galvanized leg support, adjustable height 0-200 mm
- Powder coated, blue color
- Retractable leg supports to -50 mm
- Rotating foot plate
- Supplied with all the needed fixing accessories
- Protection cover that protects the service opening against moisture and dirt and can be cut to length
- Frame with C profile 40/40 mm
- Frame height from 1140 mm to 1340 mm
- Modular. Option to order with soap dispenser, faucet or hand dryer only or any combination



PICTURE	PRODUCT NAME	POWER SUPPLY	CODE NUMBER	DRAWING
	QUADRAT DP SOAP&WATER KE	12V Transformer and power splitter	500400	
	MALMO 1000 DP SOAP&WATER KE	12V Transformer and power splitter	500350	

PICTURE	PRODUCT NAME	POWER SUPPLY	CODE NUMBER	DRAWING
	TUBULAR DP TRIO KE	12V Transformer and power splitter	500120	
	D28 DP SOAP&WATER KE	12V Transformer and power splitter	500100	
	TUBULAR DP SOAP&WATER KE	12V Transformer and power splitter	500200	

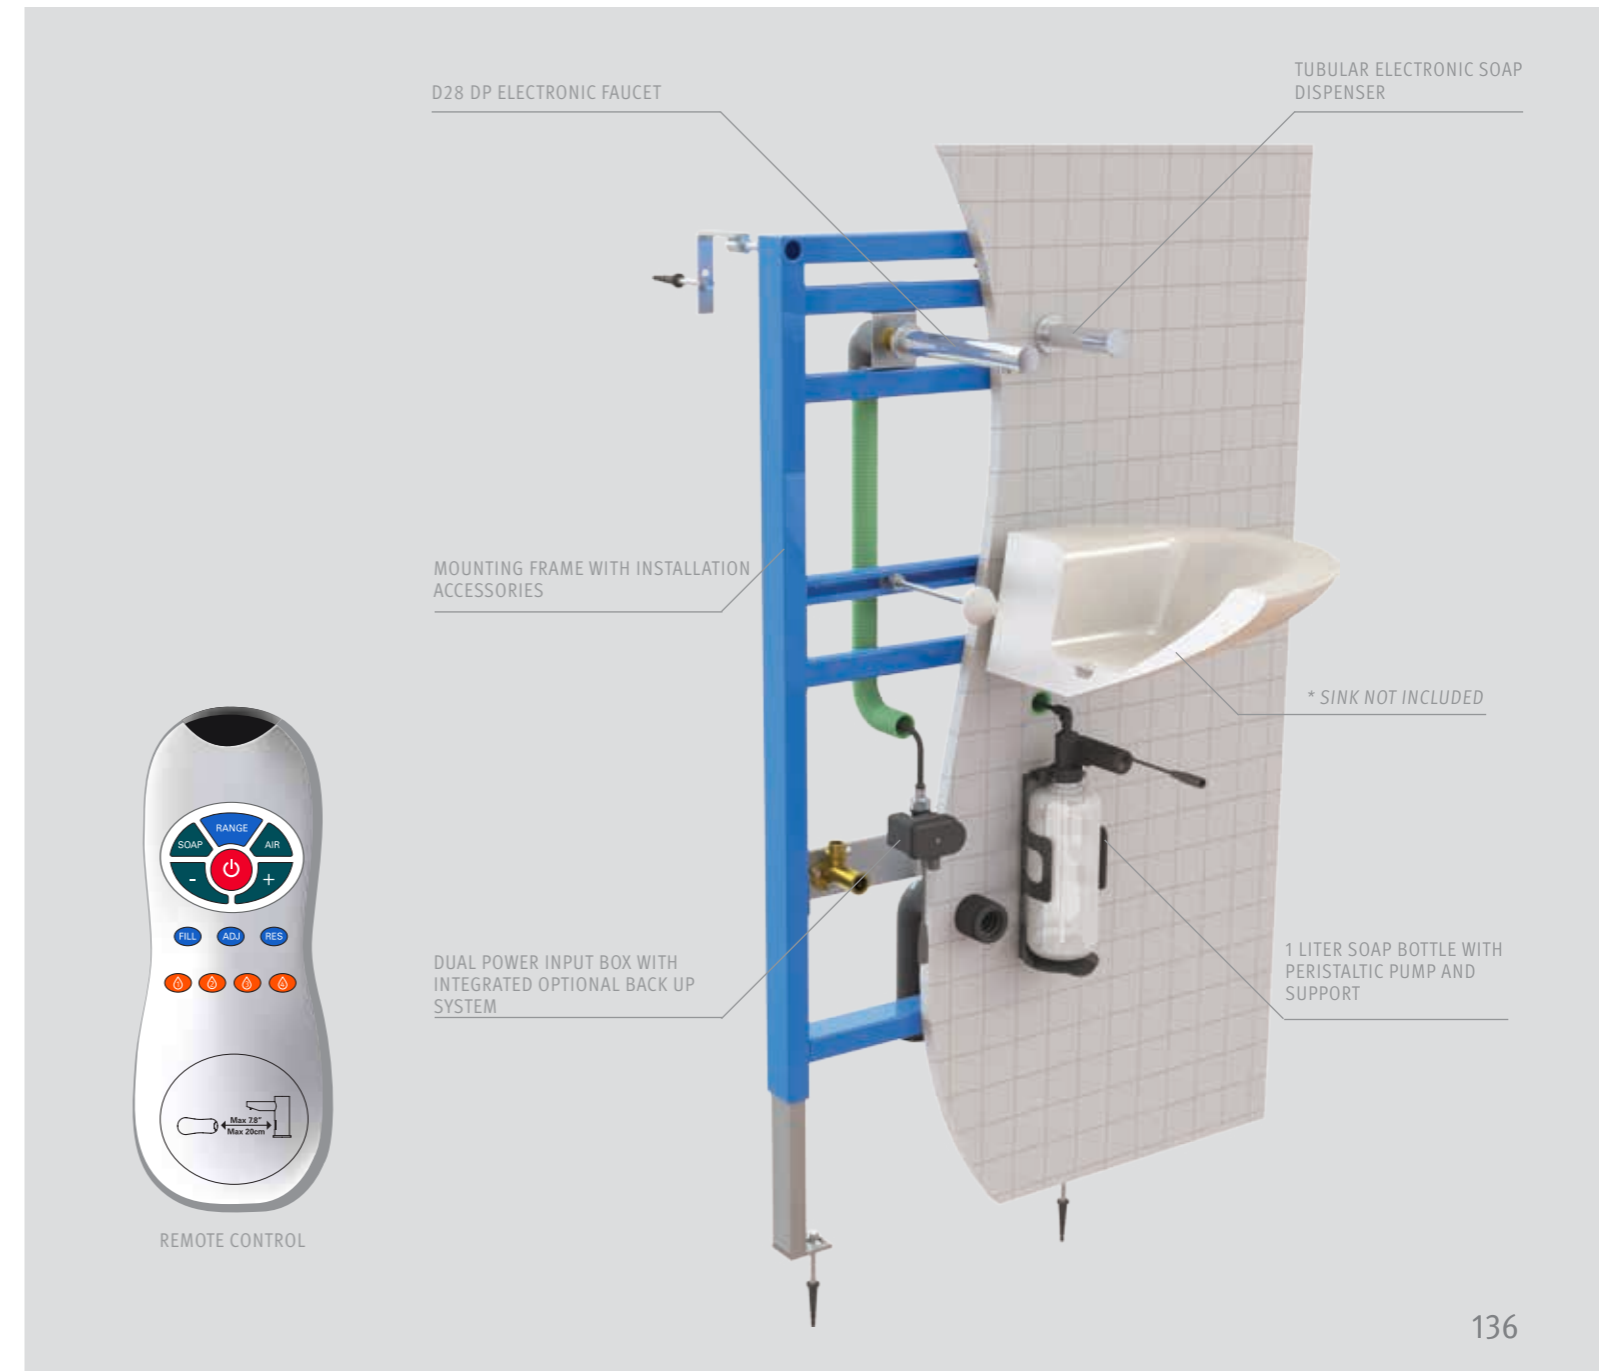

W.C. FRAME SETS

Electronic WC Frame Set.

Galvanized steel iron frame system for wall hang toilets.

For concrete or dry walls with four (4) steel screws. Delivered ready for installation with flush valve and complete required accessories included.

* Toilet bowl not included

Advantages:

- Suitable for installations in solid or drywall construction
- Contains 9 mm holes for use in wood frame construction
- Galvanized leg support, adjustable height 0-200 mm
- Powder coated, blue color
- Rotating foot plate
- For structures on the floor, leg supports retractable to -50 mm
- Supplied with all the needed fixing accessories
- Stop valve with throttle pre-mounted
- Protection cover that protects the service opening against moisture and dirt and can be cut to length
- Frame with C profile 40/40 mm
- Frame height from 1140 mm to 1340 mm



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hours duty flush. The flush takes place after 24 hours of non use have passed. Prevents the trap seal from drying out, possible freezing of pipes, and gets rid of potential bacteria in stuck water. This function can be disabled using the remote control.



W.C. FRAME SETS

Iron mounting frame set.

Galvanized steel iron frame system for wall hang toilets. Delivered ready for installation with flush valve and complete required accessories included. Options for touch or touch free operation.






* Toilet bowl not included


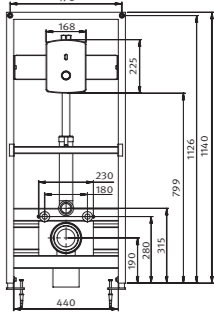



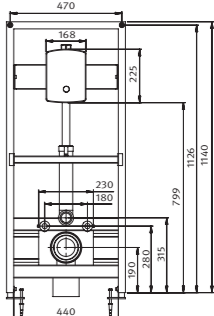
Advantages:

- Suitable for installations in solid or drywall construction
- Contains 9 mm holes for use in wood frame construction
- Galvanized leg support, adjustable height 0-200 mm
- Powder coated, blue color
- Rotating foot plate
- For structures on the floor, leg supports retractable to -50 mm
- Supplied with all the needed fixing accessories
- Stop valve with throttle pre-mounted
- Protection cover that protects the service opening against moisture and dirt and can be cut to length
- Frame with C profile 40/40 mm
- Frame height from 1140 mm to 1340 mm

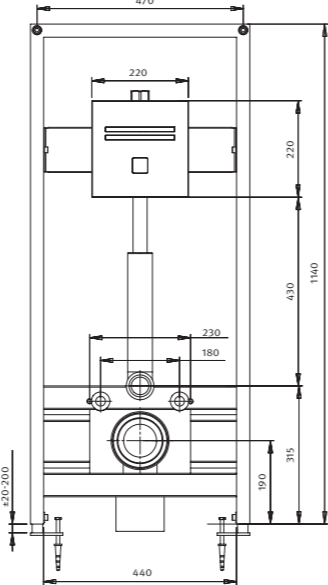Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hours duty flush. The flush takes place after 24 hours of non use have passed. Prevents the trap seal from drying out, possible freezing of pipes, and gets rid of potential bacteria in stuck water. This function can be disabled using the remote control.



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2032 K	Dual flush The sensor controls the flushing according to the time the user spends within the sensor range. If the user spends less than one (1) minute within the sensor range a reduced 3 liters flush will take place. If the user spends one (1) minute or more within the sensor range a full 6 liters flush will take place.	9V Battery	800271	
	NARA 2032 KE	Features a manual override flush activator button.	9V Transformer	800276	
	NARA 2032 PK	Dual flush The sensor controls the flushing according to the time the user spends within the sensor range. If the user spends less than one (1) minute within the sensor range a reduced 3 liters flush will take place.	9V Battery	800287	
	NARA 2032 PKE	If the user spends one (1) minute or more within the sensor range a full 6 liters flush will take place. Features touch override flush piezo button.	9V Transformer	800279	

PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	VENUS COMFORT 2032 K	Dual flush IR system upon request. Features a manual override flush activator button.	9V Battery	800206	
	VENUS COMFORT 2032 KE		9V Transformer	800218	
	VENUS COMFORT 2032 DF K	Dual flush IR system upon request. Features two Piezo flush activator switches for each flush volume.	9V Battery	800221	
	VENUS COMFORT 2032 DF KE		9V Transformer	800236	
	PERFECT TIME 2032KE	Operated by a piezo switch integrated in the panel.	9V Transformer	800286	

URINALS FRAME SETS

Iron mounting frame set.

Delivered ready for installation with flush valve and complete required accessories included.

* Urinal bowl not included

Advantages:

- Suitable for installations in solid or drywall construction
- Contains 9 mm holes for use in wood frame construction
- Galvanized leg support, adjustable height 0-200 mm
- Powder coated, blue color
- Rotating foot plate
- For structures on the floor, leg supports retractable to -50 mm
- Stop valve with throttle pre-mounted
- Protection cover that protects the service opening against moisture and dirt and can be cut to length
- Frame with C profile 40/40 mm
- Frame height from 1140 mm to 1340 mm



Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hours duty flush. The flush takes place after 24 hours of non use have passed. Prevents the trap seal from drying out, possible freezing of pipes, and gets rid of potential bacteria in stuck water. This function can be disabled using the remote control.



LEED RATING

PICTURE	PRODUCT NAME	POWER SUPPLY	CODE NUMBER	DRAWING
	NARA 2030 K	9V Battery	800277	
	NARA 2030 KE	9V Transformer	800278	
	JUPITER 2040 K	9V Battery	800241	
	JUPITER 2040 KE	9V Transformer	800251	

ARTIS G

Electronic cistern frame set.

Touch free concealed cistern system, complete with an iron frame for wall hung toilet. Activated by a dual flush IR sensor. Includes a piezo flush button for alternative options, and an integral overflow pipe (warning pipe) to prevent flooding.

Includes a primary cleaning flush.

* Toilet bowl not included

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination
- Suitable for installations in solid or drywall construction
- Contains 9 mm holes for use in wood frame construction
- Galvanized leg support, adjustable height 0-200 mm
- Powder coated, Blue color
- Rotating foot plate
- For structures on the floor, leg supports retractable to -50 mm
- Supplied with all the needed fixing accessories
- Stop valve with throttle pre-mounted
- Protection cover that protects the service opening against moisture and dirt and can be cut to length
- Frame with C profile 40/40 mm
- Frame height from 1140 mm to 1340 mm



LEED RATING



PICTURE	PRODUCT NAME	MODEL FEATURES	POWER SUPPLY	CODE NUMBER	DRAWING
	ARTIS G	Features touch override flush piezo button.	IP68 encapsulated switching 12V adaptor	800410	

COMPONENTS & ACCESSORIES

141-150



REMOTE CONTROLS **143-144**



SOAP DISPENSERS **144**
REMOTE CONTROLS



MIXING VALVES **145-146**



SOLENOID KEY **146**



PERFECT TIME **146**
CONTROL ASSEMBLY



COVER PLATE **146**



DEFAULT TRANSFORMERS **147**
FOR FAUCETS, URINALS,
TOILETS AND SHOWERS




IP68 **147**
ENCAPSULATED
TRANSFORMERS FOR
FAUCETS, URINALS,
TOILETS AND SHOWERS
FOR WET AREAS



IP68 ENCAPSULATED **148**
SWITCHING
TRANSFORMERS FOR
CISTERNS



TRANSFORMERS **148**
FOR SOAP
DISPENSERS



POWER SPLITTERS **149**



CABLE EXTENSIONS **149**



JUNCTION BOXES **150**




BATTERY BOXES **150**

REMOTE CONTROL

Allows easy maintenance of extensive installations requiring custom settings.

The remote control allows adjustment of sensor features for all Stern electronic products, while some functions require a compatible product model:


- Sensor range
- Entrance to the self adjustment mode
- Security time
- Short flow time
- Flow time
- Delay in
- Delay out
- 24 hour hygiene flush
- Lock out time
- Temporary off
- Reset

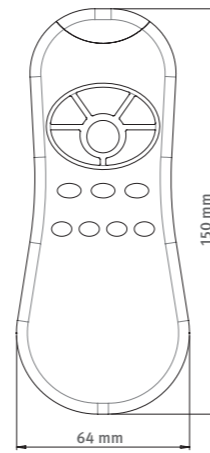

SOAP & WATER REMOTE CONTROL

Code Number: 07100014

In addition to the possibility to change settings at liquid or foam soap dispensers, this remote control allows to change settings at Stern matching touch free faucets. The following functions and settings can be changed:

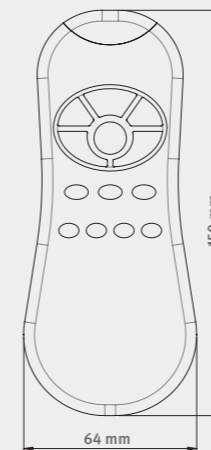

LIQUID SOAP DISPENSERS REMOTE CONTROL

Adjustable settings:

- Soap dosage
- Soap tank refill
- Temporary shutoff function
- Reset to factory settings

PICTURE	CODE NUMBER	DRAWING
	07100008	

FOAM SOAP DISPENSERS REMOTE CONTROL

Adjustable settings:

- Soap dosage
- Air quantity
- Temporary shutoff function
- Soap tank refill
- Reset to factory settings

PICTURE	CODE NUMBER	DRAWING
	07100009	

UNDERBASIN TMV

THERMOSTATIC MIXING VALVE

Advantages:

- Easy installation, connects directly to angle valves under the basin
- Thermostatic control for optimum temperature control
- Can connect up to 4 faucets simultaneously
- Includes hot water stop function to prevent scalding
- Built-in filters to prevent dirt entering the system.
- Back check valves prevent hot water entering cold water inlet.



PICTURE	PRODUCT NAME	MODEL FEATURES	CODE NUMBER	DRAWING
	UNDERBASIN TMV	G 3/8" inlet	07200069 (without connection kit) 1 unit	
			07200069 (with connection for US) 1 unit	
			07200075 (without connection kit) 12 units	
			07200073 (with connection for US) 12 units	
	UNDERBASIN TMV CONNECTION KIT	Includes 1 X flexible hose 3/8", 1 X 90° brass arch, 1 X T-piece 3/8".	07291113	

PICTURE	PRODUCT NAME	ADVANTAGES	MODEL FEATURES	CODE NUMBER	DRAWING
	INTEGRATED THERMOSTATIC MIXING VALVE	<ul style="list-style-type: none"> • Includes built in filters and check valves. • Easy installation • Thermostatic control for optimum temperature • Can accommodate connection of up to three (3) faucets. 	G - 1/2" inlet	07010198	
	INTEGRATED THERMOSTATIC MIXING VALVE 6-PACK			07201001	

PICTURE	PRODUCT NAME	ADVANTAGES	MODEL FEATURES	CODE NUMBER	DRAWING
	STERN MIXING VALVE 3/8"	Mechanical Mixing Valve Includes built in filters and check valves.	G - 3/8" inlet	200060	
	STERN MIXING VALVE 3/8" WITH NUT			200065	
	STERN MIXING VALVE 1/2"			200070	










PICTURE	PRODUCT NAME	ADVANTAGES	CODE NUMBER	DRAWING
	PERFECT TIME SH CONTROL ASSEMBLY WPC	Electronically operated self closing shower panel operated by touch. Operated by a Piezo button in the shower panel. Includes the control panel only.	07040312	
	COVER PLATE KIT	28 mm / 4" deck panel kit. One hole cover panel, for single hole mount faucets. Covers 28 mm diameter / 4" mounting holes. Complete kit with gasket and screw.	07275004	

PICTURE	PRODUCT NAME	CODE NUMBER	DRAWING
	SOLENOID KEY	07590009	

PLUG IN TRANSFORMERS FOR FAUCETS, URINALS, TOILETS AND SHOWERS


Transformers with 5 meter cable male/female waterproof connector (CE, RoHS, UL).











TECHNICAL CHARACTERISTICS	
INPUT VOLTAGE	100 - 240V
OUTPUT VOLTAGE	9V
FREQUENCY	50 - 60 HZ
OUTPUT CURRENT	500 MA

PICTURE	PRODUCT NAME	CONNECTOR	CODE NUMBER	12-PACK CODE
	SWITCHING TRANSFORMER EU	MALE 	06522091	06540002
		FEMALE 	06522094	06540003
	SWITCHING TRANSFORMER UK	MALE 	06522088	06540004
		FEMALE 	06522093	06540005
	SWITCHING TRANSFORMER US	MALE 	06522115	06540006
		FEMALE 	06522116	06540007
	SWITCHING TRANSFORMER AU	MALE 	06522089	06540008
		FEMALE 	06522095	06540009

IP68 SWITCHING TRANSFORMERS FOR FAUCETS, URINALS, TOILETS AND SHOWERS

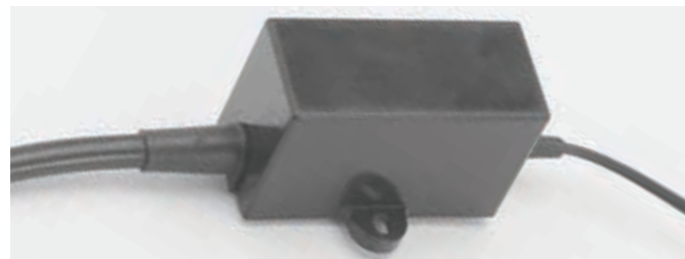IP68 Switching transformer for wet areas with 5m cable and male/female waterproof connector (CE, RoHS, CB).









PRODUCT NAME	CONNECTOR	INPUT VOLTAGE	OUTPUT VOLTAGE	FREQUENCY	OUTPUT CURRENT	CODE NUMBER	7-PACK CODE
IP68 SWITCHING NO PLUG	MALE 	110-240V	9V	50/60 HZ	300 MA	06522065	06523000
	FEMALE 					06522070	06523001
IP68 SWITCHING EU	MALE 	110-240V	9V	50/60 HZ	300 MA	06522097	06523002
	FEMALE 					06522098	06523003
IP68 SWITCHING UK	MALE 	110-240V	9V	50/60 HZ	300 MA	06522101	06523004
	FEMALE 					06522102	06523005
IP68 SWITCHING US	MALE 	110-240V	9V	50/60 HZ	300 MA	06522099	06523006
	FEMALE 					06522100	06523007
IP68 SWITCHING AU	MALE 	110-240V	9V	50/60 HZ	300 MA	06522103	06523008
	FEMALE 					06522104	06523009

IP68 ENCAPSULATED SWITCHING TRANSFORMER FOR CISTERNS

IP68 Encapsulated switching transformer with 5 meter cable and male/female waterproof connector (CE, RoHS, UL). Suitable for multiple products installation with electrical connection when combined with the appropriate power splitter. See page 143.











PRODUCT NAME	CONNECTOR	INPUT VOLTAGE	OUTPUT VOLTAGE	FREQUENCY	OUTPUT CURRENT	CODE NUMBER
IP68 ENCAPSULATED SWITCHING TRANSFORMER EU PLUG FOR CISTERNS	MALE 	110-240V	12V	50/60 HZ	2.5 A	06522077
	FEMALE 					06522078
IP68 ENCAPSULATED SWITCHING TRANSFORMER UK PLUG FOR CISTERNS	MALE 	110-240V	12V	50/60 HZ	2.5 A	06522071
	FEMALE 					06522072
IP68 ENCAPSULATED SWITCHING TRANSFORMER US PLUG FOR CISTERNS	MALE 	110-240V	12V	50/60 HZ	2.5 A	N/A
	FEMALE 					N/A

TRANSFORMERS FOR SOAP DISPENSERS








12V switching adaptor with 5 meter cable and male waterproof connector.

PICTURE	PRODUCT NAME	INPUT VOLTAGE	OUTPUT VOLTAGE	FREQUENCY	OUTPUT CURRENT	CODE NUMBER
	12V TRANSFORMER - UNIVERSAL INCLUDES PLUGS FOR EU, US AND UK	110-240V	12V	50/60 HZ	500 MA	06522082
	12V TRANSFORMER - EU	110-240V	12V	50/60 HZ	500 MA	06522081
	12V TRANSFORMER - USA	110-240V	12V	50/60 HZ	500 MA	06522117
	12V TRANSFORMER - AU	110-240V	12V	50/60 HZ	500 MA	06522085
	12V TRANSFORMER - UK	110-240V	12V	50/60 HZ	500 MA	06522086


POWER SPLITTERS

DRAWING	PRODUCT NAME	MODEL FEATURES	CODE NUMBER
	POWER SPLITTER 2 WAYS F-M2	Cable length to product: 100 mm Cable length to power supply: 100 mm	06001001
	POWER SPLITTER 2 WAYS M-F2	Cable length to product: 100 mm Cable length to power supply: 100 mm	06001004
	POWER SPLITTER 3 WAYS F-M3	Cable length to product: 100 mm Cable length to power supply: 100 mm	06001002
	POWER SPLITTER 2 WAYS M-F3	Cable length to product: 100 mm Cable length to power supply: 100 mm	06001005
	POWER SPLITTER SOAP & WATER 2 WAYS F-M/F	To be used with 12V transformer. For connection of one soap dispenser and one faucet. Cable length to product: 100 mm. Cable length to power supply: 100 mm	06001025
	POWER SPLITTER SOAP 2 WAYS F-M2	To be used with 12V, 2.5 A transformer. For multiple connection of 2 soap dispensers. Cable length to product: 500 mm Cable length to power supply: 100 mm	06001026
	POWER SPLITTER SOAP 3 WAYS F-M3	To be used with 12V, 2.5 A transformer. For multiple connection of 3 soap dispensers. Cable length to product: 1X500 mm, 2X1500 mm. Cable length to power supply: 100 mm	06001027
	POWER SPLITTER SOAP 4 WAYS F-M4	To be used with 12V, 2.5 A transformer. For multiple connection of 4 soap dispensers. Cable length to product: 2X500 mm, 2X1500 mm. Cable length to power supply: 100 mm	06001028



CABLE EXTENSION

DRAWING	PRODUCT NAME	CODE NUMBER
	CABLE EXTENSION 100 MM MALE/FEMALE	06000064
	CABLE EXTENSION 100 MM MALE/MALE	06009018
	CABLE EXTENSION 100 MM FEMALE/FEMALE	06009022
	CABLE EXTENSION 100 MM MALE/FEMALE	06000004
	CABLE EXTENSION 100 MM FEMALE/OPEN	06000003
	CABLE EXTENSION 100 MM MALE/BATTERY	06000029
	CABLE EXTENSION 100 MM FEMALE/BATTERY	06000050

JUNCTION BOXES

DRAWING	PRODUCT NAME	MODEL FEATURES	INPUT VOLTAGE	OUTPUT VOLTAGE	FREQUENCY	OUTPUT CURRENT	CODE NUMBER
	JUNCTION BOX WITH TRANSFORMER FOR FAUCETS, URINALS, TOILETS AND SHOWERS	Connection point of up to 10 products together. Includes a 12VDC 2 Amp power supply transformer	115-230V	12V	60 HZ	2.1 A	06530013
	JUNCTION BOX WITH TRANSFORMER FOR SOAP DISPENSERS	Connection point of up to 10 Soap Dispensers or 10 ring illuminated products. Includes a 12VDC 4.2 Amp power supply transformer.	115-230V	12V	60 HZ	4.2 A	06530062

CABLES FOR JUNCTION BOX

DRAWING	PRODUCT NAME	MODEL FEATURES	CODE NUMBER
	OUTPUT CABLE FOR JUNCTION BOX	3 meters male connector	06000084
	OUTPUT CABLE FOR JUNCTION BOX	3 meters female connector	06000086

BATTERY BOXES

PICTURE	PRODUCT NAME	REQUIRED BATTERIES	CONNECTOR	CODE NUMBER	12- PACK CODE	15-PACK CODE
	IP67 BLACK BATTERY BOX	6x1.5V AA batteries	Male waterproof connector	06530092	N/A	06533002
		6x1.5V AA batteries (Not supplied)		06530096	N/A	06533000
		6x1.5V AA batteries	Female waterproof connector	06530093	N/A	06533003
		6x1.5V AA batteries (Not supplied)		06530091	N/A	06533001
	IP67 9V BLACK BATTERY BOX	9V Battery (Alkaline or Lithium)	Male waterproof connector	06530080	N/A	N/A
			Female waterproof connector	06530089	N/A	N/A
	BATTERY BOX FOR SOAP DISPENSERS	6xDD batteries	Male waterproof connector	06530041	N/A	N/A

ALPHABETIC INDEX

PRODUCT	PN	PAGE	PRODUCT	PN	PAGE
12V transformer - AU	06522085	148	Csaba 1000 E	233030	4
12V transformer - EU	06522081	148	Csaba Soap Dispenser B	233110	62
12V transformer - Universal	06522082	148	Csaba Soap Dispenser E	233100	62
12V transformer - USA	06522080	148	Csaba SD B 6-PACK	233111	62
12V transformer - UK	06522086	148	Csaba SD E 6-PACK	233101	62
Adjustment arm for C57(verB)	07120348	132	Csaba SD 1.6 E	233102	62
Apollo ALB	340600	54	D28 B	352000	40
Apollo ALE	340700	54	D28 B AISI316	352130	40
Apollo Free	340100	57	D28 DP Soap&Water KE	500100	135
Apollo Medical B	314500	55	D28 DPB	352300	40
Apollo Medical E	314510	55	D28 DPB AISI316	352301	40
Apollo Medical FB	314530	55	D28 DPE	352400	40
Apollo Medical FE	314540	55	D28 DPE AISI316	352401	40
APS Kit for faucet	07225008	58	D28 E	352100	40
APS kit for Toilet	07225018	130	D28 E AISI316	352120	40
APS Threaded rod Kit shower	07226054	110	D28 Prox B	352600	40
Artis G	800410	140	D28 Prox E	352610	40
Battery box for soap dispensers	06530041	150	D28 Touch Dual Power B	352700	41
BTM soap dispenser B	280210	96	D28 Touch Dual Power E	352710	41
BTM soap dispenser E	280200	96	DF El. Cistern Valve w/override	07140067	132
BTM Foam E	280250	96	Dolphin 1000 FB	270320	34
BTM Faucet E	280300	95	Dolphin 1000 FE	270330	34
BTM Faucet B	280310	95	Dolphin FB	270170	34
Cable extension 100 mm female/battery	06000050	149	Dolphin FE	270180	34
Cable extension 100 mm female/female	06009022	149	Dolphin GB	270120	34
Cable extension 100 mm female/open	06000003	149	Dolphin GE	270220	34
Cable extension 100 mm male/battery	06000029	149	Easy 1000 VB	246050	28
Cable extension 100 mm male/female	06000064	149	Easy 1000 VE	246060	28
Cable extension 100 mm male/open	06000004	149	Easy B	246010	28
Cable extension 100 mm male/male	06009018	149	Easy E	246020	28
Classic AB 1953	291010	32	Electromagnetic SF cistern	620620	132
Classic 1000 AB 1953	292020	32	Electromagnetic DF cistern	620630	132
Classic 1000 B AB 1953	292120	32	Elite 1000 B	236700	17
Classic 1000 E AB 1953	292230	32	Elite 1000 B with technician's mixer	236720	18
Classic B AB 1953	291110	32	Elite 1000 E	236800	17
Classic E AB 1953	291210	32	Elite 1000 E AISI316	236803	17
Classic CS B	293100	32	Elite 1000 E with technician's mixer	236805	18
Classic CS E	293200	32	Elite 1000 LB	236550	18
Classic Foam E	292300	63	Elite 1000 LE	236650	18
Classic Soap Dispenser B	292400	63	Elite 1000 Plus B	236750	18
Classic Soap Dispenser E	292410	63	Elite 1000 Plus E	236850	18
Classic Foam E 6-pack	292300	64	Elite 1000 Plus E AISI316	236453	18
Classic SD B 6-pack	250921	64	Elite SD 1.6 E	236216	70
Classic SD E 6-pack	250911	64	Elite SD 1.6 E AISI316	236126	72
Classic SD 1.6 E	292416	64	Elite B	236300	17
Condor	210000	33	Elite E	236400	17
Condor 1010	210100	33	Elite E AISI316	236404	17
Condor 1010 E	210300	33	Elite foam E	236120	69
Condor E	210200	33	Elite foam 6-pack E	236121	70
Cool B	280115	36	Elite foam 6-pack E AISI316	236123	72
Cool BRE	280100	36	Elite foam soap dispenser E	236120	69
Cool E	280110	36	Elite foam soap dispenser E AISI316	236120	71
Cool GB	280125	36	Elite LB	236500	17
Cool GBRE	280120	36	Elite LE	236600	17
Cool GE	280130	36	Elite Plus B	236350	18
Cover Plate	07275004	146	Elite Plus E	236450	18
Csaba B	233000	4	Elite SD 6-pack B	236111	70
Csaba E	233010	4	Elite SD 6-pack B AISI316	236114	72
Csaba 1000 B	233020	4	Elite SD 6-pack E	236101	70

ALPHABETIC INDEX

PRODUCT	PN	PAGE	PRODUCT	PN	PAGE
Elite SD 6-pack E AISI316	236117	72	Extreme soap dispenser E	237900	67
Elite SD Plus B AISI316	236108	72	Extreme SD B 6-pack	237921	68
Elite SD Plus E AISI316	236106	72	Extreme SD E 6-pack	237901	68
Elite soap dispenser B	236110	69	Extreme SD plus B 6-pack	237923	68
Elite soap dispenser B AISI316	236113	71	Extreme SD plus E 6-pack	237906	68
Elite soap dispenser E	236100	69	Extreme soap dispenser plus B	237922	67
Elite soap dispenser E AISI316	236103	71	Extreme soap dispenser plus E	237905	67
Elite soap dispenser plus B	236107	70	Extreme touch 1000 B	237110	15
Elite SD Plus B 6-Pack	236108	70	Extreme touch 1000 BRE	237020	15
Elite soap dispenser plus B AISI316	236109	72	Extreme touch 1000 E	237010	15
Elite soap dispenser plus E	236105	70	Extreme touch B	237210	15
Elite SD Plus E 6-Pack	236106	70	Extreme touch BRE	237320	15
Elite soap dispenser plus E AISI316	236104	72	Extreme touch E	237310	15
Ever HD	230510	89	Foam soap dispensers remote control	07100009	146
Extension kit Apollo AL	07240060	54	Foot washfree	113730	111
Extension kit for wave/prox sensor	07240061	54	Foot Washfree 3000	113720	111
Extreme 1000 Plus B	237150	13	Free	113100	118
Extreme 1000 Plus E	237050	13	Free E	113200	118
Extreme 1000B	237100	12	Free SP	800504	118
Extreme 1000 BRE	237005	14	Green AB 1953	225901	22
Extreme 1000E	237000	12	Green 1000 AB 1953	225801	22
Extreme 1000 LFB	237102	11	Green 1000 B AB 1953	225871	22
Extreme 1000 LFE	237003	11	Green 1000 BRE AB 1953	225891	22
Extreme 1000 LFB AISI316	237103	11	Green 1000 E AB 1953	225821	22
Extreme 1000 LFE AISI316	237004	11	Green 28 foam E	352920	76
Extreme B	237200	12	Green 28 foam 6-pack	352921	76
Extreme BRE	237305	14	Green 28 SD B 6-pack	352901	76
Extreme CS B	237801	50	Green 28 SD E 6-pack	352911	76
Extreme CS B AISI316	237801-316	50	Green 28 soap dispenser B	352900	76
Extreme CS E	237800	50	Green 28 soap dispenser E	352910	76
Extreme CS E AISI316	237800-316	50	Green 28 SD 1.6 E	352916	76
Extreme CS DPB	237802	50	Green B AB 1953	225951	22
Extreme CS DPB AISI316	237802-316	50	Green BRE AB 1953	225921	22
Extreme CS DPE	237803	50	Green E AB 1953	225941	22
Extreme CS DPE AISI316	237803-316	50	Green foam E	225842	74
Extreme CS soap dispenser B	237891	83	Green foam E 6-pack	225843	74
Extreme CS soap dispenser B AISI316	237891-316	83	Green SD B 6-pack	225846	74
Extreme CS soap dispenser E	237890	83	Green SD E 6-pack	225841	74
Extreme CS soap dispenser E AISI316	237890-316	83	Green SD 1.6 E	225816	74
Extreme CS SD B 6-pack	237894	83	Green soap dispenser B	225845	74
Extreme CS SD E 6-pack	237893	83	Green soap dispenser E	225840	74
Extreme CS SD B AISI316 6-pack	237898	83	Green time AB 1953	225911	24
Extreme CS SD E AISI316 6-pack	237899	83	Green time 1000 AB 1953	225811	24
Extreme E	237300	12	Green time 1000 B AB 1953	225881	24
Extreme Habitat E	237040	14	Green time 1000 BRE AB 1953	225836	24
Extreme HLB	237317	13	Green time 1000 E AB 1953	225831	24
Extreme HLE	237316	13	Green time B AB 1953	225981	24
Extreme HLB LF	237340	13	Green time BRE AB 1953	225926	24
Extreme HLE LF	237341	13	Green time E AB 1953	225971	24
Extreme Plus B	237250	13	Integrated thermostatic mixing valve	07010198	146
Extreme Plus E	237350	13	Integrated thermostatic mixing valve 6-pack	07201001	146
Extreme LFB	237820	11	IP67 9V Black battery box female connector	06530080	150
Extreme LFB AISI316	237821	11	IP67 9V Black battery box male connector	06530089	150
Extreme LFE	237810	11	IP67 Black battery box female connector (without batteries)	06530091	150
Extreme LFE AISI316	237811	11	IP67 Black battery box female connector	06530093	150
Extreme SD 1.6 E	237916	68	IP67 Black battery box male connector (without batteries)	06530083	150
Extreme soap dispenser B	237920	67	IP67 Black battery box male connector	06530092	150
Extreme SD B 6-pack	237921	68	IP68 Switching transformer no plug male connector	06522065	147

ALPHABETIC INDEX

PRODUCT	PN	PAGE
IP68 Encap.Switch 13.5V/2.5A Transformer EU-M	06522142	132
IP68 Switching transformer no plug female connector	06522070	147
IP68 Switching transformer EU male connector	06522097	147
IP68 Switching transformer EU female connector	06522098	147
IP68 Switching transformer UK male connector	06522101	147
IP68 Switching transformer UK female connector	06522102	147
IP68 Switching transformer US male connector	06522099	147
IP68 Switching transformer US female connector	06522100	147
IP68 Switching transformer AU male connector	06522103	147
IP68 Switching transformer AU female connector	06522104	147
IP68 Encapsulated switching transformer eu plug for cisterns female connector	06522078	148
IP68 Encapsulated switching transformer EU plug for cisterns male connector	06522077	148
IP68 Encapsulated switching transformer UK plug for cisterns female connector	06522072	148
IP68 Encapsulated switching transformer UK plug for cisterns male connector	06522071	148
Junction box with transformer for faucets, urinals, toilets and showers	06530013	150
Junction box with transformer for soap dispensers	06530062	150
Jupiter 1011	132100	117
Jupiter 1032	134510	117
Jupiter 1032 E	134520	117
Jupiter 2040	125900	115
Jupiter 2040 E	125901	115
Jupiter 2040 H	125910	115
Jupiter 2040 HE	125911	115
Jupiter 2040 K	800241	139
Jupiter 2040 KE	800251	139
Jupiter 3002 EM	140315	119
Jupiter 3002 M	140215	119
Jupiter M 0.5 GPF	140112	119
Jupiter ME 0.5 GPF	140516	119
Long bracket 200 mm (Washfree 1000)	07055175	57
Malmo	225865	42
Malmo 1000	225860	42
Malmo 1000 DP Soap&Water KE	500350	136
Medical 1000 TE	314600	55
MF Behind mirror SD	07292223	96
MF BTM Foam	07292270	96
MF Classic Foam Dispenser	07292207	64
MF Classic soap Dispenser	07292177	64
MF Elite Foam Dispenser	07292205	70
MF Elite SD Plus	07292093	70
MF Elite Soap Dispenser	07292077	70
MF Elite Foam Dispenser AISI316	07292240	72
MF Elite SD Plus AISI316	07292241	72
MF Elite Soap Dispenser AISI316	07292239	72
MF Extreme Plus Soap Dispenser	07292095	68
MF Extreme Soap Dispenser	07292056	68
MF Green 28 Foam Dispenser	07292206	76
MF Green 28 Soap Dispenser	07292155	76
MF Green Foam Dispenser	07292228	74
MF Green Soap Dispenser	07292062	74
MF Quadrat 2030 Soap Dispenser	07292094	82
MF Quadrat Soap Dispenser	07292078	82
MF Trendy Foam Dispenser	07292183	66
MF Trendy Plus Soap Dispenser	07292099	66
MF Trendy Soap Dispenser	07292073	66

PRODUCT	PN	PAGE
MF Tubular Soap Dispenser 2030	07292081	78
MF Tubular Foam Dispenser	07292186	78
MF Tubular Soap Dispenser	07292076	78
MF Tubular Foam Dispenser AISI316	07292231	80
MF Tubular Soap Dispenser AISI316	07292221	80
MF Tubular 2030 Soap Dispenser AISI316	07292222	80
Multifeed kit	07220096	84
Nara 2022	160750	124
Nara 2022 E	160700	124
Nara 2030	170200	116
Nara 2030 E	170100	116
Nara 2030 K	800277	139
Nara 2030 KE	800278	139
Nara 2032	160310	123
Nara 2032 E	160410	123
Nara 2032 K	800271	137
Nara 2032 KE	800276	137
Nara 2032 P	160610	124
Nara 2032 PE	160510	124
Nara 2032 PK	800287	137
Nara 2032 PKE	800279	137
Nara 3002	160810	122
Nara 3002 E	160820	122
Nara 3002 P	160830	122
Nara 3002 PE	160840	122
Nara ECO 2032	160320	123
Nara ECO 2032 E	160330	123
Nara ECO 2032 PE	160340	124
Nara Q	360510	53
Nara QE	360500	53
Neptune 1032	613200	109
Neptune 1032 E	613400	109
Neptune 1042 T	612280	105
Neptune 1042 TE	612281	105
Neptune Medical 1000 T	610250	107
Neptune Medical 1000 T Bottom outlet	610255	107
Neptune shower panel 1000 TB	602410	100
Neptune shower panel 1000 TE	604410	100
Neptune shower panel B	601410	100
Neptune shower panel E	603410	100
Noble 3032 P	460720	121
Noble 3032 PE	460730	121
Noble 3032	460700	121
Noble 3032 E	460710	121
Output cable for junction box	06000084	150
Output cable for junction box	06000086	150
Perfect time SH 1032	613700	109
Perfect time SH 1032 E	613800	109
Perfect time 1042 T	612253	106
Perfect time 1042 TE	612254	106
Perfect time 2032 E	410761	127
Perfect time 2032KE	800286	138
Perfect time SH control assembly WPC	07040312	146
Perfect Time shower panel 1000 TB	602400	102
Perfect Time shower panel 1000 TB w/ hand shower	602401	102
Perfect Time shower panel 1000 TE	604400	102
Perfect Time shower panel 1000 TE w/ hand shower	604401	102

ALPHABETIC INDEX

PRODUCT	PN	PAGE
Perfect Time shower panel B	601400	102
Perfect Time shower panel E	603400	102
Perfect Time shower panel LB	601402	102
Perfect Time shower panel M	607200	104
Perfect Time shower panel TM	607100	104
Piezo kit for W.C. with distant control	07226042	129
Power splitter 2 ways F-M2	06001001	149
Power splitter 2 ways M-F2	06001004	149
Power splitter 2 ways M-F3	06001005	149
Power splitter 3 ways F-M3	06001002	149
Power splitter soap & water 2 ways F-M2	06001025	149
Power splitter soap 2 ways F-M2	06001026	149
Power splitter soap 3 ways F-M3	06001027	149
Power splitter soap 4 ways F-M4	06001028	149
PPS high security kit for shower	07226033	110
Programmable piezo kit for shower	07225019	110
Programmable piezo kit for beach shower columns	07226050	110
Prox & wave sensor kit for toilet	620100	131
Prox kit for toilet	620100	130
Prox Kit for faucet	620200	58
Prox Kit for shower	620000	110
Prox Kit for Urinal	620700	120
Prox Kit for toilet	620100	130
Prox kit front fixation for urinal	620750	120
Quadrat 2030 B	351300	52
Quadrat 2030 E	351400	52
Quadrat 2030 LB	351305	52
Quadrat 2030 LE	351405	52
Quadrat 2030 SD 1.6 E	351316	82
Quadrat 2030 soap dispenser B 6-pack	351921	82
Quadrat 2030 soap dispenser E 6-pack	351931	82
Quadrat B	351100	52
Quadrat E	351200	52
Quadrat DP Soap&Water KE	500400	136
Quadrat LB	351105	52
Quadrat LE	351205	52
Quadrat SD 1.6 E	351916	82
Quadrat soap dispenser 2030 B	351920	81
Quadrat soap dispenser 2030 E	351930	81
Quadrat soap dispenser B	351910	81
Quadrat soap dispenser B 6-pack	351911	82
Quadrat soap dispenser E	351900	81
Quadrat soap dispenser E 6-pack	351901	82
Remote Control	07100005	143
Remote control for foam soap dispensers	07100009	144
Remote control for liquid soap dispenser	07100008	144
Remote control for soap & water	07100014	144
Set of pipes	07291037	124
SH 3000	600100	99
SH 9000	600400	99
SH 9020	600420	99
Sleeve Kit for SH 9000	07240046	99
Smart 1000 B	235500	20
Smart 1000 E	235600	20
Smart 1000 LB	235510	20
Smart 1000 LE	235610	20
Smart 1000 Plus B	235550	20

PRODUCT	PN	PAGE
Smart 1000 Plus E	235650	20
Smart B	235100	20
Smart E	235200	20
Smart LB	235110	20
Smart LE	235210	20
Smart Plus B	235150	20
Smart Plus E	235250	20
Solenoid Key	07590009	146
Stern mixing valve 1/2"	200070	146
Stern mixing valve 3/8"	200060	146
Stern mixing valve 3/8" with nut	200065	146
SWA Module	280400	94
SWAR Module	280460	91
SWA HI-SPEED Module	280410	92
Swan 1000 AB 1953	252210	30
Swan 1000 B AB 1953	252310	30
Swan 1000 BM	252301	30
Swan 1000 E AB 1953	252420	30
Swan 1000 EM	252401	30
Swan 1010 AB 1953	250220	30
Swan 1010 B AB 1953	250310	30
Swan 1010 E AB 1953	250420	30
Switching transformer AU female connector	06522095	147
Switching transformer AU male connector	06522089	147
Switching transformer EU female connector	06522094	147
Switching transformer EU male connector	06522091	147
Switching transformer UK female connector	06522093	147
Switching transformer UK male connector	06522088	147
Switching transformer US female connector	06522092	147
Switching transformer US male connector	06522090	147
Thermix SH 1000 T	610400	108
Top Filling Multifeed Kit	07220090	85
Top Filling Multifeed Kit with Soap Level Indicator	07220152	85
Touch B	225100	26
Touch BRE	225500	26
Touch E	225200	26
Touch Free B AB 1953	225610	25
Touch Free E AB 1953	225710	25
Touch SH 1000 T	620710	108
Touch SH 1000 T Bottom outlet	620700	108
Trendy 1000 BRE	239305	7
Trendy 1000 Plus B	239250	6
Trendy 1000 Plus E	239350	6
Trendy 1000B	239200	6
Trendy 1000E	239300	6
Trendy 1000LB	239600	6
Trendy 1000 LE	239700	6
Trendy B	239000	6
Trendy BRE	239105	7
Trendy E	239100	6
Trendy Foam E	239930	65
Trendy Foam E 6-pack	239931	66
Trendy Habitat	239340	7
Trendy LB	239400	6
Trendy LE	239500	6
Trendy Plus B	239050	6
Trendy Plus E	239150	6

ALPHABETIC INDEX

PRODUCT	PN	PAGE	PRODUCT	PN	PAGE
Trendy SD 1.6 E	239916	66	Tubular SD 2030 E AISI316 6-pack	350984	80
Trendy SD B 6-Pack	239911	66	Tubular SD B AISI316 6-pack	350992	80
Trendy SD E 6-Pack	239902	66	Tubular SD E AISI316 6-pack	350933	80
Trendy soap dispenser B	239910	65	Tubular soap dispenser 2030 B	350922	77
Trendy soap dispenser E	239900	65	Tubular soap dispenser 2030 E	350927	77
Trendy soap dispenser plus B	239912	66	Tubular soap dispenser B	350920	77
Trendy soap dispenser plus E	239902	66	Tubular soap dispenser E	350925	77
Trendy SD Plus B 6-pack	239913	66	Tubular soap dispenser B AISI316	350919	79
Trendy SD Plus E 6-pack	239903	66	Tubular soap dispenser E AISI316	350924	79
Trendy TB	236930	9	Tubular soap dispenser 2030 B AISI316	350918	79
Trendy TE	236935	9	Tubular soap dispenser 2030 E AISI316	350917	79
Trendy touch 1000 B	239220	8	Tubular TB	350202	45
Trendy touch 1000 BRE	239330	8	Tubular TE	350102	45
Trendy touch 1000 E	239320	8	Tubular touch 2030 B	350350	47
Trendy touch B	239020	8	Tubular touch 2030 BRE	350460	48
Trendy touch BRE	239130	8	Tubular touch 2030 BR LE	350330	48
Trendy touch E	239120	8	Tubular touch 2030 E	350450	47
Tubular 1000 B	350800	45	Tubular touch 2030 LB	350320	47
Tubular 1000 B Box	350900	45	Tubular touch 2030 LE	350420	47
Tubular 1000 E	350850	45	Tubular touch B	350140	47
Tubular 1000 E Box	350950	45	Tubular touch BRE	350170	48
Tubular 2030 B	350300	44	Tubular touch BR LE	350180	48
Tubular 2030 E	350400	44	Tubular touch E	350130	47
Tubular 2030 LB	350310	44	Tubular touch LB	350250	47
Tubular 2030 LE	350410	44	Tubular touch LE	350150	47
Tubular B	350200	43	Tubular wave DP LE	350190	46
Tubular B AISI316	350208	43	Tubular XLB	350215	45
Tubular CB	350500	44	Tubular XLE	350415	45
Tubular CE	350600	44	Under the deck Multifeed kit	07220096	85
Tubular DMB	350700	27	Underbasin TMV	07200069	145
Tubular DME	350750	27	Underbasin TMV connection kit	07200069	145
Tubular DP Soap&Water KE	500200	135	Venus 1.28 GPF	420242	128
Tubular DP Trio KE	500120	135	Venus 3002	420255	128
Tubular E	350100	43	Venus 3002 E	420231	128
Tubular E AISI316	350109	43	Venus 3002 R	420241	128
Tubular foam E	350980	78	Venus 3002 RE	420265	128
Tubular foam E AISI316	350982	80	Venus 3003R PE	420280	128
Tubular foam E 6-pack	350980	78	Venus comfort 2032	410562	126
Tubular foam E AISI316 6-pack	350983	80	Venus comfort 2032 DF	410446	127
Tubular LB	350210	44	Venus comfort 2032 DFE	410447	127
Tubular HD	350030	90	Venus Comfort 2032 DF K	800221	138
Tubular HD AISI316	350040	90	Venus Comfort 2032 DF KE	800236	138
Tubular DP HD	350020	90	Venus comfort 2032 E	410541	119
Tubular DP HD AISI316	350010	90	Venus Comfort 2032 K	800206	138
Tubular LE	350120	44	Venus Comfort 2032 KE	800218	138
Tubular Perth B	350207	45	Venus comfort 2032 P	410576	126
Tubular Perth E	350107	45	Venus comfort 2032 PE	410546	126
Tubular SD 2030 B 6-pack	350923	78	Venus E 1.28 GPF	420232	128
Tubular SD 2030 E 6-pack	350928	78	Venus XS 2032 E	410601	126
Tubular SD 1.6 E	350116	78	Washfree 1000	316010	57
Tubular SD 1.6 E AISI316	350932	80	Wave Kit for faucet	620400	58
Tubular SD B 6-pack	350921	78	Wave Kit for shower	620810	110
Tubular SD E 6-pack	350926	78	Wave on-off kit for toilet	620600	130
Tubular 2030 SD 1.6 E	350816	78	Wave On/Off for Cistern	07224101	132
Tubular 2030 SD 1.6 E AISI316	350916	80			
Tubular SD 2030 B AISI316 6-pack	350991	80			



www.sternfaucets.com
www.sternfaucets.es
www.sternfaucets.ru
www.sternswitches.com

