

PERFECT TIME SH 1032 ELECTRONIC SHOWER CONTROL

SPECIFICATIONS

Self-closing electronic shower control. Activated by touching the designated piezo switch. For cold and premixed water. Includes non-return valves and filters. All components are located inside the product body for added vandal protection. Powered by a 9V battery or a 9V transformer. 24 hour hygiene flush is included. The shower will automatically shut off after a factory set flow time of 2 minutes. Flow time is adjustable on site.

OPERATION

When users touch the designated area in the middle of the piezo surface, a flow cycle of 2 minutes is activated. If the users do not require more water, a second touch stops the water flow before the default flow time has passed.

APPLICATION

The easy touch action allows use by young children, the elderly and the disabled. Ideal for outdoor and indoor installations, hospitals, hotels, spas, resorts, swimming pools and private residences.

PRODUCT AT A GLANCE


Installation	Concealed wall-mounted
Power Supply	<ul style="list-style-type: none"> • 9V battery • 9V transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 PSI
Water supply	Cold and premixed water
Water Temperature	Maximum 70°C

ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL SPECIFICATIONS
PERFECT TIME SH 1032	613700	9V battery	Concealed installation
PERFECT TIME SH 1032 E	613800	9V transformer	

OPTIONS

OPTION	CODE
Remote control	07100005

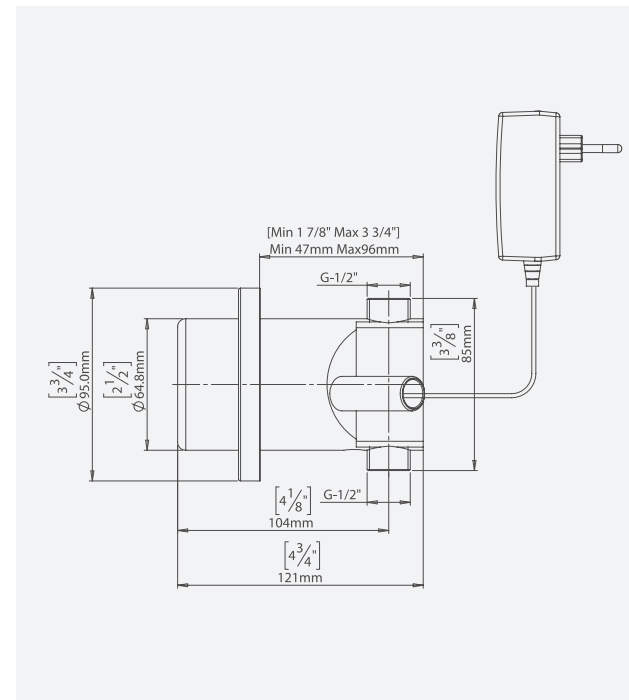

stern
STERN ENGINEERING LTD.

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



ADJUSTABLE SETTINGS



EASY TO INSTALL



PREVENT SCALDING



ADA DESIGNED

APPROVALS



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com